

# General Purpose Transistors

## NPN and PNP Silicon

### MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP, SMMBT3906WT1G, PNP

These transistors are designed for general purpose amplifier applications. They are housed in the SOT-323/SC-70 package which is designed for low power surface mount applications.

#### Features

- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS



Rating	Symbol	Value	Unit
Collector - Emitter Voltage MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$V_{CEO}$	40 -40	Vdc
Collector - Base Voltage MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$V_{CBO}$	60 -40	Vdc
Emitter - Base Voltage MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$V_{EBO}$	6.0 -5.0	Vdc
Collector Current - Continuous MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$I_C$	200 -200	mAdc

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation (Note 1) @ $T_A = 25^\circ\text{C}$	$P_D$	150	mW
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	833	$^\circ\text{C/W}$
Junction and Storage Temperature	$T_J, T_{stg}$	-55 to +150	$^\circ\text{C}$


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Device mounted on FR4 glass epoxy printed circuit board using the minimum recommended footprint.



SC-70 (SOT-323)  
CASE 419  
STYLE 3

#### MARKING DIAGRAM



- xx = AM for MMBT3904WT1,  
SMMBT3904WT  
= 2A for MMBT3906WT1,  
SMMBT3906WT1
- M = Date Code\*
- = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

#### ORDERING INFORMATION

Device	Package	Shipping†
MMBT3904WT1G, SMMBT3904WT1G	SC-70/ SOT-323 (Pb-Free)	3000 / Tape & Reel
MMBT3906WT1G, SMMBT3906WT1G	SC-70/ SOT-323 (Pb-Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

**MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP,  
SMMBT3906WT1G, PNP**

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
<b>OFF CHARACTERISTICS</b>				
Collector – Emitter Breakdown Voltage (Note 2) ( $I_C = 1.0\text{ mAdc}$ , $I_B = 0$ ) ( $I_C = -1.0\text{ mAdc}$ , $I_B = 0$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$V_{(BR)CEO}$	40 –40	– – Vdc
Collector – Base Breakdown Voltage ( $I_C = 10\ \mu\text{Adc}$ , $I_E = 0$ ) ( $I_C = -10\ \mu\text{Adc}$ , $I_E = 0$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$V_{(BR)CBO}$	60 –40	– – Vdc
Emitter – Base Breakdown Voltage ( $I_E = 10\ \mu\text{Adc}$ , $I_C = 0$ ) ( $I_E = -10\ \mu\text{Adc}$ , $I_C = 0$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$V_{(BR)EBO}$	6.0 –5.0	– – Vdc
Base Cutoff Current ( $V_{CE} = 30\text{ Vdc}$ , $V_{EB} = 3.0\text{ Vdc}$ ) ( $V_{CE} = -30\text{ Vdc}$ , $V_{EB} = -3.0\text{ Vdc}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$I_{BL}$	– –	50 –50 nAdc
Collector Cutoff Current ( $V_{CE} = 30\text{ Vdc}$ , $V_{EB} = 3.0\text{ Vdc}$ ) ( $V_{CE} = -30\text{ Vdc}$ , $V_{EB} = -3.0\text{ Vdc}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$I_{CEX}$	– –	50 –50 nAdc
<b>ON CHARACTERISTICS</b> (Note 2)				
DC Current Gain ( $I_C = 0.1\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ ) ( $I_C = 1.0\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ ) ( $I_C = 10\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ ) ( $I_C = 50\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ ) ( $I_C = 100\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ ) ( $I_C = -0.1\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ ) ( $I_C = -1.0\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ ) ( $I_C = -10\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ ) ( $I_C = -50\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ ) ( $I_C = -100\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ )	MMBT3904WT1, SMMBT3904WT1     MMBT3906WT1, SMMBT3906WT1	$h_{FE}$	40 70 100 60 30 60 80 100 60 30	– – 300 – – – – 300 – – –
Collector – Emitter Saturation Voltage ( $I_C = 10\text{ mAdc}$ , $I_B = 1.0\text{ mAdc}$ ) ( $I_C = 50\text{ mAdc}$ , $I_B = 5.0\text{ mAdc}$ ) ( $I_C = -10\text{ mAdc}$ , $I_B = -1.0\text{ mAdc}$ ) ( $I_C = -50\text{ mAdc}$ , $I_B = -5.0\text{ mAdc}$ )	MMBT3904WT1, SMMBT3904WT1  MMBT3906WT1, SMMBT3906WT1	$V_{CE(sat)}$	– – – –	0.2 0.3 –0.25 –0.4 Vdc
Base – Emitter Saturation Voltage ( $I_C = 10\text{ mAdc}$ , $I_B = 1.0\text{ mAdc}$ ) ( $I_C = 50\text{ mAdc}$ , $I_B = 5.0\text{ mAdc}$ ) ( $I_C = -10\text{ mAdc}$ , $I_B = -1.0\text{ mAdc}$ ) ( $I_C = -50\text{ mAdc}$ , $I_B = -5.0\text{ mAdc}$ )	MMBT3904WT1, SMMBT3904WT1  MMBT3906WT1, SMMBT3906WT1	$V_{BE(sat)}$	0.65 – –0.65 –	0.85 0.95 –0.85 –0.95 Vdc

2. Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ ; Duty Cycle  $\leq 2.0\%$ .

# MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP, SMMBT3906WT1G, PNP

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted) (Continued)



Characteristic	Symbol	Min	Max	Unit
<b>SMALL-SIGNAL CHARACTERISTICS</b>				
Current-Gain – Bandwidth Product ( $I_C = 10\text{ mAdc}$ , $V_{CE} = 20\text{ Vdc}$ , $f = 100\text{ MHz}$ ) ( $I_C = -10\text{ mAdc}$ , $V_{CE} = -20\text{ Vdc}$ , $f = 100\text{ MHz}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$f_T$	300 250	– – MHz
Output Capacitance ( $V_{CB} = 5.0\text{ Vdc}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ ) ( $V_{CB} = -5.0\text{ Vdc}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$C_{obo}$	– –	4.0 4.5 pF
Input Capacitance ( $V_{EB} = 0.5\text{ Vdc}$ , $I_C = 0$ , $f = 1.0\text{ MHz}$ ) ( $V_{EB} = -0.5\text{ Vdc}$ , $I_C = 0$ , $f = 1.0\text{ MHz}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$C_{ibo}$	– –	8.0 10.0 pF
Input Impedance ( $V_{CE} = 10\text{ Vdc}$ , $I_C = 1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -10\text{ Vdc}$ , $I_C = -1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$h_{ie}$	1.0 2.0	10 12 k $\Omega$
Voltage Feedback Ratio ( $V_{CE} = 10\text{ Vdc}$ , $I_C = 1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -10\text{ Vdc}$ , $I_C = -1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$h_{re}$	0.5 0.1	8.0 10 $\times 10^{-4}$
Small-Signal Current Gain ( $V_{CE} = 10\text{ Vdc}$ , $I_C = 1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -10\text{ Vdc}$ , $I_C = -1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$h_{fe}$	100 100	400 400 –
Output Admittance ( $V_{CE} = 10\text{ Vdc}$ , $I_C = 1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -10\text{ Vdc}$ , $I_C = -1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	$h_{oe}$	1.0 3.0	40 60 $\mu\text{mhos}$
Noise Figure ( $V_{CE} = 5.0\text{ Vdc}$ , $I_C = 100\text{ }\mu\text{Adc}$ , $R_S = 1.0\text{ k}\Omega$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -5.0\text{ Vdc}$ , $I_C = -100\text{ }\mu\text{Adc}$ , $R_S = 1.0\text{ k}\Omega$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1, SMMBT3904WT1 MMBT3906WT1, SMMBT3906WT1	NF	– –	5.0 4.0 dB

## SWITCHING CHARACTERISTICS

Characteristic	Condition	Symbol	Min	Max	Unit
Delay Time	( $V_{CC} = 3.0\text{ Vdc}$ , $V_{BE} = -0.5\text{ Vdc}$ ) MMBT3904WT1, SMMBT3904WT1 ( $V_{CC} = -3.0\text{ Vdc}$ , $V_{BE} = 0.5\text{ Vdc}$ ) MMBT3906WT1, SMMBT3906WT1	$t_d$	– –	35 35	ns
Rise Time	( $I_C = 10\text{ mAdc}$ , $I_{B1} = 1.0\text{ mAdc}$ ) MMBT3904WT1, SMMBT3904WT1 ( $I_C = -10\text{ mAdc}$ , $I_{B1} = -1.0\text{ mAdc}$ ) MMBT3906WT1, SMMBT3906WT1	$t_r$	– –	35 35	ns
Storage Time	( $V_{CC} = 3.0\text{ Vdc}$ , $I_C = 10\text{ mAdc}$ ) MMBT3904WT1, SMMBT3904WT1 ( $V_{CC} = -3.0\text{ Vdc}$ , $I_C = -10\text{ mAdc}$ ) MMBT3906WT1, SMMBT3906WT1	$t_s$	– –	200 225	ns
Fall Time	( $I_{B1} = I_{B2} = 1.0\text{ mAdc}$ ) MMBT3904WT1, SMMBT3904WT1 ( $I_{B1} = I_{B2} = -1.0\text{ mAdc}$ ) MMBT3906WT1, SMMBT3906WT1	$t_f$	– –	50 75	ns

**MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP,  
SMMBT3906WT1G, PNP**

**MMBT3904WT1, SMMBT3904WT1**

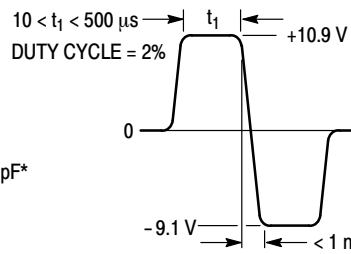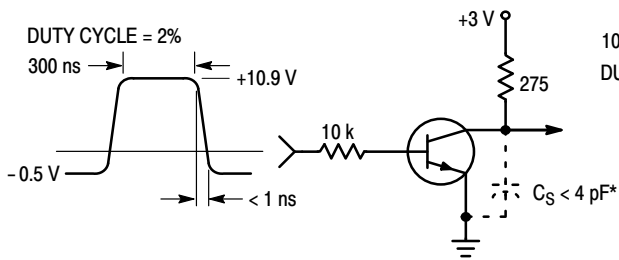

\* Total shunt capacitance of test jig and connectors

**Figure 1. Delay and Rise Time  
Equivalent Test Circuit**

**Figure 2. Storage and Fall Time  
Equivalent Test Circuit**

MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP, SMMBT3906WT1G, PNP

MMBT3904WT1, SMMBT3904WT1

TYPICAL TRANSIENT CHARACTERISTICS

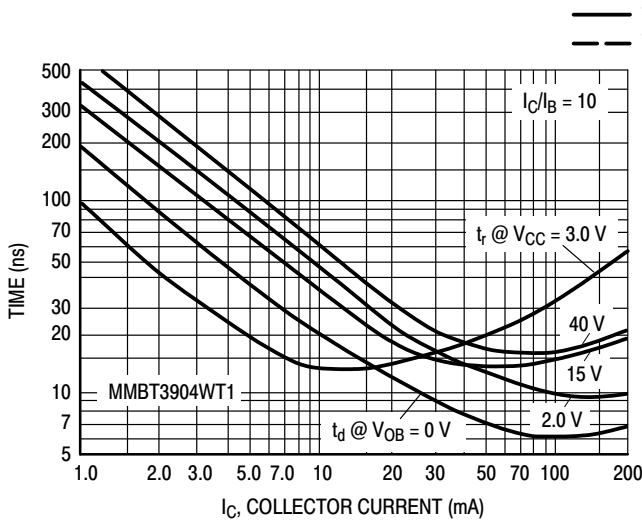


Figure 3. Turn-On Time

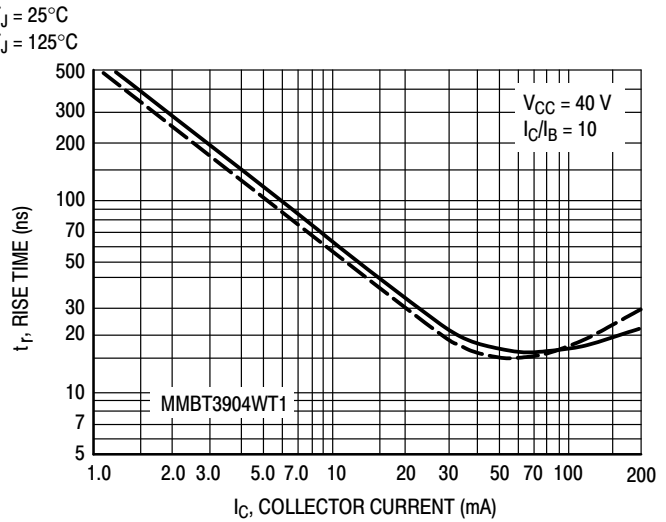


Figure 4. Rise Time

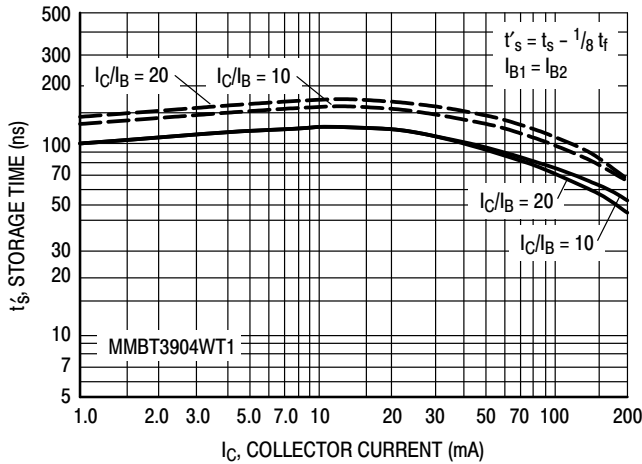


Figure 5. Storage Time

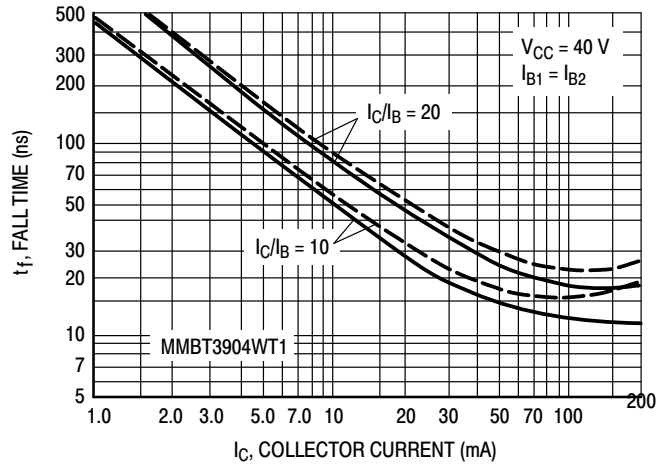


Figure 6. Fall Time

TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE VARIATIONS

( $V_{CE} = 5.0$  VDC,  $T_A = 25^\circ\text{C}$ , BANDWIDTH = 1.0 HZ)

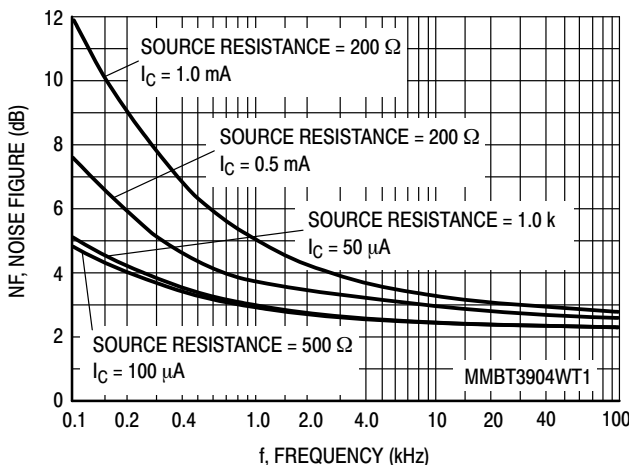


Figure 7. Noise Figure

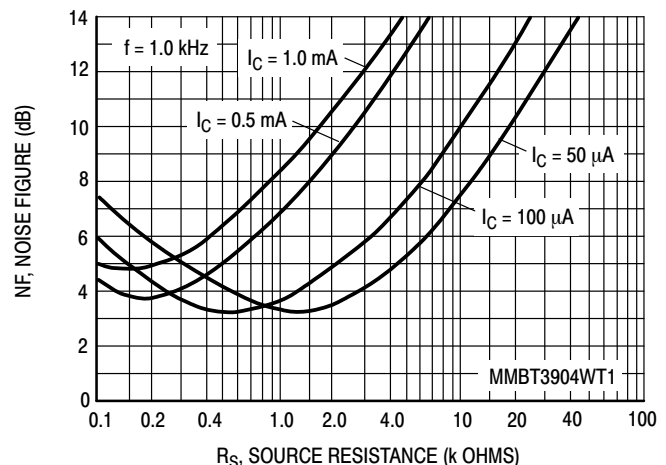



Figure 8. Noise Figure

**MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP, SMMBT3906WT1G, PNP**


**MMBT3904WT1, SMMBT3904WT1**

**H PARAMETERS**


( $V_{CE} = 10 \text{ VDC}$ ,  $F = 1.0 \text{ KHZ}$ ,  $T_A = 25^\circ\text{C}$ )

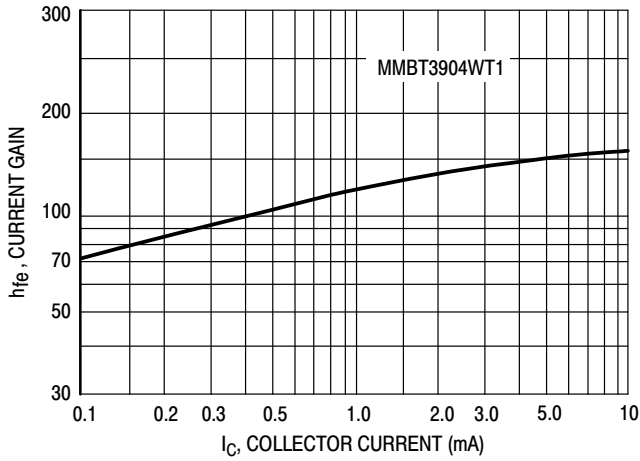


**Figure 9. Current Gain**

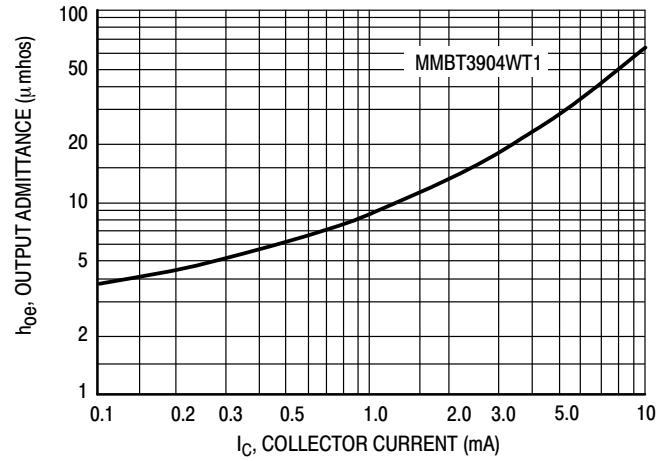

**Figure 10. Output Admittance**

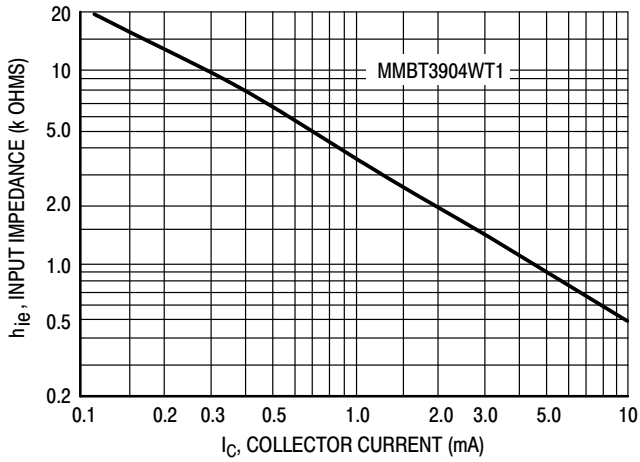


**Figure 11. Input Impedance**

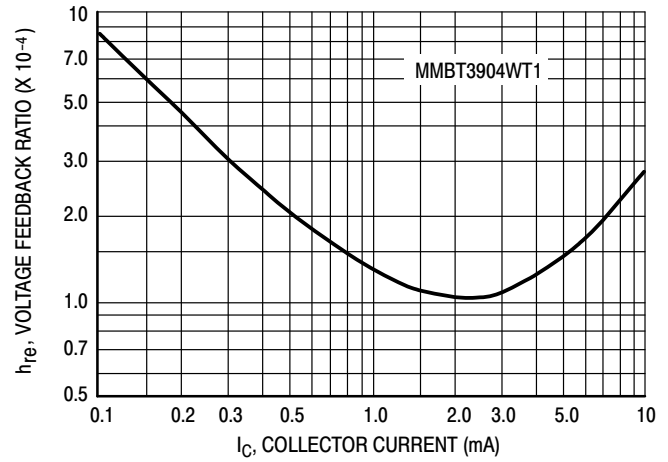

**Figure 12. Voltage Feedback Ratio**

**TYPICAL STATIC CHARACTERISTICS**

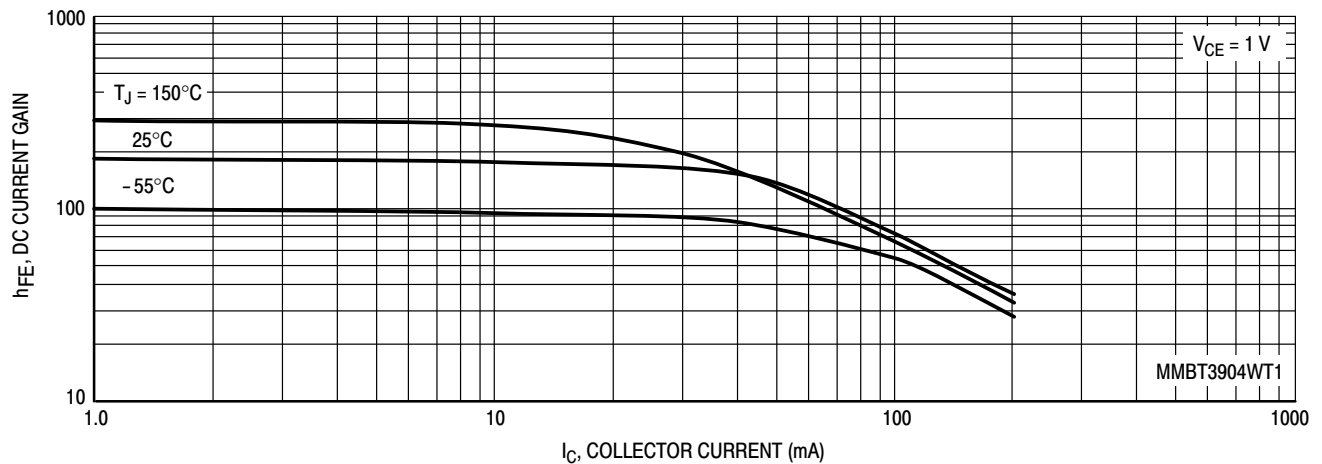

**Figure 13. DC Current Gain**

MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP,  
SMMBT3906WT1G, PNP

MMBT3904WT1, SMMBT3904WT1

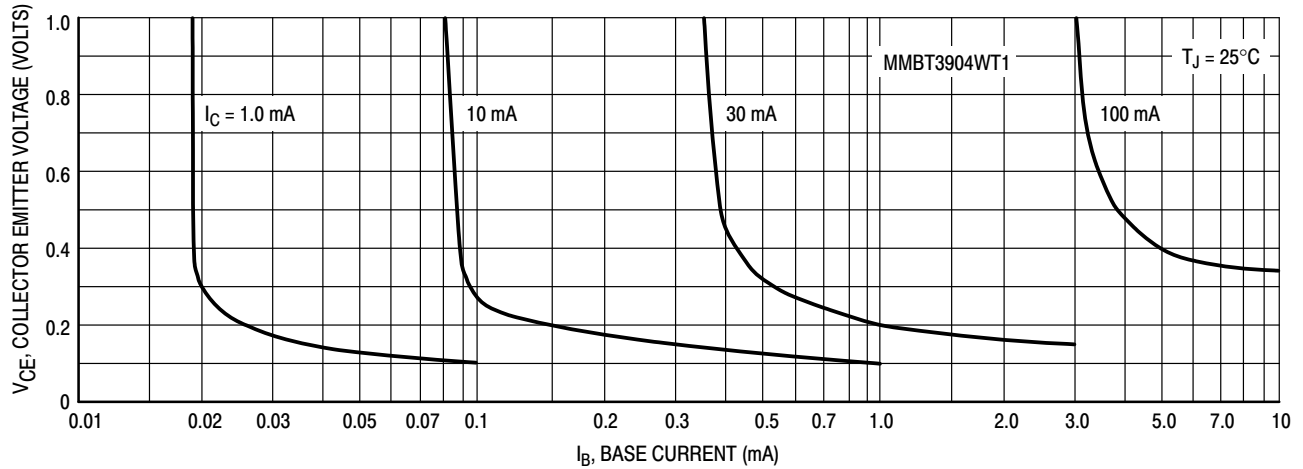


Figure 14. Collector Saturation Region

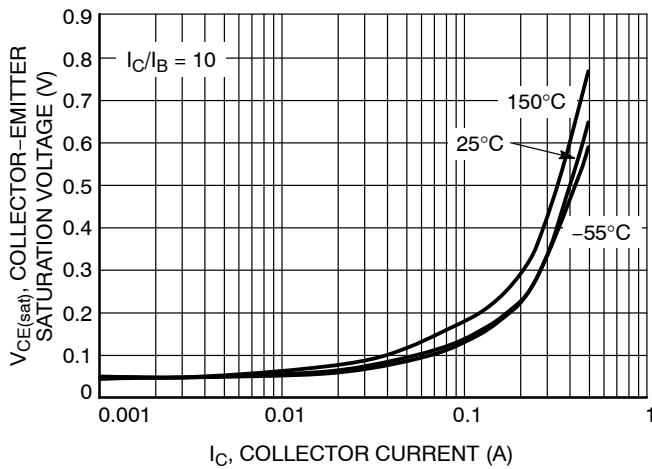


Figure 15. Collector-Emitter Saturation Voltage vs. Collector Current

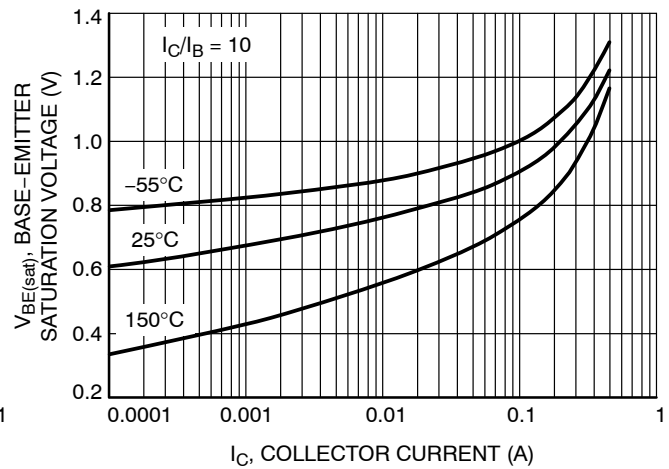


Figure 16. Base-Emitter Saturation Voltage vs. Collector Current


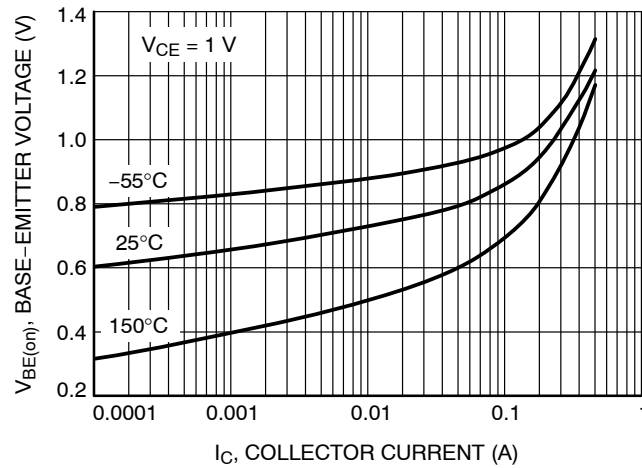



Figure 17. Base-Emitter Voltage vs. Collector Current

**MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP, SMMBT3906WT1G, PNP**


**MMBT3904WT1, SMMBT3904WT1**

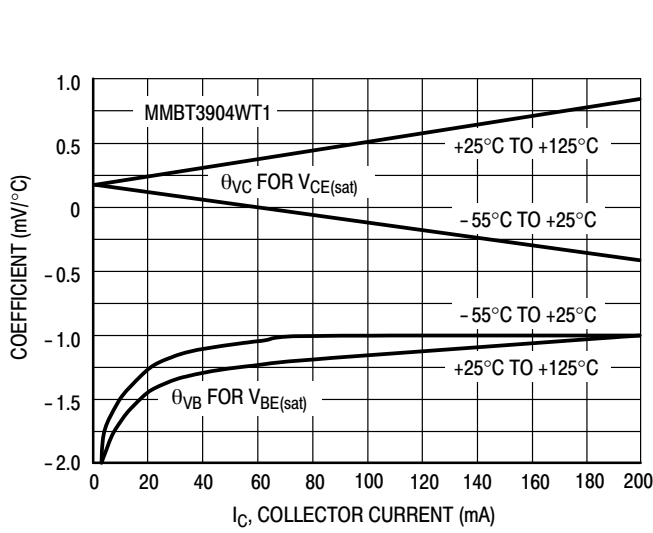


**Figure 18. Temperature Coefficients**

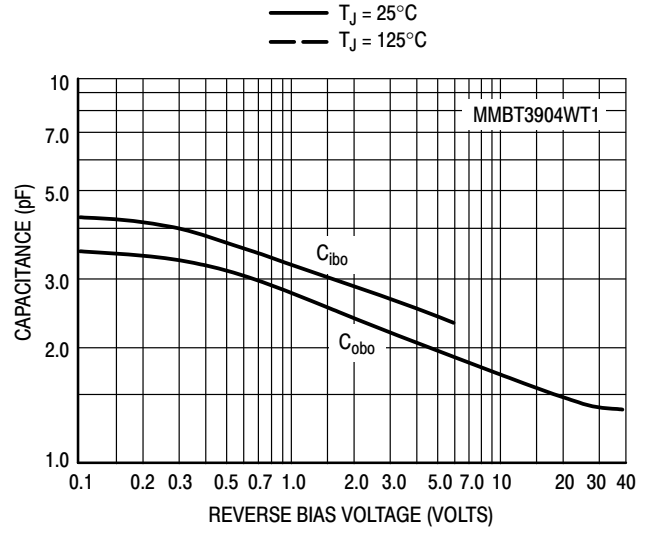

**Figure 19. Capacitance**

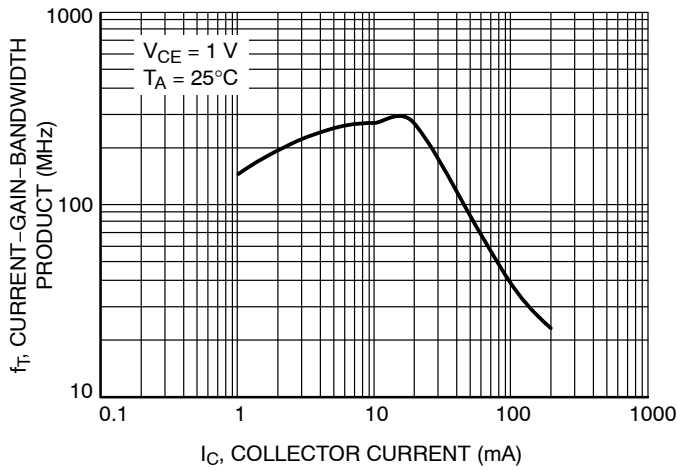

**Figure 20. Current Gain Bandwidth Product vs. Collector Current**

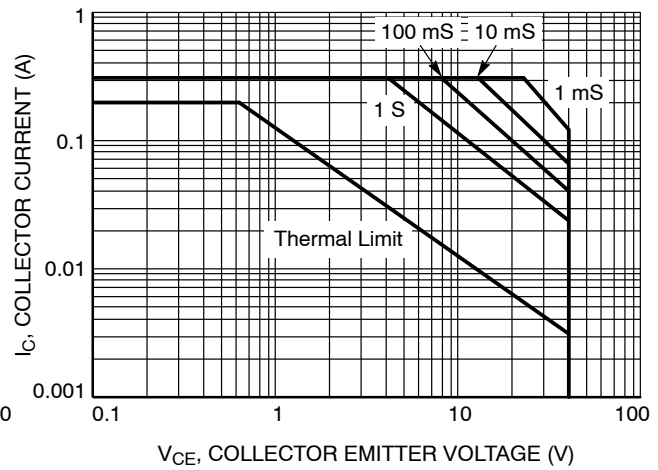


**Figure 21. Safe Operating Area**




**MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP, SMMBT3906WT1G, PNP**

**MMBT3906WT1, SMMBT3906WT1**

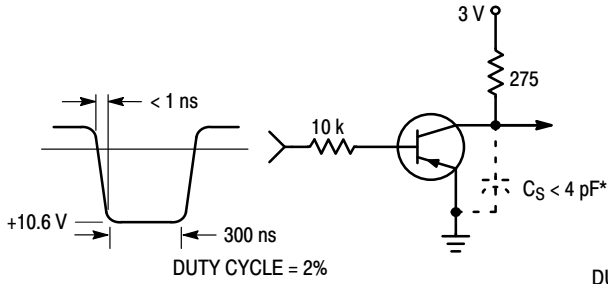


**Figure 22. Delay and Rise Time Equivalent Test Circuit**

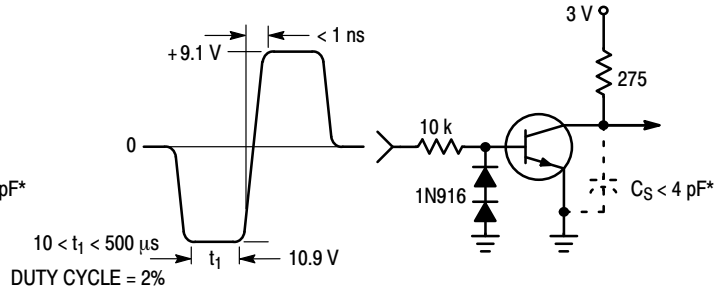


**Figure 23. Storage and Fall Time Equivalent Test Circuit**

\* Total shunt capacitance of test jig and connectors

**TYPICAL TRANSIENT CHARACTERISTICS**

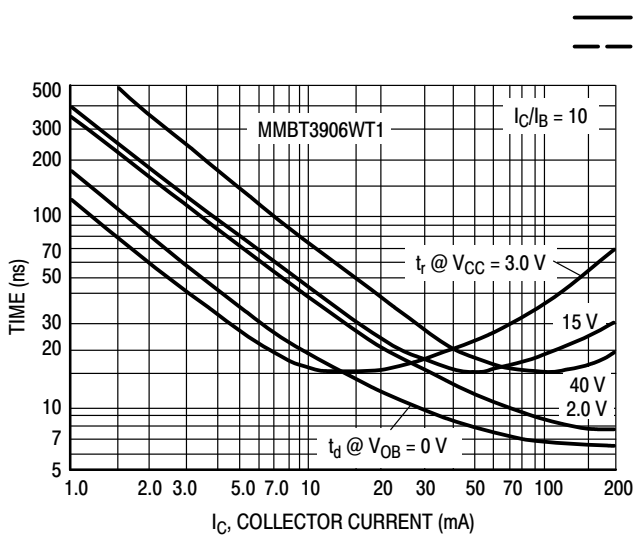


**Figure 24. Turn-On Time**

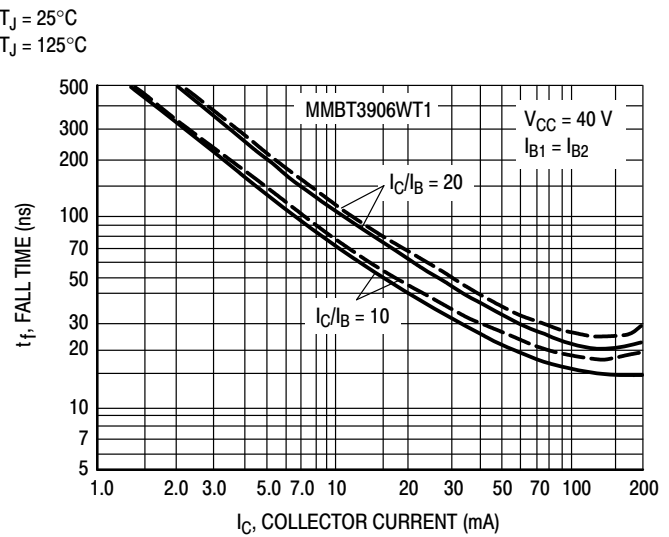


**Figure 25. Fall Time**

**TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE VARIATIONS**

( $V_{CE} = -5.0$  VDC,  $T_A = 25^\circ\text{C}$ , BANDWIDTH = 1.0 HZ)

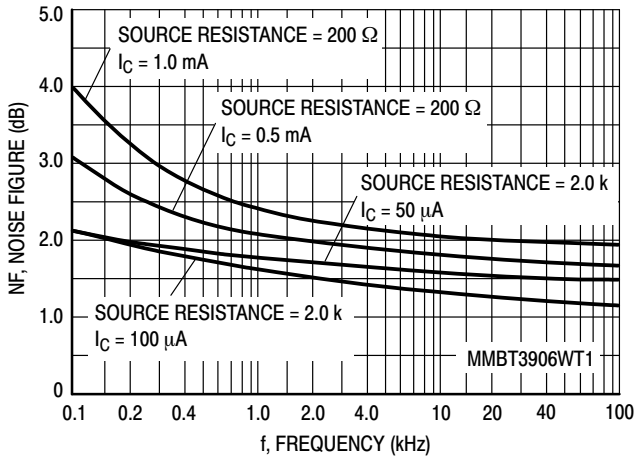

**Figure 26.**

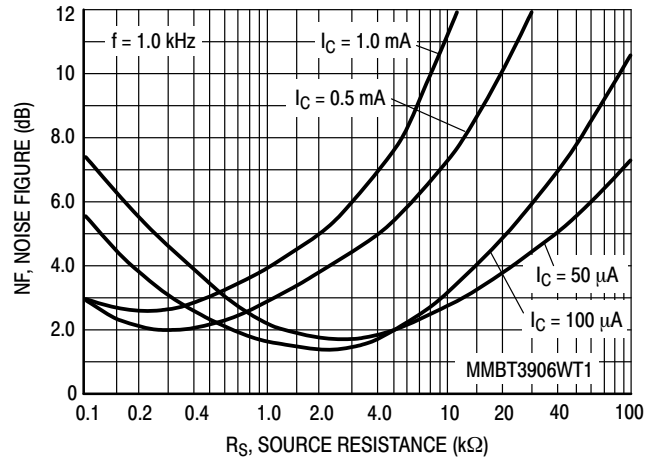


**Figure 27.**

**MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP, SMMBT3906WT1G, PNP**


**MMBT3906WT1, SMMBT3906WT1**

**H PARAMETERS**


( $V_{CE} = -10$  VDC,  $F = 1.0$  KHZ,  $T_A = 25^\circ\text{C}$ )

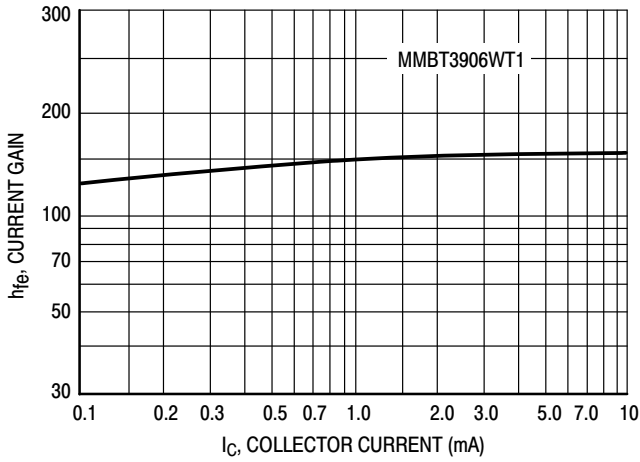


**Figure 28. Current Gain**

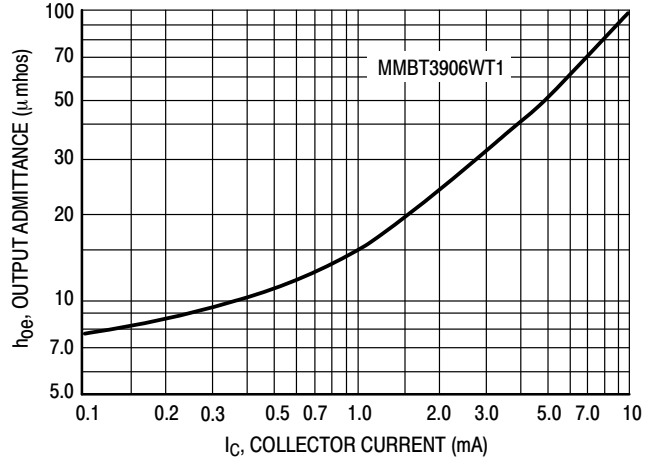

**Figure 29. Output Admittance**

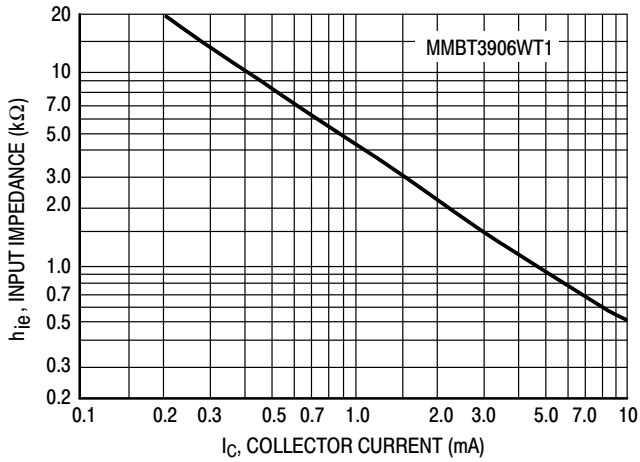


**Figure 30. Input Impedance**

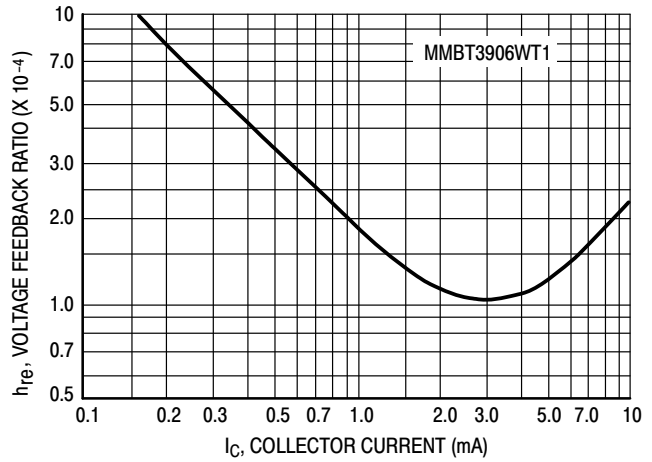

**Figure 31. Voltage Feedback Ratio**

**STATIC CHARACTERISTICS**

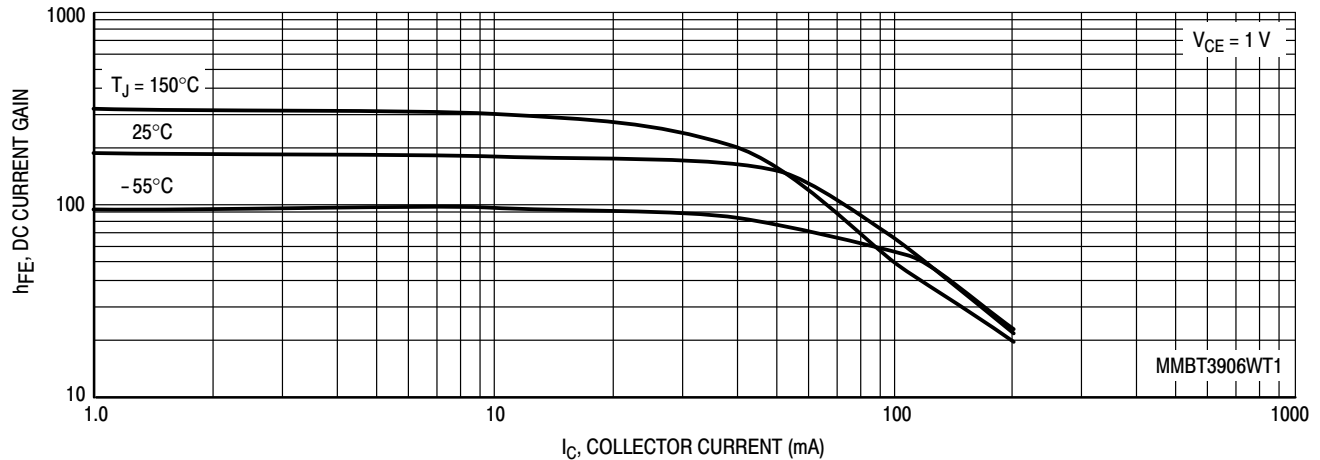

**Figure 32. DC Current Gain**

MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP,  
SMMBT3906WT1G, PNP

MMBT3906WT1, SMMBT3906WT1

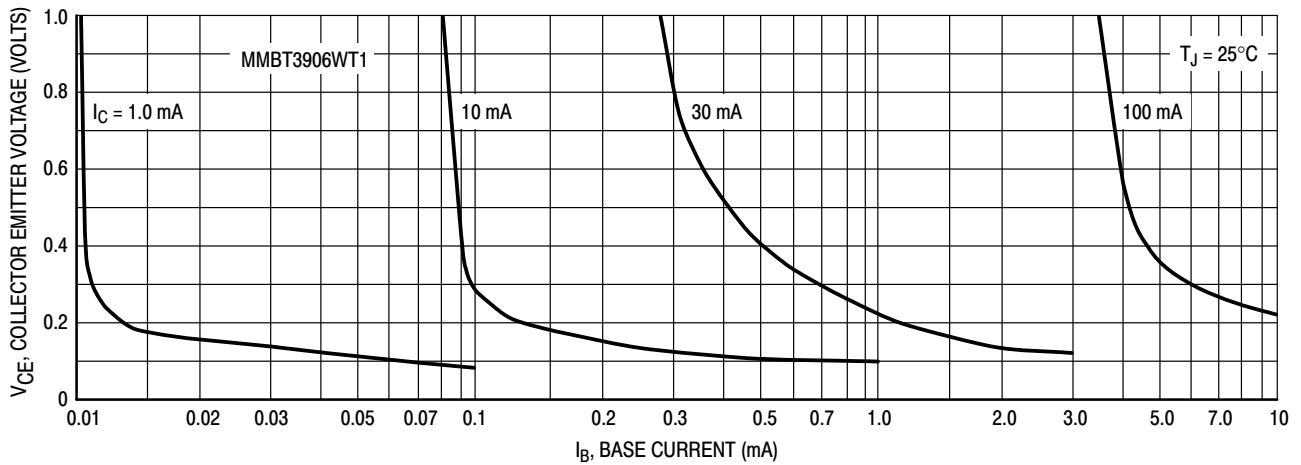


Figure 33. Collector Saturation Region

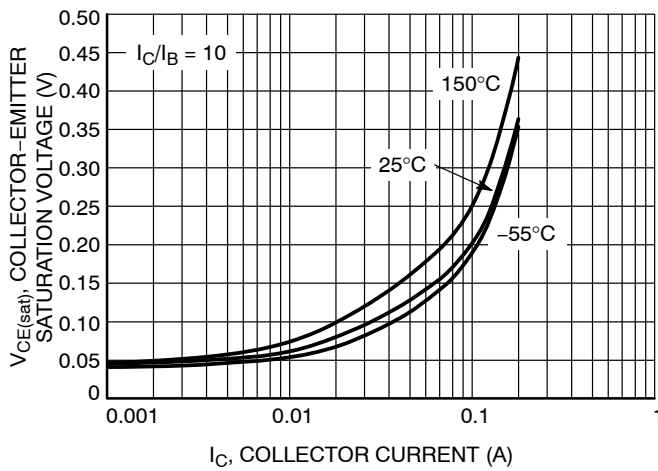


Figure 34. Collector Emitter Saturation Voltage vs. Collector Current

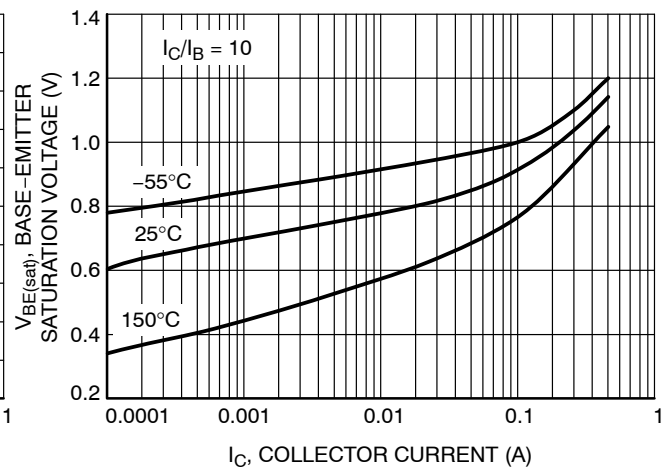


Figure 35. Base Emitter Saturation Voltage vs. Collector Current

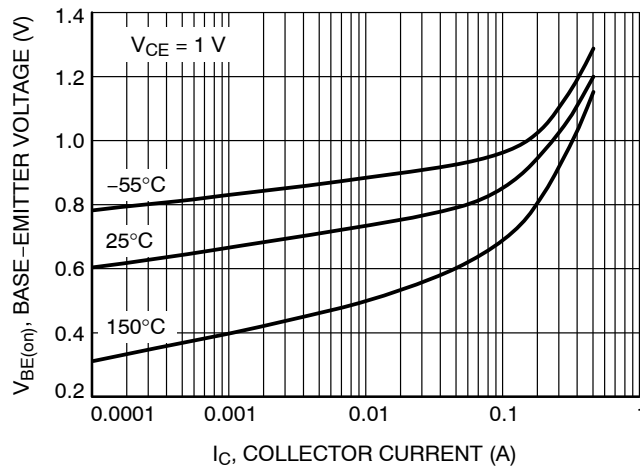


Figure 36. Base Emitter Voltage vs. Collector Current

MMBT3904WT1G, NPN, SMMBT3904WT1G, NPN, MMBT3906WT1G, PNP,  
SMMBT3906WT1G, PNP

MMBT3906WT1, SMMBT3906WT1

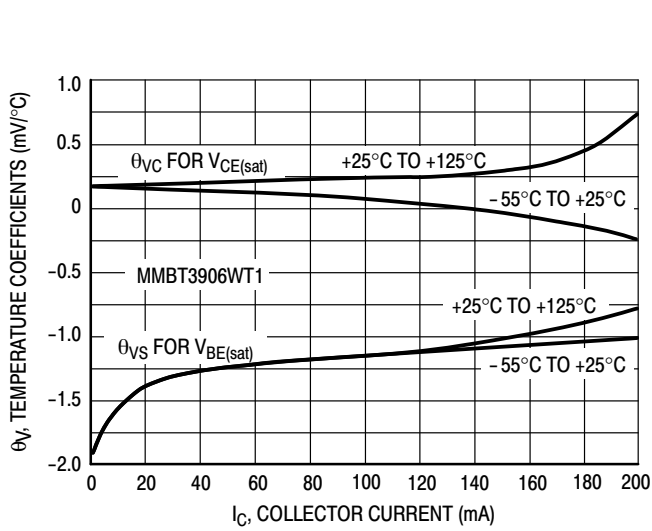


Figure 37. Temperature Coefficients

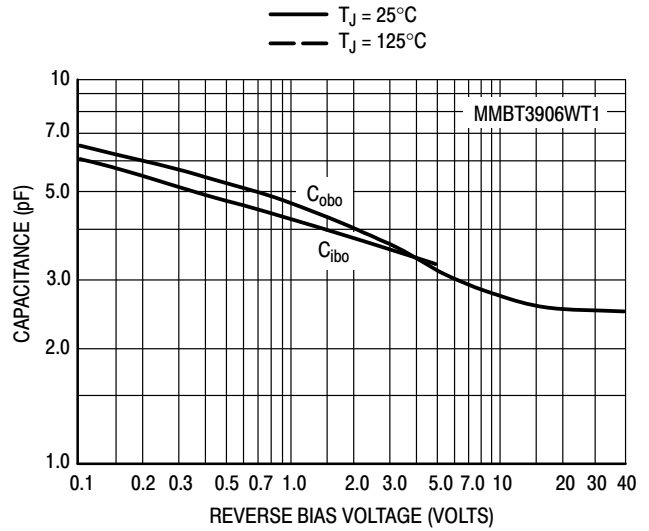


Figure 38. Capacitance

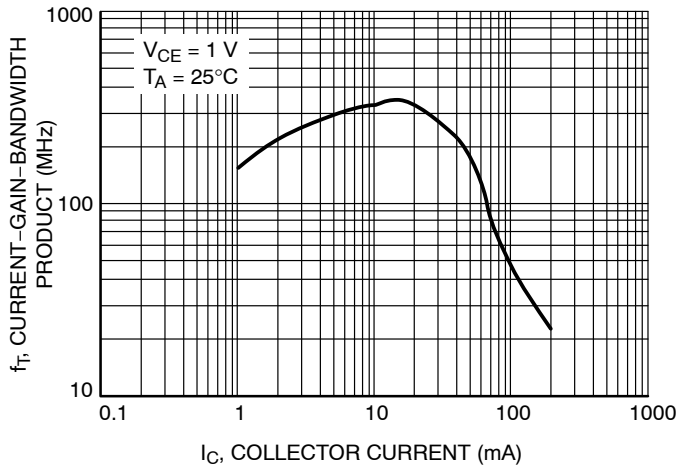


Figure 39. Current Gain Bandwidth Product vs. Collector Current


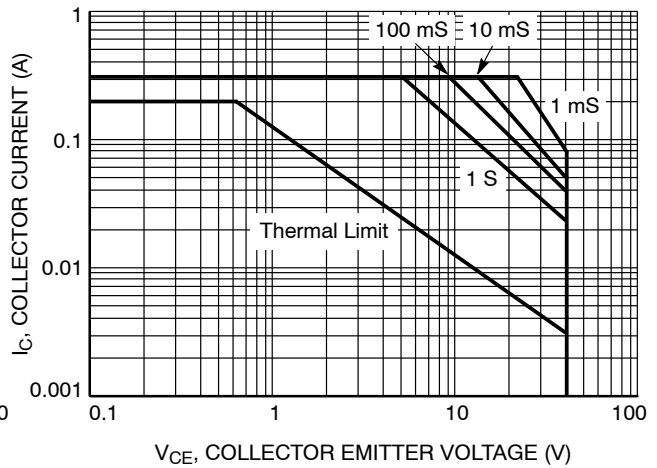


Figure 40. Safe Operating Area

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



SCALE 4:1

## SC-70 (SOT-323) CASE 419 ISSUE R

DATE 11 OCT 2022



NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH


DIM	MILLIMETERS			INCHES		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.80	0.90	1.00	0.032	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2	0.70 REF			0.028 BSC		
b	0.30	0.35	0.40	0.012	0.014	0.016
c	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.00	2.20	0.071	0.080	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
e	1.20	1.30	1.40	0.047	0.051	0.055
e1	0.65 BSC			0.026 BSC		
L	0.20	0.38	0.56	0.008	0.015	0.022
H <sub>E</sub>	2.00	2.10	2.40	0.079	0.083	0.095

### GENERIC MARKING DIAGRAM



- XX = Specific Device Code
- M = Date Code
- = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

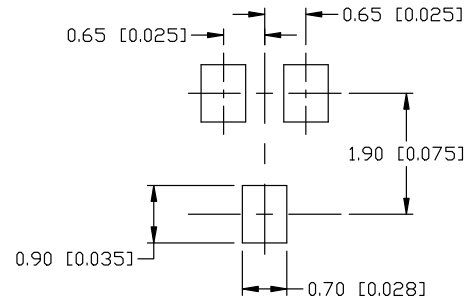

\* For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERM/D.

### SOLDERING FOOTPRINT

- |   |   |   |  |   |
|---|---|---|--|---|
| STYLE 1:<br>CANCELLED                                 | STYLE 2:<br>PIN 1. ANODE<br>2. N.C.<br>3. CATHODE     | STYLE 3:<br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR | STYLE 4:<br>PIN 1. CATHODE<br>2. CATHODE<br>3. ANODE       | STYLE 5:<br>PIN 1. ANODE<br>2. ANODE<br>3. CATHODE          |
| STYLE 6:<br>PIN 1. EMITTER<br>2. BASE<br>3. COLLECTOR | STYLE 7:<br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR | STYLE 8:<br>PIN 1. GATE<br>2. SOURCE<br>3. DRAIN      | STYLE 9:<br>PIN 1. ANODE<br>2. CATHODE<br>3. CATHODE-ANODE | STYLE 10:<br>PIN 1. CATHODE<br>2. ANODE<br>3. ANODE-CATHODE |
|   |   |   |  | STYLE 11:<br>PIN 1. CATHODE<br>2. CATHODE<br>3. CATHODE     |

<b>DOCUMENT NUMBER:</b>	<b>98ASB42819B</b>	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
<b>DESCRIPTION:</b>	<b>SC-70 (SOT-323)</b>	<b>PAGE 1 OF 1</b>

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**onsemi Website:** [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

**North American Technical Support:**

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

**Europe, Middle East and Africa Technical Support:**

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative