

16-Bit buffer/line driver; 3-state; inverting**74ALVC16240****FEATURES**

- Wide supply voltage range of 1.2 V to 3.6 V
- In accordance with JEDEC standard no.8-1A
- CMOS low power consumption
- Multibyte™ flow-through standard pin-out architecture
- Low inductance multiple power and ground pins for minimum noise and ground bounce
- Direct interface with TTL levels
- All data inputs have bushold
- Output drive capability 50 Ω transmission lines @ 85 °C

DESCRIPTION

The 74ALVC16240 is a high-performance, low-power, low-voltage, Si-gate CMOS device superior to most advanced CMOS compatible TTL families.

The 74ALVC16240 is a 16-bit inverting buffer/line driver with 3-state outputs. The 3-state outputs are controlled by the output enable inputs $1\overline{OE}$ and $2\overline{OE}$. A HIGH on $n\overline{OE}$ causes the outputs to assume a high impedance OFF-state. The "16240" is identical to the "16244" but has inverting outputs.

FUNCTION TABLE

INPUTS		OUTPUT
$n\overline{OE}$	nA_n	nY_n
L	L	H
L	H	L
H	X	Z

H = HIGH voltage level

L = LOW voltage level

X = don't care

Z = high impedance OFF-state

QUICK REFERENCE DATA

GND = 0 V; $T_{amb} = 25\text{ °C}$; $t_r = t_f = 2.5\text{ ns}$

SYMBOL	PARAMETER	CONDITIONS	TYPICAL	UNIT
t_{PHL}/t_{PLH}	propagation delay $1A_n$ to $1Y_n$; $2A_n$ to $2Y_n$	$C_L = 50\text{ pF}$ $V_{CC} = 3.3\text{ V}$	2.1	ns
C_i	input capacitance		3.0	pF
C_{PD}	power dissipation capacitance per buffer	notes 1 and 2	30	pF

Notes to the quick reference data

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW):
 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \Sigma (C_L \times V_{CC}^2 \times f_o)$ where:
 f_i = input frequency in MHz; C_L = output load capacity in pF;
 f_o = output frequency in MHz; V_{CC} = supply voltage in V;
 $\Sigma (C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.
2. The condition is $V_i = \text{GND to } V_{CC}$.

ORDERING INFORMATION





TYPE NUMBER	PACKAGES			
	PINS	PACKAGE	MATERIAL	CODE
74ALVC16240DL	48	SSOP48	plastic	SSOP48/SOT370
74ALVC16240DGG	48	TSSOP48	plastic	TSSOP48/SOT362

PINNING

PIN NO.	SYMBOL	NAME AND FUNCTION
1	$1\overline{OE}$	'1' output enable input (active LOW)
2, 3, 5, 6	$1Y_0$ to $1Y_3$	'1Y' data outputs
4, 10, 15, 21, 28, 34, 39, 45	GND	ground (0 V)
7, 18, 31, 42	V_{CC}	positive supply voltage
8, 9, 11, 12	$2Y_0$ to $2Y_3$	'2Y' data outputs
13, 14, 16, 17	$3Y_0$ to $3Y_3$	'3Y' data outputs
19, 20, 22, 23	$4Y_0$ to $4Y_3$	'4Y' data outputs
24	$4\overline{OE}$	'4' output enable input (active LOW)
25	$3\overline{OE}$	'3' output enable input (active LOW)
30, 29, 27, 26	$4A_0$ to $4A_3$	'4A' data inputs
36, 35, 33, 32	$3A_0$ to $3A_3$	'3A' data inputs
41, 40, 38, 37	$2A_0$ to $2A_3$	'2A' data inputs
47, 46, 44, 43	$1A_0$ to $1A_3$	'1A' data inputs
48	$2\overline{OE}$	'2' output enable input (active LOW)

16-Bit buffer/line driver; 3-state; inverting

74ALVC16240

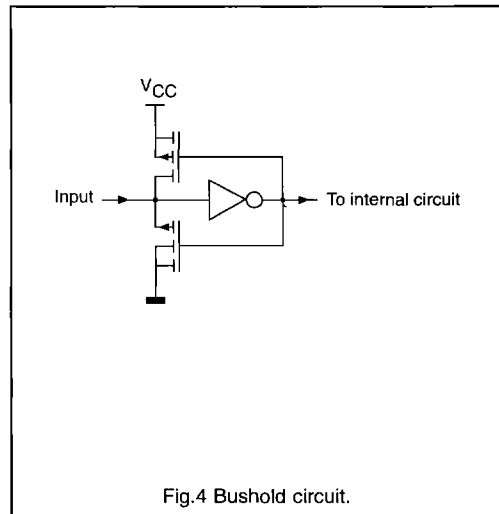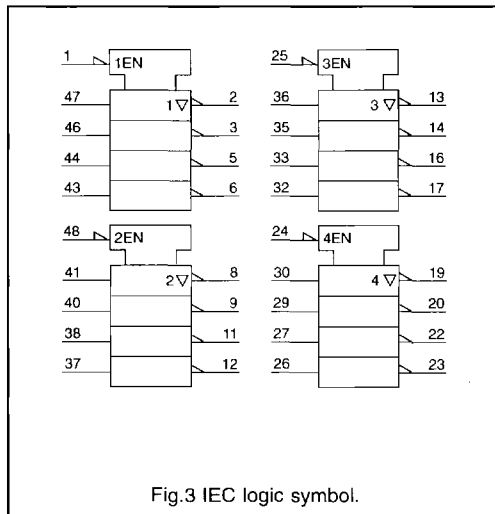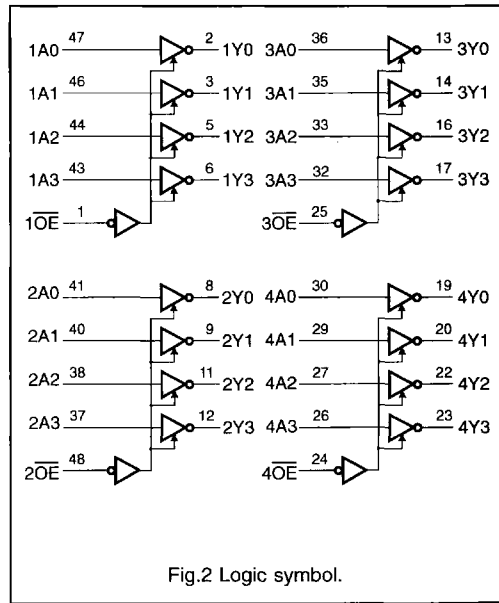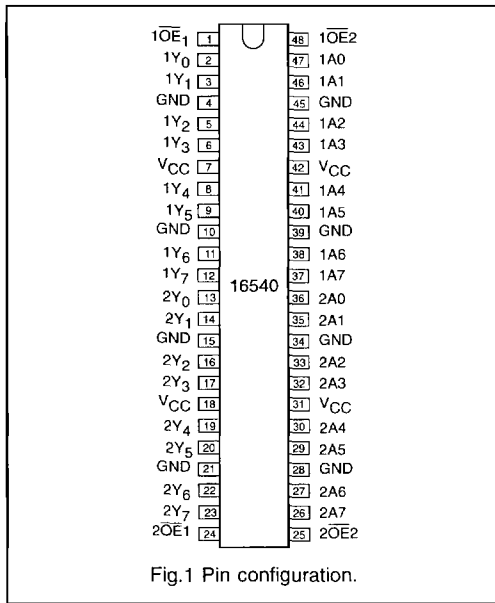

16-Bit buffer/line driver; 3-state; inverting

74ALVC16240

DC CHARACTERISTICS FOR 74ALVC16240

For the DC characteristics see chapter "ALVC16 family characteristics", section "Family specifications".

AC CHARACTERISTICS FOR 74ALVC16240GND = 0 V; $t_r = t_f = 2.5$ ns; $C_L = 50$ pF




SYMBOL	PARAMETER	T_{amb} (°C)			UNIT	TEST CONDITIONS	
		-40 to +85				V_{CC} (V)	WAVEFORMS
		MIN.	TYP.	MAX.			
t_{PHL}/t_{PLH}	propagation delay	-	-	16.0	ns	1.2	Fig. 5
	$1A_n$ to $1Y_n$;	-	-	4.5		2.7	
	$2A_n$ to $2Y_n$	-	2.1*	3.9		3.0 to 3.6	
t_{PZH}/t_{PZL}	3-state output enable time	-	-	-	ns	1.2	Fig. 6
	$1\overline{OE}$ to $1Y_n$;	-	-	5.5		2.7	
	$2\overline{OE}$ to $2Y_n$	-	-	4.7		3.0 to 3.6	
t_{PHZ}/t_{PLZ}	3-state output disable time	-	-	-	ns	1.2	Fig. 6
	$1\overline{OE}$ to $1Y_n$;	-	-	5.5		2.7	
	$2\overline{OE}$ to $2Y_n$	-	-	5.0		3.0 to 3.6	

Notes: All typical values are measured at $T_{amb} = 25$ °C.
 * Typical values are measured at $V_{CC} = 3.3$ V.

16-Bit buffer/line driver; 3-state; inverting

74ALVC16240

AC WAVEFORMS

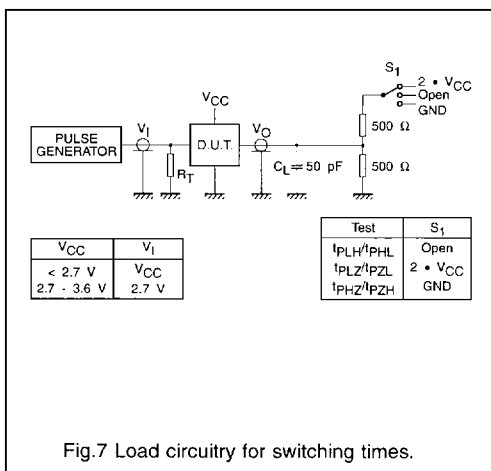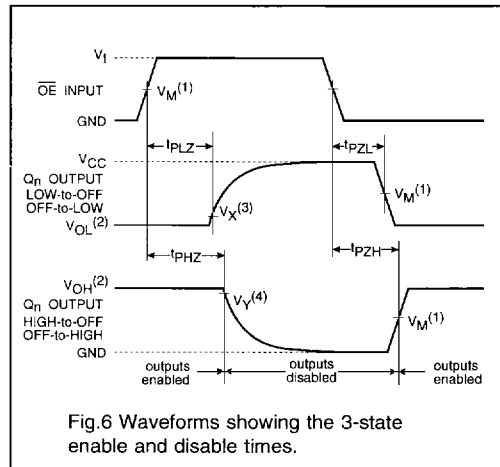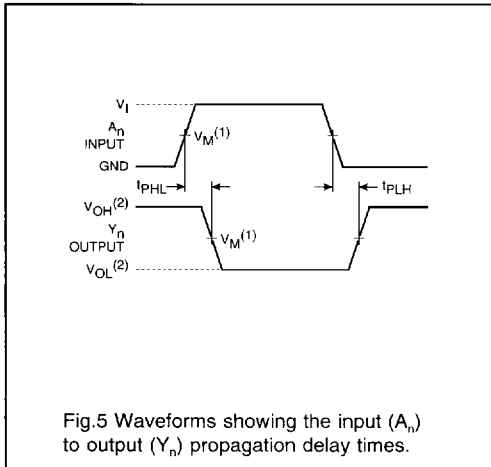

- Notes:**
- (1) $V_M = 1.5 \text{ V}$ at $V_{CC} \geq 2.7 \text{ V}$
 $V_M = 0.5 \cdot V_{CC}$ at $V_{CC} < 2.7 \text{ V}$
 - (2) V_{OL} and V_{OH} are the typical output voltage drop that occur with the output load.
 - (3) $V_X = V_{OL} + 0.3 \text{ V}$ at $V_{CC} \geq 2.7 \text{ V}$
 $V_X = V_{OL} + 0.1 \cdot V_{CC}$ at $V_{CC} < 2.7 \text{ V}$
 - (4) $V_Y = V_{OH} - 0.3 \text{ V}$ at $V_{CC} \geq 2.7 \text{ V}$
 $V_Y = V_{OH} - 0.1 \cdot V_{CC}$ at $V_{CC} < 2.7 \text{ V}$