

DATA SHEET

74LV14

Hex inverting Schmitt-trigger

Product specification

1997 Feb 03

IC24 Data Handbook

Hex inverting Schmitt-trigger

74LV14

FEATURES

- Wide operating voltage: 1.0 to 5.5 V
- Optimized for Low Voltage applications: 1.0 to 3.6 V
- Accepts TTL input levels between $V_{CC} = 2.7$ V and $V_{CC} = 3.6$ V
- Typical V_{OLP} (output ground bounce) < 0.8 V at $V_{CC} = 3.3$ V, $T_{amb} = 25^\circ\text{C}$.
- Typical V_{OHV} (output V_{OH} undershoot) > 2 V at $V_{CC} = 3.3$ V, $T_{amb} = 25^\circ\text{C}$.
- Output capability: standard
- I_{CC} category: SSI

QUICK REFERENCE DATA

 $GND = 0$ V; $T_{amb} = 25^\circ\text{C}$; $t_r = t_f \leq 2.5$ ns

SYMBOL	PARAMETER	CONDITIONS	TYPICAL	UNIT
t_{PHL}/t_{PLH}	Propagation delay nA to nY	$C_L = 15$ pF; $V_{CC} = 3.3$ V	13	ns
C_I	Input capacitance		3.5	pF
C_{PD}	Power dissipation capacitance per gate	See Notes 1 and 2	15	pF

NOTES:


1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW)

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o)$$
 where:
 f_i = input frequency in MHz; C_L = output load capacity in pF;
 f_o = output frequency in MHz; V_{CC} = supply voltage in V;
 $\sum (C_L \times V_{CC}^2 \times f_o)$ = sum of the outputs.
2. The condition is $V_I = GND$ to V_{CC} .


ORDERING INFORMATION

PACKAGES	TEMPERATURE RANGE	OUTSIDE NORTH AMERICA	NORTH AMERICA	PKG. DWG. #
14-Pin Plastic DIL	-40°C to +125°C	74LV14 N	74LV14 N	SOT27-1
14-Pin Plastic SO	-40°C to +125°C	74LV14 D	74LV14 D	SOT108-1
14-Pin Plastic SSOP Type II	-40°C to +125°C	74LV14 DB	74LV14 DB	SOT337-1
14-Pin Plastic TSSOP Type I	-40°C to +125°C	74LV14 PW	74LV14PW DH	SOT402-1

PIN CONFIGURATION

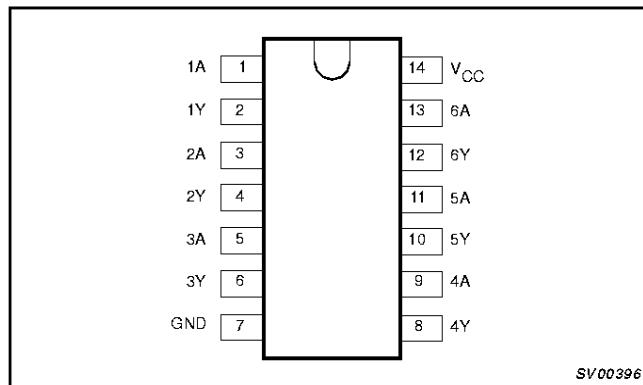

LOGIC SYMBOL (IEEE/IEC)

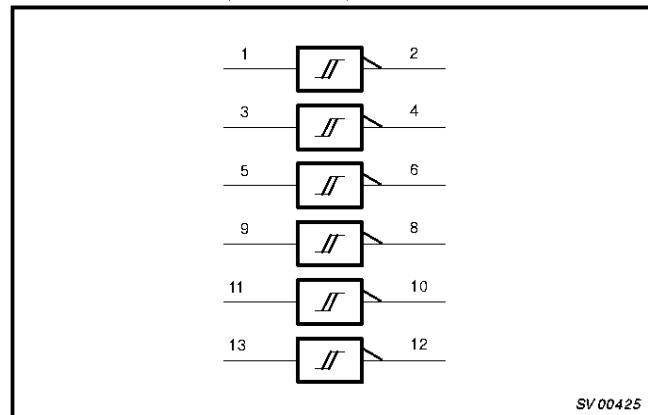


Hex inverting Schmitt-trigger

74LV14


PIN DESCRIPTION

PIN NUMBER	SYMBOL	NAME AND FUNCTION
1, 3, 5, 9, 11, 13	1A - 6A	Data inputs
2, 4, 6, 8, 10, 12	1Y - 6Y	Data outputs
7	GND	Ground (0 V)
14	V _{CC}	Positive supply voltage

LOGIC DIAGRAM

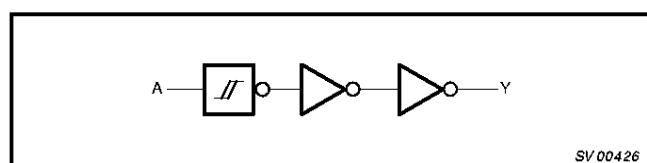

LOGIC SYMBOL

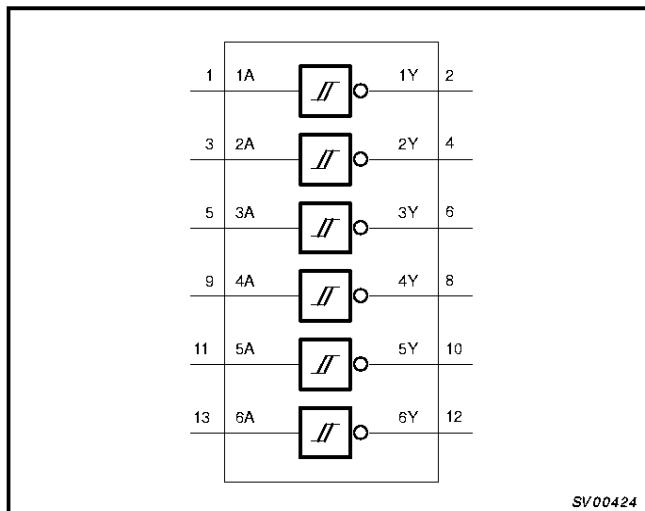

FUNCTION TABLE

INPUT	OUTPUT
nA	nY
L	H
H	L

NOTES:

H = HIGH voltage level
 L = LOW voltage level

ABSOLUTE MAXIMUM RATINGS^{1, 2}

In accordance with the Absolute Maximum Rating System (IEC 134).

Voltages are referenced to GND (ground = 0V).

SYMBOL	PARAMETER	CONDITIONS	RATING	UNIT
V _{CC}	DC supply voltage		-0.5 to +7.0	V
±I _{IK}	DC input diode current	V _I < -0.5 or V _I > V _{CC} + 0.5V	20	mA
±I _{OK}	DC output diode current	V _O < -0.5 or V _O > V _{CC} + 0.5V	50	mA
±I _O	DC output source or sink current – standard outputs – bus driver outputs	-0.5V < V _O < V _{CC} + 0.5V	25 35	mA
±I _{GND} , ±I _{CC}	DC V _{CC} or GND current for types with – standard outputs – bus driver outputs		50 70	mA
T _{stg}	Storage temperature range		-65 to +150	°C
P _{TOT}	Power dissipation per package – plastic DIL – plastic mini-pack (SO) – plastic shrink mini-pack (SSOP and TSSOP)	for temperature range: -40 to +125°C above +70°C derate linearly with 12 mW/K above +70°C derate linearly with 8 mW/K above +60°C derate linearly with 5.5 mW/K	750 500 400	mW

NOTES:

1. Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

Hex inverting Schmitt-trigger

74LV14

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V_{CC}	DC supply voltage	See Note ¹	1.0	3.3	5.5	V
V_I	Input voltage		0	—	V_{CC}	V
V_O	Output voltage		0	—	V_{CC}	V
T_{amb}	Operating ambient temperature range in free air	See DC and AC characteristics per device	-40 -40		+85 +125	°C
t_r, t_f	Input rise and fall times except for Schmitt-trigger inputs	$V_{CC} = 1.0V$ to $2.0V$ $V_{CC} = 2.0V$ to $2.7V$ $V_{CC} = 2.7V$ to $3.6V$ $V_{CC} = 3.6V$ to $5.5V$	— — — —	— — — —	500 200 100 50	ns/V

NOTE:

1. The LV is guaranteed to function down to $V_{CC} = 1.0V$ (input levels GND or V_{CC}); DC characteristics are guaranteed from $V_{CC} = 1.2V$ to $V_{CC} = 5.5V$.

DC ELECTRICAL CHARACTERISTICS

Over recommended operating conditions. Voltages are referenced to GND (ground = 0V).

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS					UNIT	
			-40°C to +85°C			-40°C to +125°C			
			MIN	TYP ¹	MAX	MIN	MAX		
V_{IH}	HIGH level Input voltage	$V_{CC} = 1.2V$	V_{CC}	0.6		V_{CC}		V	
		$V_{CC} = 2.0V$		1.4			1.4		
		$V_{CC} = 2.7$ to $3.6V$		2.0			2.0		
		$V_{CC} = 4.5$ to $5.5V$		$0.7*V_{CC}$			$0.7*V_{CC}$		
V_{IL}	LOW level Input voltage	$V_{CC} = 1.2V$		0.4	GND		GND	V	
		$V_{CC} = 2.0V$			0.6		0.6		
		$V_{CC} = 2.7$ to $3.6V$			0.8		0.8		
		$V_{CC} = 4.5$ to $5.5V$			$0.3*V_{CC}$		$0.3*V_{CC}$		
V_{OH}	HIGH level output voltage; all outputs	$V_{CC} = 1.2V$; $V_I = V_{IH}$ or V_{IL} ; $-I_O = 100\mu A$		1.2				V	
		$V_{CC} = 2.0V$; $V_I = V_{IH}$ or V_{IL} ; $-I_O = 100\mu A$	1.8	2.0		1.8			
		$V_{CC} = 2.7V$; $V_I = V_{IH}$ or V_{IL} ; $-I_O = 100\mu A$	2.5	2.7		2.5			
		$V_{CC} = 3.0V$; $V_I = V_{IH}$ or V_{IL} ; $-I_O = 100\mu A$	2.8	3.0		2.8			
		$V_{CC} = 4.5V$; $V_I = V_{IH}$ or V_{IL} ; $-I_O = 100\mu A$	4.3	4.5		4.3			
V_{OH}	HIGH level output voltage; STANDARD outputs	$V_{CC} = 3.0V$; $V_I = V_{IH}$ or V_{IL} ; $-I_O = 6mA$	2.40	2.82		2.20		V	
		$V_{CC} = 4.5V$; $V_I = V_{IH}$ or V_{IL} ; $-I_O = 12mA$	3.60	4.20		3.50			
V_{OH}	HIGH level output voltage; BUS driver outputs	$V_{CC} = 3.0V$; $V_I = V_{IH}$ or V_{IL} ; $-I_O = 8mA$	2.40	2.82		2.20		V	
		$V_{CC} = 4.5V$; $V_I = V_{IH}$ or V_{IL} ; $-I_O = 16mA$	3.60	4.20		3.50			
V_{OL}	LOW level output voltage; all outputs	$V_{CC} = 1.2V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = 100\mu A$		0				V	
		$V_{CC} = 2.0V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = 100\mu A$		0	0.2		0.2		
		$V_{CC} = 2.7V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = 100\mu A$		0	0.2		0.2		
		$V_{CC} = 3.0V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = 100\mu A$		0	0.2		0.2		
		$V_{CC} = 4.5V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = 100\mu A$		0	0.2		0.2		
V_{OL}	LOW level output voltage; STANDARD outputs	$V_{CC} = 3.0V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = 6mA$		0.25	0.40		0.50	V	
		$V_{CC} = 4.5V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = 12mA$		0.35	0.55		0.65		
V_{OL}	LOW level output voltage; BUS driver outputs	$V_{CC} = 3.0V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = 8mA$		0.20	0.40		0.50	V	
		$V_{CC} = 4.5V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = 16mA$		0.35	0.55		0.65		
I_I	Input leakage current	$V_{CC} = 5.5V$; $V_I = V_{CC}$ or GND			1.0		1.0	μA	
I_{OZ}	3-State output OFF-state current	$V_{CC} = 5.5V$; $V_I = V_{IH}$ or V_{IL} ; $V_O = V_{CC}$ or GND			5		10	μA	

Hex inverting Schmitt-trigger

74LV14

DC ELECTRICAL CHARACTERISTICS (Continued)

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS				UNIT
			-40°C to +85°C		-40°C to +125°C		
I_{CC}	Quiescent supply current; SSI	$V_{CC} = 5.5V; V_I = V_{CC} \text{ or GND}; I_O = 0$			20.0		40
	Quiescent supply current; flip-flops	$V_{CC} = 5.5V; V_I = V_{CC} \text{ or GND}; I_O = 0$			20.0		80
I_{CC}	Quiescent supply current; MSI	$V_{CC} = 5.5V; V_I = V_{CC} \text{ or GND}; I_O = 0$			20.0		160
	Quiescent supply current; LSI	$V_{CC} = 5.5V; V_I = V_{CC} \text{ or GND}; I_O = 0$			500		1000
ΔI_{CC}	Additional quiescent supply current	$V_{CC} = 2.7V \text{ to } 3.6V; V_I = V_{CC} - 0.6V$			500		850

NOTE:

1. All typical values are measured at $T_{amb} = 25^\circ\text{C}$.

TRANSFER CHARACTERISTICS

Voltages are referenced to GND (ground = 0 V)

SYMBOL	PARAMETER	T _{amb} (°C)					UNIT	TEST CONDITIONS		
		-40 TO +85			-40 TO +125			WAVEFORMS		
		MIN.	Typ.	MAX.	MIN.	MIN.		V _{CC} (V)		
V_{T+}	Positive-going threshold	—	0.70	—	—	—	V	1.2	Figure 1 and 2	
		0.8	1.10	1.4	0.8	1.4		2.0		
		1.0	1.45	2.0	1.0	2.0		2.7		
		1.2	1.60	2.2	1.2	2.2		3.0		
		1.5	1.95	2.4	1.5	2.4		3.6		
		1.7	2.50	3.15	1.7	3.15		4.5		
		2.1	3.00	3.85	2.1	3.85		5.5		
V_{T-}	Negative-going threshold	—	0.34	—	—	—	V	1.2	Figure 1 and 2	
		0.3	0.65	0.9	0.3	0.9		2.0		
		0.4	0.90	1.4	0.4	1.4		2.7		
		0.6	1.05	1.5	0.6	1.5		3.0		
		0.8	1.30	1.8	0.8	1.8		3.6		
		0.9	1.60	2.0	0.9	2.0		4.5		
		1.1	2.00	2.6	1.1	2.6		5.5		
V_H	Hysteresis ($V_{T+} - V_{T-}$)	—	0.30	—	—	—	V	1.2	Figure 1 and 2	
		0.2	0.55	0.8	0.2	0.8		2.0		
		0.3	0.60	1.1	0.3	1.1		2.7		
		0.4	0.65	1.2	0.4	1.2		3.0		
		0.4	0.70	1.2	0.4	1.2		3.6		
		0.4	0.80	1.4	0.4	1.4		4.5		
		0.6	1.00	1.5	0.6	1.5		5.5		

NOTES:

1. All typical values are measured at $T_{amb} = 25^\circ\text{C}$
 2. The V_{IH} and V_{IL} from the DC family characteristics are superseded by the V_{T+} and V_{T-} .

Hex inverting Schmitt-trigger

74LV14

AC CHARACTERISTICS

GND = 0V; $t_r = t_f = 2.5\text{ns}$; $C_L = 50\text{pF}$; $R_L = 500\Omega$

SYMBOL	PARAMETER	WAVEFORM	CONDITION	LIMITS					UNIT
				-40 to +85 °C		-40 to +125 °C			
			V _{CC} (V)	MIN	TYP ¹	MAX	MIN	MAX	
t _{PHL/PLH}	Propagation delay nA to nY	Figures 6, 7	1.2		80				ns
			2.0		27	37		48	
			2.7		20	28		35	
			3.0 to 3.6		15 ²	22		28	
			4.5 to 5.5			18		23	

NOTES:

1. Unless otherwise stated, all typical values are measured at $T_{amb} = 25^\circ\text{C}$
2. Typical values are measured at $V_{CC} = 3.3\text{ V}$.

TRANSFER CHARACTERISTIC WAVEFORMS

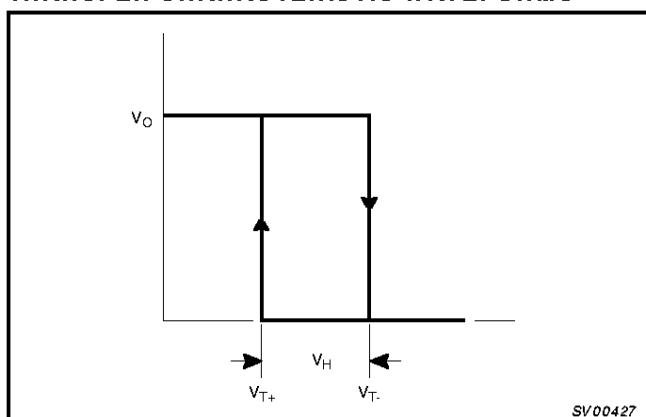


Figure 1. Transfer characteristic.

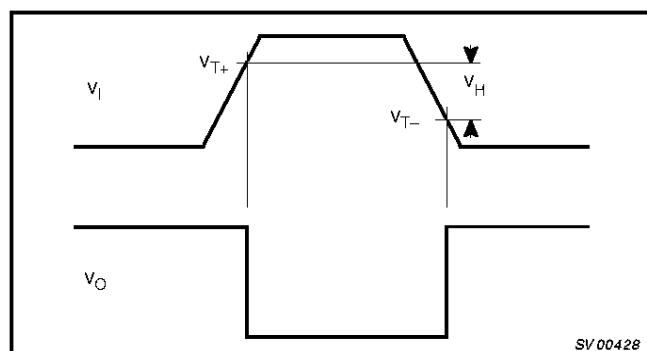
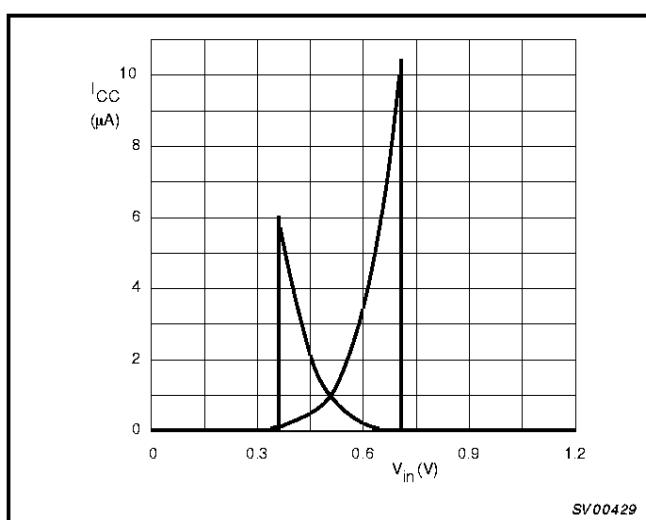
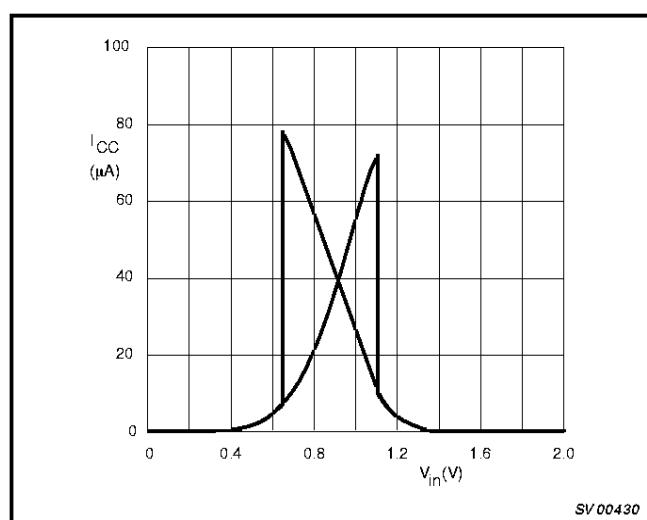
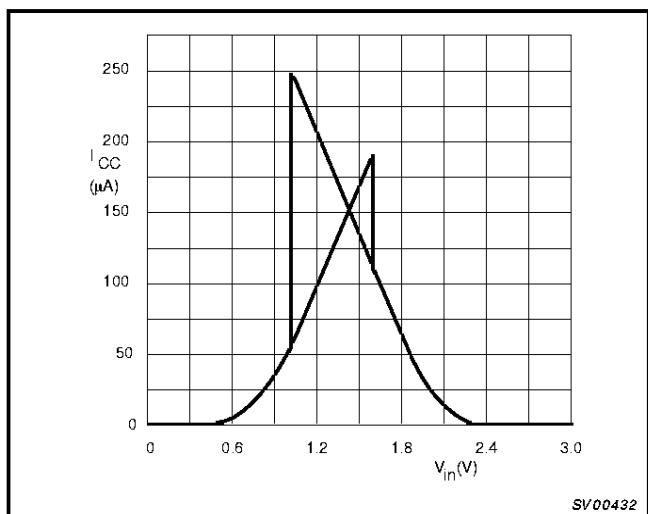


Figure 2. Definition of V_{T+} ,
 V_{T-} and V_H ;
where V_{T+} and V_{T-} are between limits of 20% and 70%

Figure 3. Typical 74LV14 transfer characteristics; $V_{CC} = 1.2\text{V}$.Figure 4. Typical 74LV14 transfer characteristics; $V_{CC} = 2.0\text{V}$.

Hex inverting Schmitt-trigger

74LV14

Figure 5. Typical 74LV14 transfer characteristics; $V_{CC} = 3.0\text{ V}$.

AC WAVEFORMS

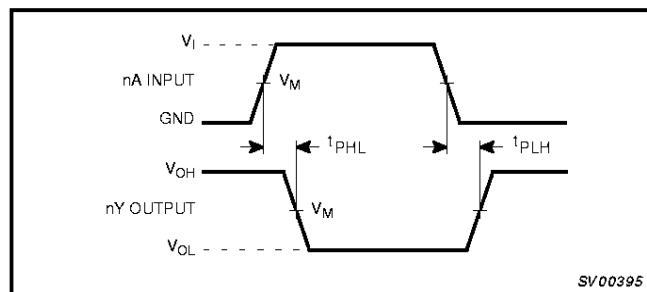
 $V_M = 1.5\text{ V}$ at $V_{CC} \geq 2.7\text{ V}$; $V_M = 0.5 \times V_{CC}$ at $V_{CC} < 2.7\text{ V}$ V_{OL} and V_{OH} are the typical output voltage drop that occur with the output load.

Figure 6. Input (nA) to output (nY) propagation delays.

TEST CIRCUIT

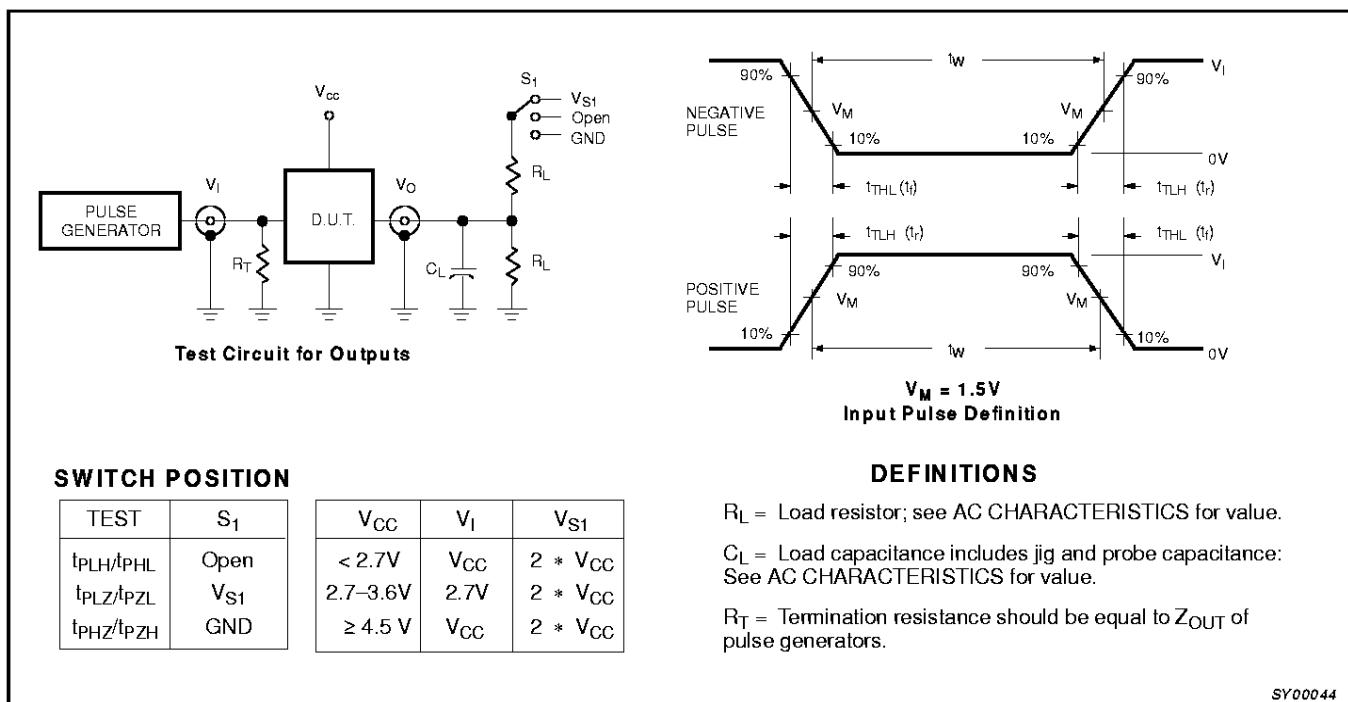


Figure 7. Load circuitry for switching times

Hex inverting Schmitt-trigger

74LV14

APPLICATION INFORMATION

The slow input rise and fall times cause additional power dissipation, this can be calculated using the following formula:

$$P_{ad} = f_i \times (t_r \times I_{CCa} + t_f \times I_{CCa}) \times V_{CC}$$

Where:

P_{ad} = additional power dissipation (μW)

f_i = input frequency (MHz)

t_r = input rise time (ns); 10% – 90%

t_f = input fall time (ns); 10% – 90%

I_{CCa} = average additional supply current (μA)

Average I_{CCa} differs with positive or negative input transitions, as shown in Figure 8.

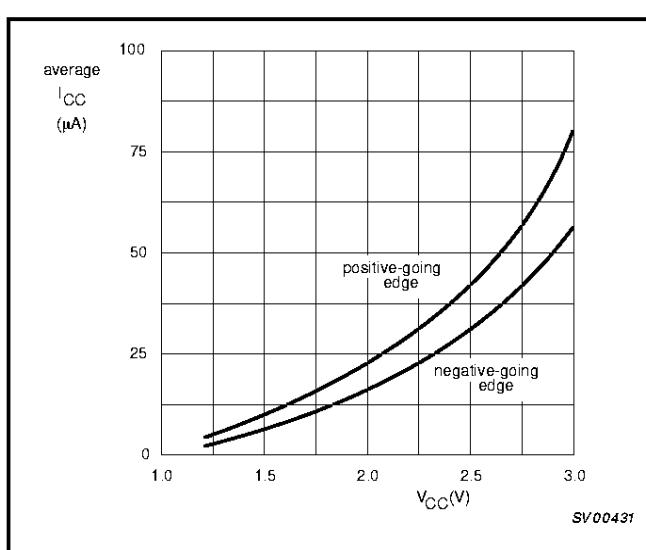


Figure 8. Average I_{CC} for LV Schmitt-trigger devices; linear change of V_i between 0.1 V_{CC} to 0.9 V_{CC} .

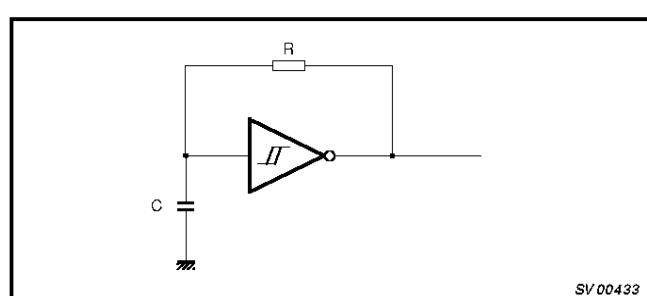


Figure 9. Relaxation oscillator using the LV14.

Note to application information:

All values given are typical unless otherwise specified.

Note to Figure 9

$$f = \frac{1}{T} \approx \frac{1}{0.8 \times RC}$$

Hex inverting Schmitt-trigger

74LV14

DIP14: plastic dual in-line package; 14 leads (300 mil)

SOT27-1

Hex inverting Schmitt-trigger

74LV14

SO14: plastic small outline package; 14 leads; body width 3.9 mm

SOT108-1

Hex inverting Schmitt-trigger

74LV14

SSOP14: plastic shrink small outline package; 14 leads; body width 5.3 mm

SOT337-1

Hex inverting Schmitt-trigger

74LV14

TSSOP14: plastic thin shrink small outline package; 14 leads; body width 4.4 mm

SOT402-1

Hex inverting Schmitt-trigger

74LV14

NOTES

Hex inverting Schmitt-trigger

74LV14

DEFINITIONS

Data Sheet Identification	Product Status	Definition
<i>Objective Specification</i>	Formative or in Design	This data sheet contains the design target or goal specifications for product development. Specifications may change in any manner without notice.
<i>Preliminary Specification</i>	Preproduction Product	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
<i>Product Specification</i>	Full Production	This data sheet contains Final Specifications. Philips Semiconductors reserves the right to make changes at any time without notice, in order to improve design and supply the best possible product.

Philips Semiconductors and Philips Electronics North America Corporation reserve the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified. Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

LIFE SUPPORT APPLICATIONS

Philips Semiconductors and Philips Electronics North America Corporation Products are not designed for use in life support appliances, devices, or systems where malfunction of a Philips Semiconductors and Philips Electronics North America Corporation Product can reasonably be expected to result in a personal injury. Philips Semiconductors and Philips Electronics North America Corporation customers using or selling Philips Semiconductors and Philips Electronics North America Corporation Products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors and Philips Electronics North America Corporation for any damages resulting from such improper use or sale.

Philips Semiconductors
811 East Arques Avenue
P.O. Box 3409
Sunnyvale, California 94088-3409
Telephone 800-234-7381

© Copyright Philips Electronics North America Corporation 1997
All rights reserved. Printed in U.S.A.

Let's make things better.

Philips
Semiconductors



PHILIPS