


NPN SOT23 Silicon Planar Epitaxial Transistors

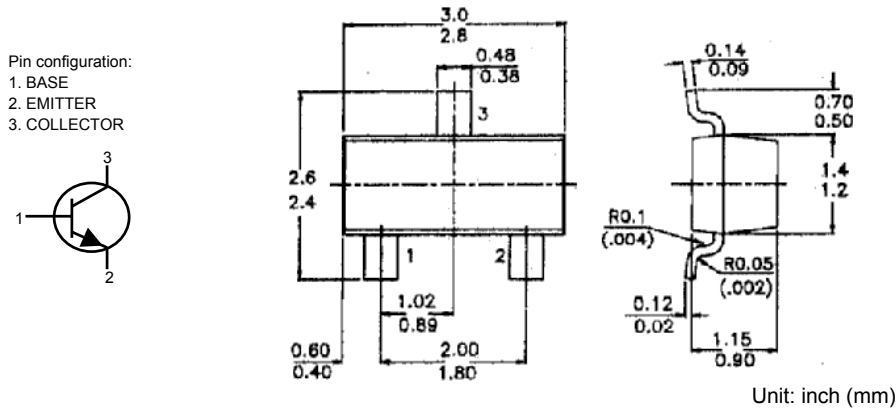

Absolute Maximum Ratings

	Symbol	Value	UNIT
Collector-base voltage (open emitter)	V_{CBO}	min 75	V
Collector-emmitter voltage (open base)	V_{CEO}	min 40	V
Emmitter base voltage (open collector)	V_{EBO}	min 6.0	V
Collector current (d.c.)	I_C	max 600	mA
Total power dissipation up to $T_{amb} = 25^{\circ}C$	P_{tot}	max 300	mW
D.C. current gain $I_C = 150mA; V_{CE} = 10V$ $I_C = 500mA; V_{CE} = 10V$	h_{FE}	100 to 300 > 40	
Transition frequency at $f = 100MHz$ $I_C = 20mA; V_{CE} = 20V$	f_T	> 300	MHz

Ratings (at $T_A = 25^{\circ}C$ unless otherwise specified)

	Symbol	Value	UNIT
Collector-base voltage (open emitter)	V_{CBO}	min 75	V
Collector-emitter voltage (open base)	V_{CEO}	min 40	V
Emitter-base voltage (open collector)	V_{EBO}	min 6.0	V
Collector current (d.c.)	I_C	max 600	mA
Total power dissipation up to $T_{amb} = 25 C$	P_{tot}	max 250	mW
Storage Temperature	T_{stg}	-55 to +150	$^{\circ}C$
Junction Temperature	T_j	max 150	$^{\circ}C$
Thermal Resistance from junction to Ambient	R_{thj-a}	500	K/W

REV: D

CMBT2222A
MMBT2222A

Characteristics (at $T_j=25\text{ }^\circ\text{C}$ unless otherwise specified)

	Symbol	Value	UNIT
Collector cut-off current $I_E = 0; V_{CB} = 60V$	I_{CBO}	< 0.01	uA
$I_E = 0; V_{CB} = 60V; T = 125\text{ }^\circ\text{C}$	I_{CBO}	< 10	
$V_{EB} = 3V; V_{CE} = 60V$	I_{CEX}	< 10	
Base current with reverse biased emitter junction $V_{FB} = 3V; V_{CE} = 60V$	I_{BEX}	< 20	nA
Emitter-base cut-off current $I_C = 0; V_{EB} = 3V$	I_{EBO}	< 10	nA
Saturation voltage $I_C = 150mA; I_B = 15m$	V_{CEsat}	< 300	mV
	V_{BEsat}	0.6 to 1.2	V
$I_C = 500mA; I_B = 50m$	V_{CEsat}	< 1.0	V
	V_{BEsat}	< 2.0	V
Breakdown voltages $I_C = 1.0mA; I_B = 0$	$V_{(BR)CEO}$	> 40	V
$I_C = 100uA; I_E = 0$	$V_{(BR)CBO}$	> 75	
$I_C = 0; I_E = 10u$	$V_{(BR)EBO}$	> 6.0	
D.C. current gain $I_C = 0.1mA; V_{CE} = 10V$	h_{FE}	> 35	
$I_C = 1mA; V_{CE} = 10V$		> 50	
$I_C = 10mA; V_{CE} = 10V$		> 75	
$I_C = 10mA; V_{CE} = 10V; T_{amb} = -55^\circ\text{C}$		> 35	
$I_C = 150mA; V_{CE} = 10V$		100 to 300	
$I_C = 150mA; V_{CE} = 1V$		> 50	
$I_C = 500mA; V_{CE} = 10V$		> 40	
Transition frequency at $f = 100\text{ MHz}$ $I_C = 20mA; V_{CE} = 20V$	f_T	> 300	MHz
Output capacitance at $f = 1\text{ MHz}$ $I_E = 0; V_{CB} = 10V$	C_O	< 8.0	pF
Input capacitance at $f = 1\text{ MHz}$ $I_E = 0; V_{EB} = 0.5V$	C_i	< 25	pF
Noise figure at $R_S = 1K\text{ ohm}$ $I_C = 100uA; V_{CE} = 10V; f = 1kHz$	F	< 4.0	dB
Switching times (between 10% and 90% levels) Turn-on time switched to $I_C = 150mA$			ns
delay time	t_d	< 10	
rise time	t_r	< 25	
Turn-off time switched from $I_C = 150mA$			
storage time	t_s	< 225	
fall time	t_f	< 60	

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.