
**Fast CMOS Non-Inverting Octal Buffer/
Line Drivers****Features**

- PI74FCT244/541T and PI74FCT2244/2541T are pin compatible with bipolar Fast Series at a higher speed and lower power consumption
- 25 Ω series resistor on all outputs (FCT2XXX only)
- TTL input and output levels
- Low ground bounce outputs
- Extremely low static power
- Hysteresis on all inputs
- Industrial operating temperature range: -40°C to +85°C
- Packaging (Pb-free & Green available):

PI74FCT244T

- 20-pin 173-mil wide plastic TSSOP (L)
- 20-pin 209-mil wide plastic SSOP (H)
- 20-pin 150-mil wide plastic QSOP (Q)
- 20-pin 300-mil wide plastic SOIC (S)

PI74FCT2244T

- 20-pin 173-mil wide plastic TSSOP (L)
- 20-pin 150-mil wide plastic QSOP (Q)
- 20-pin 300-mil wide plastic SOIC (S)

PI74FCT541T (Pb-free & Green)

- 20-pin 173-mil wide plastic TSSOP (L)
- 20-pin 150-mil wide plastic QSOP (Q)
- 20-pin 300-mil wide plastic SOIC (S)

PI74FCT2541T

- 20-pin 150-mil wide plastic QSOP (Q)
- 20-pin 300-mil wide plastic SOIC (S)

- Device models available upon request


Description

Pericom Semiconductor's PI74FCT244T/541T and PI74FCT2244/2541T are 8-bit wide driver circuits, designed to be used in applications requiring high-speed and high-output drive. Ideal applications would include bus drivers, memory drivers, address drivers, and system clock drivers.

The PI74FCT541 and 2541T provide similar driver capabilities, but have their pins physically grouped by function. All inputs are located on one side of the package, while outputs are on the opposite side, allowing for a much simpler and denser board layout.

All PI74FCT2XXX devices have a built-in 25 Ω series resistor on all outputs to reduce noise because of reflections, thus eliminating the need for an external terminating resistor.

Block Diagrams

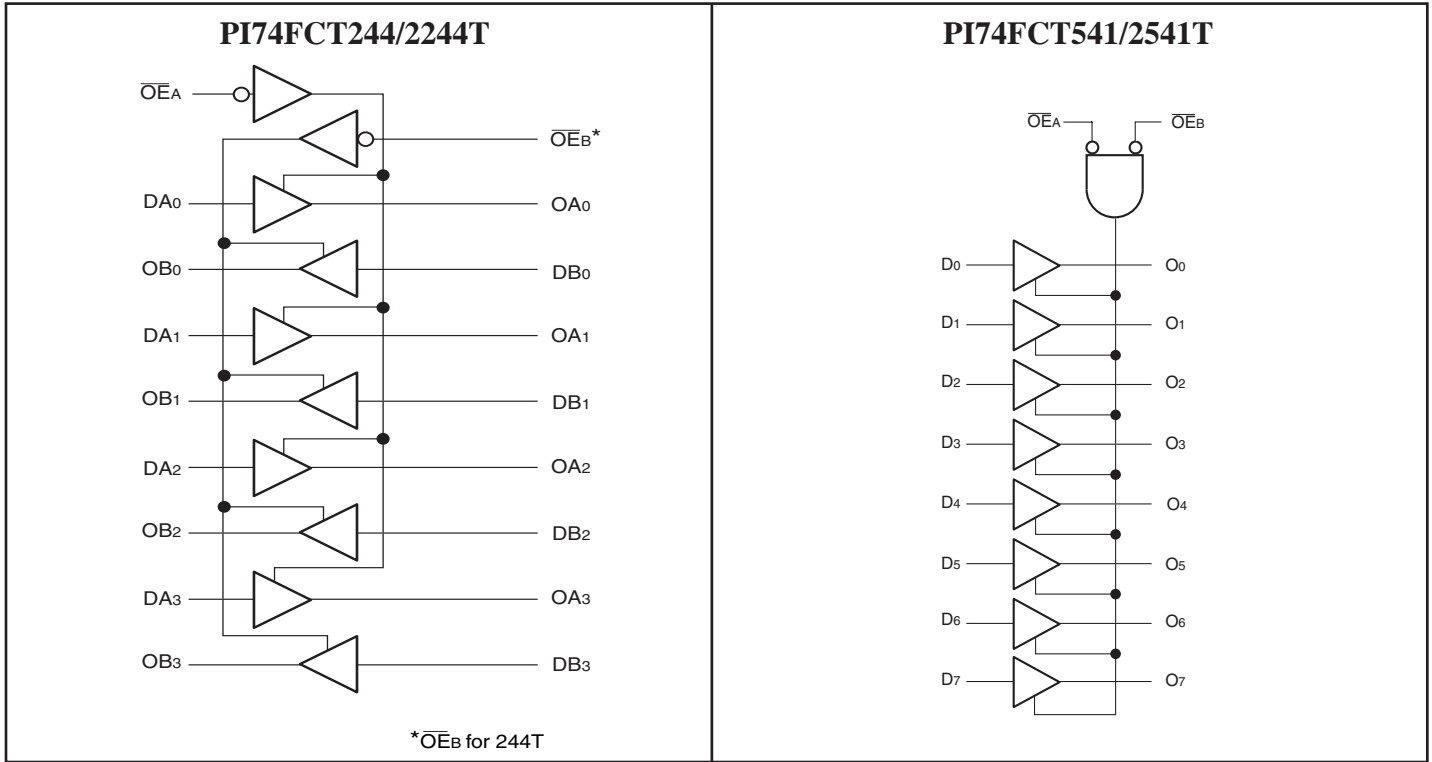

Product Pin Description

| Pin Name | Description |
|------------------------------------|-------------------------------------------|
| $\overline{OE}_A, \overline{OE}_B$ | 3-State Output Enable Inputs (Active LOW) |
| $\overline{OEB}^{(1)}$ | 3-State Output Enable Input (Active HIGH) |
| Dxx | Inputs |
| Oxx | Outputs |
| GND | Ground |
| V _{CC} | Power |

Notes:

1. Only offered for PI74FCT244T


Truth Table

| Inputs ⁽¹⁾ | | | | Outputs ⁽¹⁾ | |
|-----------------------|-------------------|------------------------|---|------------------------|-----|
| \overline{OE}_A | \overline{OE}_B | $\overline{OEB}^{(2)}$ | D | 244 | 541 |
| L | L | H | L | L | L |
| L | L | H | H | H | H |
| H | H | L | X | Z | Z |


Notes:

1. H = High Voltage Level, X = Don't Care, L = Low Voltage Level, Z = High Impedance

PI74FCT244/2244T Pin Configuration

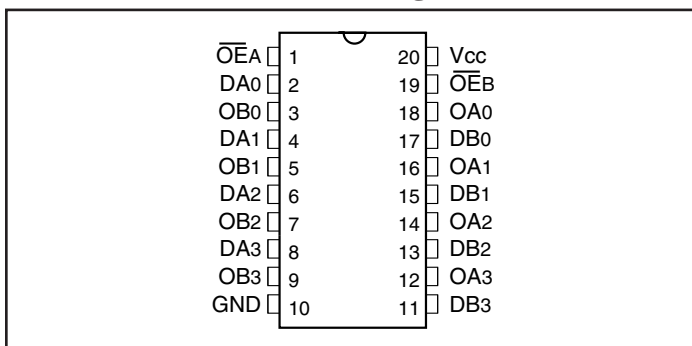

PI74FCT541/2541T Pin Configuration

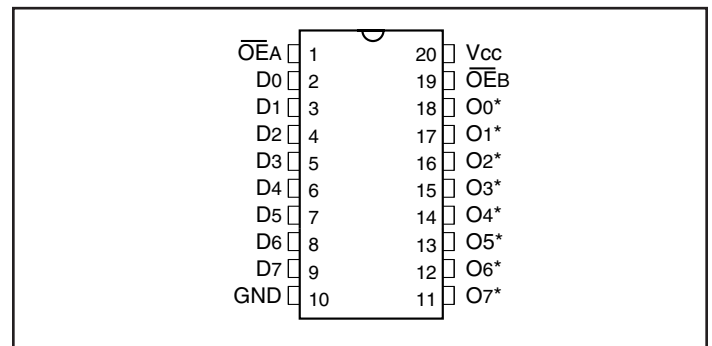

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

| | |
|--------------------------------------------------------------|-----------------|
| Storage Temperature | -65°C to +150°C |
| Ambient Temperature with Power Applied | -40°C to +85°C |
| Supply Voltage to Ground Potential (Inputs & Vcc Only) | -0.5V to +7.0V |
| Supply Voltage to Ground Potential (Outputs & D/O Only) ... | -0.5V to +7.0V |
| DC Input Voltage | -0.5V to +7.0V |
| DC Output Current..... | 120mA |
| Power Dissipation | 0.5W |

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics (Over the Operating Range, TA = -40°C to +85°C, VCC = 5.0V ± 5%)

| Parameters | Description | Test Conditions ⁽¹⁾ | | Min. | Typ ⁽²⁾ | Max. | Units |
|------------|-----------------------|----------------------------------------|---------------------------|------|--------------------|------|-------|
| VOH | Output HIGH Voltage | VCC = Min., VIN = VIH or VIL | IOH = -15.0mA | 2.4 | 3.0 | | V |
| VOL | Output LOW Current | VCC = Min., VIN = VIH or VIL | IOL = 64mA | | 0.3 | 0.55 | |
| VOL | Output LOW Current | VCC = Min., VIN = VIH or VIL | IOL = 12mA (25ΩSeries) | | 0.3 | 0.50 | |
| VIH | Input HIGH Voltage | Guaranteed Logic HIGH Level | | 2.0 | | | |
| VIL | Input LOW Voltage | Guaranteed Logic LOW Level | | | | 0.8 | |
| IiH | Input HIGH Current | VCC = Max. | VIN = VCC | | | 1 | μA |
| IiL | Input LOW Current | VCC = Max. | VIN = GND | | | -1 | |
| IOZH | High Impedance | VCC = MAX. | VOUT = 2.7V | | | 1 | |
| IOZL | Output Current | | VOUT = 0.5V | | | -1 | |
| VIK | Clamp Diode Voltage | VCC = Min., IIN = -18mA | | | -0.7 | -1.2 | V |
| IOFF | Power Down Disable | VCC = GND, VOUT = 4.5V | | | | 100 | μA |
| IOS | Short Circuit Current | VCC = Max. ⁽³⁾ , VOUT = GND | | -60 | -120 | | mA |
| VH | Input Hysteresis | | | | 200 | | |

Notes:

- For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at Vcc = 5.0V, +25°C ambient and maximum loading.
- Not more than one output should be shorted at one time. Duration of the test should not exceed one second.

Capacitance (TA = 25°C, f = 1 MHz)

| Parameters ⁽¹⁾ | Description | Test Conditions | Typ. | Max. | Units |
|---------------------------|--------------------|-----------------|------|------|-------|
| CIN | Input Capacitance | VIN = 0V | 6 | 10 | pF |
| COU | Output Capacitance | VOUT = 0V | 8 | 12 | |

Notes:

- This parameter is determined by device characterization but is not production tested.

Power Supply Characteristics

| Parameters | Description | Test Conditions ⁽¹⁾ | | Min. | Typ ⁽²⁾ | Max. | Units |
|------------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------|--------------------|---------------------|------------|
| I _{CC} | Quiescent Power Supply Current | V _{CC} = Max. | V _{IN} = GND or V _{CC} | | 0.1 | 500 | μA |
| ΔI _{CC} | Supply Current per Input @ TTL HIGH | V _{CC} = Max. | V _{IN} = 3.4V ⁽³⁾ | | 0.5 | 2.5 | mA |
| I _{CCD} | Supply Current per Input per MHz ⁽⁴⁾ | V _{CC} = Max., Outputs Open $\overline{OE}_A = \overline{OE}_B = \text{GND}$ or $\overline{OE}_A = \text{GND}, \overline{OE}_B = \text{VCC}$ One Bit Toggling 50% Duty Cycle | V _{IN} = V _{CC} V _{IN} = GND | | 0.15 | 0.25 | mA/ MHz |
| I _C | Total Power Supply Current ⁽⁶⁾ | V _{CC} = Max., Outputs Open f _i = 10 MHz 50% Duty Cycle $\overline{OE}_A = \overline{OE}_B = \text{GND}$ or $\overline{OE}_A = \text{GND}, \overline{OE}_B = \text{VCC}$ One Bit Toggling | V _{IN} = V _{CC} V _{IN} = GND | | 1.5 | 3.5 ⁽⁵⁾ | mA |
| | | | V _{IN} = 3.4V V _{IN} = GND | | 1.8 | 4.5 ⁽⁵⁾ | |
| | | V _{CC} = Max., Outputs Open f _i = 2.5 MHz 50% Duty Cycle $\overline{OE}_A = \overline{OE}_B = \text{GND}$ or $\overline{OE}_A = \text{GND}, \overline{OE}_B = \text{VCC}$ Eight Bits Toggling | V _{IN} = V _{CC} V _{IN} = GND | | 3.0 | 6.0 ⁽⁵⁾ | |
| | | | V _{IN} = 3.4V V _{IN} = GND | | 5.0 | 14.0 ⁽⁵⁾ | |

Notes:

- For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- Typical values are at V_{CC} = 5.0V, +25°C ambient.
- Per TTL driven input (V_{IN} = 3.4V); all other inputs at V_{CC} or GND.
- This parameter is not directly testable, but is derived for use in Total Power Supply Calculations.
- Values for these conditions are examples of the I_{CC} formula. These limits are guaranteed but not tested.
- I_C = I_{QUIESCENT} + I_{INPUTS} + I_{DYNAMIC}
 $I_C = I_{CC} + \Delta I_{CC} D_H N_T + I_{CCD} (f_{CP}/2 + f_i N_i)$
 I_{CC} = Quiescent Current
 ΔI_{CC} = Power Supply Current for a TTL High Input (V_{IN} = 3.4V)
 D_H = Duty Cycle for TTL Inputs High
 N_T = Number of TTL Inputs at D_H
 I_{CCD} = Dynamic Current Caused by an Input Transition Pair (HLH or LHL)
 f_{CP} = Clock Frequency for Register Devices (Zero for Non-Register Devices)
 f_i = Input Frequency
 N_i = Number of Inputs at f_i
 All currents are in milliamps and all frequencies are in megahertz.

PI74FCT244/2244T Switching Characteristics over Operating Range

| Parameters | Description | Conditions ⁽¹⁾ | 244T/2244T | | 244AT/2244AT | | 244CT/2244CT | | 244DT | | Units |
|--------------------------------------|-------------------------------------------------------------|---------------------------|------------|-----|--------------|-----|--------------|-----|-------|-----|-------|
| | | | Com. | | Com. | | Com. | | Com. | | |
| | | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{PLH} t _{PHL} | Propagation Delay ⁽²⁾ | C _L = 50pF | 1.5 | 6.5 | 1.5 | 4.8 | 1.5 | 4.1 | 1.5 | 3.6 | ns |
| t _{PZH} t _{PZL} | Output Enable Time O _{EX} to ON | | 1.5 | 8.0 | 1.5 | 6.2 | 1.5 | 5.8 | 1.5 | 4.8 | ns |
| t _{PHZ} t _{PLZ} | Output Disable Time ⁽³⁾ O _{EX} to ON | | 1.5 | 7.0 | 1.5 | 5.6 | 1.5 | 5.2 | 1.5 | 4.0 | ns |

Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
2. Minimum limits are guaranteed but not tested on Propagation Delays.
3. This parameter is guaranteed but not production tested.

PI74FCT541/2541T Switching Characteristics over Operating Range

| Parameters | Description | Conditions ⁽¹⁾ | 541T/2541T | | 541AT/2541AT | | 541CT/2541CT | | 541DT | | Units |
|--------------------------------------|-------------------------------------------------------------|------------------------------------------------|------------|-----|--------------|-----|--------------|-----|-------|-----|-------|
| | | | Com. | | Com. | | Com. | | Com. | | |
| | | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{PLH} t _{PHL} | Propagation Delay ⁽²⁾ DN to ON | C _L = 50pF R _L = 500Ω | 1.5 | 6.0 | 1.5 | 4.8 | 1.5 | 4.1 | 1.5 | 3.8 | ns |
| t _{PZH} t _{PZL} | Output Enable Time O _{EX} to ON | | 1.5 | 9.5 | 1.5 | 6.2 | 1.5 | 5.8 | 1.5 | 5.2 | ns |
| t _{PHZ} t _{PLZ} | Output Disable Time ⁽³⁾ O _{EX} to ON | | 1.5 | 6.5 | 1.5 | 5.6 | 1.5 | 5.2 | 1.5 | 5.2 | ns |

Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
2. Minimum limits are guaranteed but not tested on Propagation Delays.
3. This parameter is guaranteed but not production tested.

Ordering Information: PI74FCT244T

| Ordering Code | Package Code | Speed Grade | Package Description |
|----------------|--------------|-------------|---------------------------------------------------------------|
| PI74FCT244TH | H | Blank | 20-pin 209-mil wide plastic SSOP |
| PI74FCT244THE | H | Blank | Pb-free & Green, 20-pin 209-mil wide plastic SSOP |
| PI74FCT244TL | L | Blank | 20-pin 173-mil wide plastic TSSOP |
| PI74FCT244TLE | L | Blank | Pb-free & Green, 20-pin 173-mil wide plastic TSSOP |
| PI74FCT244ATQE | Q | A | Pb-free & Green, 20-pin 150-mil wide plastic QSOP |
| PI74FCT244ATSE | S | A | Pb-free & Green, 20-pin 300-mil wide plastic SOIC |
| PI74FCT244CTH | H | C | 20-pin 209-mil wide plastic SSOP |
| PI74FCT244CTHE | H | C | Pb-free & Green, 20-pin 209-mil wide plastic SSOP |
| PI74FCT244DTQ | Q | D | 20-pin 150-mil wide plastic QSOP |
| PI74FCT244DTSE | S | D | Pb-free & Green, 20-pin 300-mil wide plastic SOIC |
| PI74FCT244TQE | Q | Blank | Pb-free & Green, 20-pin 150-mil wide plastic QSOP |
| PI74FCT244CTQE | Q | C | Pb-free & Green, 20-pin 150-mil wide plastic QSOP |
| PI74FCT244DTQE | Q | C | Pb-free & Green, 20-pin 150-mil wide plastic QSOP |
| PI74FCT244CTSE | S | C | Pb-free & Green, 20-pin 300-mil wide plastic SOIC |
| PI74FCT244TQE | Q | | Pb-free & Green, 20-pin 150-mil wide plastic QSOP |
| PI74FCT244TQSE | Q | | Pb-free & Green, 20-pin, Tape/Reel, 150-mil wide plastic QSOP |

Notes:

- Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free and Green
- Adding an X suffix = Tape/Reel

Ordering Information: PI74FCT2244T

| Ordering Code | Package Code | Speed Grade | Package Description |
|-----------------|--------------|-------------|----------------------------------------------------|
| PI74FCT2244TQE | Q | Blank | Pb-free & Green, 20-pin 150 mil wide plastic QSOP |
| PI74FCT2244TSE | S | Blank | Pb-free & Green, 20-pin 300 mil wide plastic SOIC |
| PI74FCT2244ATLE | L | A | Pb-free & Green, 20-pin 173 mil wide plastic TSSOP |
| PI74FCT2244ATQE | Q | A | Pb-free & Green, 20-pin 150 mil wide plastic QSOP |
| PI74FCT2244ATSE | S | A | Pb-free & Green, 20-pin 300 mil wide plastic SOIC |
| PI74FCT2244CTQE | Q | C | Pb-free & Green, 20-pin 150 mil wide plastic QSOP |

Ordering Information: PI74FCT541T

| Ordering Code | Package Code | Speed Grade | Package Description |
|----------------|--------------|-------------|----------------------------------------------------|
| PI74FCT541ATQE | Q | A | Pb-free & Green, 20-pin 150-mil wide plastic QSOP |
| PI74FCT541CTLE | L | C | Pb-free & Green, 20-pin 173-mil wide plastic TSSOP |
| PI74FCT541TQE | Q | Blank | Pb-free & Green, 20-pin 150-mil wide plastic QSOP |
| PI74FCT541TS | S | Blank | 20-pin 300-mil wide plastic SOIC |
| PI74FCT541ATQ | Q | A | 20-pin 150-mil wide plastic QSOP |
| PI74FCT541ATS | S | A | 20-pin 300-mil wide plastic SOIC |
| PI74FCT541ATSE | S | A | Pb-free & Green, 20-pin 300-mil wide plastic SOIC |
| PI74FCT541TSE | T | Blank | Pb-free & Green, 20-pin 300-mil wide plastic SOIC |

Ordering Information: PI74FCT2541T

| Ordering Code | Package Code | Speed Grade | Package Description |
|-----------------|--------------|-------------|---------------------------------------------------|
| PI74FCT2541TQ | Q | Blank | 20-pin 150 mil wide plastic QSOP |
| PI74FCT2541TSE | S | Blank | Pb-free & Green, 20-pin 300 mil wide plastic SOIC |
| PI74FCT2541ATQ | Q | A | 20-pin 150 mil wide plastic QSOP |
| PI74FCT2541ATS | S | A | 20-pin 300 mil wide plastic SOIC |
| PI74FCT2541ATSE | S | A | Pb-free & Green, 20-pin 300 mil wide plastic SOIC |
| PI74FCT2541ATQE | Q | A | Pb-free & Green, 20-pin 150 mil wide plastic QSOP |

Notes:

- Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free and Green
- Adding an X suffix = Tape/Reel


Part Marking Information

Pericom's standard product mark follows our standard part number ordering information, except for those products with a speed letter code. For marking purposes, the speed letter code mark is placed after the package code letter, rather than after the device number as it is ordered.

Although all products are marked immediately after assembly to assure material traceability, Pericom does not usually mark the speed code at that time. After electrical test screening and speed binning have been completed, we then perform an "add mark" operation which places the speed code letter at the end of the complete part number.

Please refer to the example shown below:

- Part Number as ordered: PI74FCT245ATQ
- Example of Part Number as marked:

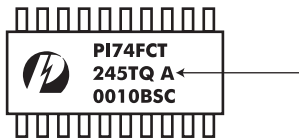

"A" is the speed code letter identifier

Notes:

- 1) 8-pin DIP, 8-pin SOIC, 8-pin TSSOP, 14-pin SOIC, 16-pin QSOP, SC70, MSOP, and SOT23 packages are not marked with the Pericom logo due to space limitations on the package.