

SN74ALS374A, SN74AS374, SN54ALS374A, SN54AS374 OCTAL D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS

D2661, APRIL 1982 – REVISED MAY 1986

- D-Type Flip-Flops In a Single Package
- 3-State Bus-Driving True Outputs
- Full Parallel Access for Loading
- Buffered Control Inputs
- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability

description

These 8-bit flip-flops feature three-state outputs designed specifically for driving highly capacitive or relatively low-impedance loads. They are particularly suitable for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.


The eight flip-flops of the 'ALS374A and 'AS374 are edge-triggered D-type flip-flops. On the positive transition of the clock the Q outputs will be set to the logic levels that were set up at the D inputs.

A buffered output-control input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or a high-impedance state. In the high-impedance state the outputs neither load nor drive the bus lines significantly. The high-impedance third state and increased drive provide the capability to drive the bus lines in a bus-organized system without need for interface or pull-up components.


The output control (\overline{OC}) does not affect the internal operation of the flip-flops. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

The SN54ALS374A and SN54AS374 are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ALS374A and SN74AS374 are characterized for operation from 0°C to 70°C .

**SN54ALS374A, SN54AS374 ... J PACKAGE
SN74ALS374A, SN74AS374 ... DW OR N PACKAGE**



**SN54ALS374A, SN54AS374 ... FK PACKAGE
(TOP VIEW)**




FUNCTION TABLE (EACH FLIP-FLOP)


INPUTS			OUTPUT
\overline{OC}	CLK	D	Q
L	↑	H	H
L	↑	L	L
L	L	X	Q_0
H	X	X	Z

SN74ALS374A, SN74AS374, SN54ALS374A, SN54AS374
OCTAL D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS

logic symbol†



logic diagram (positive logic)

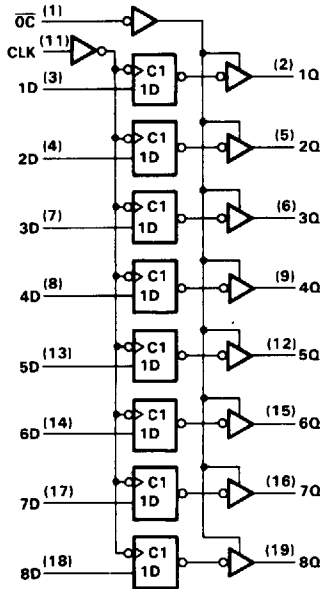

†This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12
 Pin numbers shown are for DW, J, and N packages

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Voltage applied to a disabled 3-state output	5.5 V
Operating free-air temperature range: SN54ALS374A, SN54AS374	-55 °C to 125 °C
SN74ALS374A, SN74AS374	0 °C to 70 °C
Storage temperature range	-65 °C to 150 °C



SN74ALS374A, SN54ALS374A OCTAL D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS

recommended operating conditions

			SN54ALS374A			SN74ALS374A			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage		4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High-level input voltage		2			2			V
V _{IL}	Low-level input voltage		0.8			0.8			V
I _{OH}	high-level output current		-1			-2.6			mA
I _{OL}	Low-level output current		12			24			mA
f _{clock}	Clock frequency		0	30		0	35		MHz
t _w	Pulse duration	CLK high	16.5			14			ns
		CLK low	16.5			14			
t _{su}	Setup time, data before CLK!		10			10			ns
t _h	Hold time, data after CLK!		4			0			ns
T _A	Operating free-air temperature		-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54ALS374A			SN74ALS374A			UNIT
		MIN	TYP [†]	MAX	MIN	TYP [†]	MAX	
V _{IK}	V _{CC} = 4.5 V, I _I = -18 mA	-1.5			-1.5			V
V _{OH}	V _{CC} = 4.5 V to 5.5 V, I _{OH} = -0.4 mA	V _{CC} - 2			V _{CC} - 2			V
	V _{CC} = 4.5 V, I _{OH} = -1 mA	2.4	3.3					
	V _{CC} = 4.5 V, I _{OH} = -2.6 mA				2.4	3.2		
V _{OL}	V _{CC} = 4.5 V, I _{OL} = 12 mA	0.25		0.4	0.25	0.4		V
	V _{CC} = 4.5 V, I _{OL} = 24 mA				0.35	0.5		
I _{OZH}	V _{CC} = 5.5 V, V _O = 2.7 V	20			20			μA
I _{OZL}	V _{CC} = 5.5 V, V _O = 0.4 V	-20			-20			μA
I _I	V _{CC} = 5.5 V, V _I = 7 V	0.1			0.1			mA
I _{IH}	V _{CC} = 5.5 V, V _I = 2.7 V	20			20			μA
I _{IL}	V _{CC} = 5.5 V, V _I = 0.4 V	-0.2			-0.2			mA
I _{O[‡]}	V _{CC} = 5.5 V, V _O = 2.25 V	-30	-112		-30	-112		mA
I _{CC}	V _{CC} = 5.5 V	Outputs high	11	19	11	19		mA
		Outputs low	19	28	19	28		
		Outputs disabled	20	31	20	31		

[†]All typical values are at V_{CC} = 5 V, T_A = 25°C

[‡]The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current I_{OS}.

SN74ALS374A, SN54ALS374A OCTAL D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS


switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R ₁ = 500 Ω, R ₂ = 500 Ω, T _A = MIN to MAX				UNIT
			SN54ALS374A		SN74ALS374A		
			MIN	MAX	MIN	MAX	
f _{max}			30		35	MHz	
t _{PLH}	CLK	Q	3	21	3	12	
t _{PHL}			5	19	5	16	
t _{PZH}	\overline{OC}	Q	3	27	3	17	
t _{PZL}			5	23	5	18	
t _{PHZ}	\overline{OC}	Q	1	12	1	10	
t _{PLZ}			2	33	2	18	

NOTE 1 Load circuit and voltage waveforms are shown in Section 1

TYPICAL APPLICATION DATA

EXPANDABLE 4-WORD BY 8-BIT GENERAL REGISTER FILE

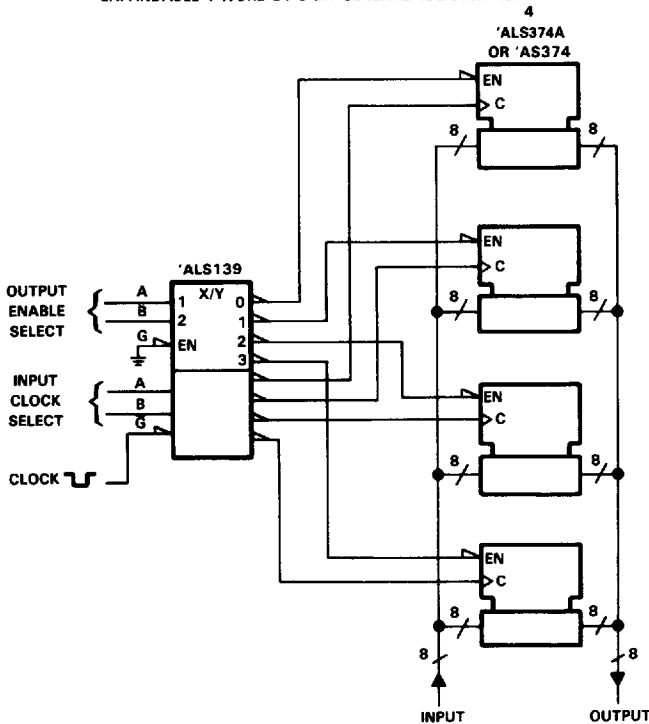

SN74AS374, SN54AS374 OCTAL D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS

recommended operating conditions

			SN54AS374			SN74AS374			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage		4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High-level input voltage		2			2			V
V _{IL}	Low-level input voltage					0.7			V
I _{OH}	High-level output current					-12			mA
I _{OL}	Low-level output current					32			mA
f _{clock}	Clock frequency		0			100			MHz
t _w	Pulse duration	CLK high	5.5			4			ns
		CLK low	5			3			
t _{su}	Setup time data before CLK↑		3			2			ns
t _h	Hold time, data after CLK↓		3			2			ns
T _A	Operating free air temperature		-55			125			°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54AS374			SN74AS374			UNIT	
		MIN	TYP [†]	MAX	MIN	TYP [†]	MAX		
V _{IK}	V _{CC} = 4.5 V, I _I = -18 mA	-1.2			-1.2			V	
V _{OH}	V _{CC} = 4.5 V to 5.5 V, I _{OH} = -2 mA	V _{CC} - 2			V _{CC} - 2			V	
	V _{CC} = 4.5 V, I _{OH} = -12 mA	2.4 3.2							
	V _{CC} = 4.5 V, I _{OH} = -15 mA				2.4 3.3				
V _{OL}	V _{CC} = 4.5 V, I _{OL} = 32 mA	0.29 0.5						V	
	V _{CC} = 4.5 V, I _{OL} = 48 mA				0.34 0.5				
I _{OZH}	V _{CC} = 5.5 V, V _O = 2.7 V	50			50			μA	
I _{OZL}	V _{CC} = 5.5 V, V _O = 0.4 V	-50			-50			μA	
I _I	V _{CC} = 5.5 V, V _I = 7 V	0.1			0.1			mA	
I _{IH}	V _{CC} = 5.5 V, V _I = 2.7 V	20			20			μA	
I _{IL}	OC, CLK Data	V _{CC} = 5.5 V, V _I = 0.4 V	-0.5			-0.5			mA
			-3			-2			
I _{O[‡]}	V _{CC} = 5.5 V, V _O = 2.25 V	-30 -112			-30 -112			mA	
I _{CC}	V _{CC} = 5.5 V	Outputs high	77 120		77 120		mA		
		Outputs low	84 128		84 128				
		Outputs disabled	84 128		84 128				

[†]All typical values are at V_{CC} = 5 V, T_A = 25°C.

[‡]The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current I_{OS}.

SN74AS374, SN54AS374 OCTAL D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS

switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega$ $R_2 = 500 \Omega$ $T_A = \text{MIN to MAX}$				UNIT
			SN54AS374		SN74AS374		
			MIN	MAX	MIN	MAX	
f_{max}			100		125		MHz
t_{PLH}	CLK	Q	3	11	3	8	ns
t_{PHL}			4	11.5	4	9	
t_{PZH}	\overline{OC}	Q	2	7	2	6	ns
t_{PZL}			3	11	3	10	
t_{PHZ}	\overline{OC}	Q	2	7	2	6	ns
t_{PLZ}			2	7	2	6	

NOTE 1 Load circuit and voltage waveforms are shown in Section 1

TYPICAL APPLICATION DATA

BIDIRECTIONAL BUS DRIVER

