



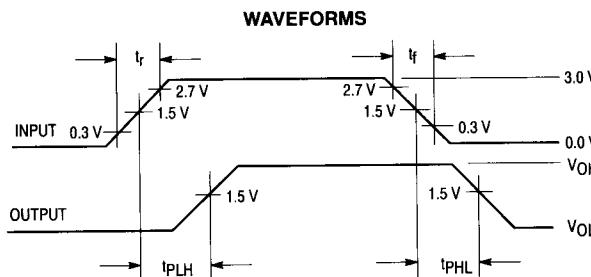

MOTOROLA

Quad 2-Input AND Gate


ELECTRICALLY TESTED PER:
MIL-M-38510/34001

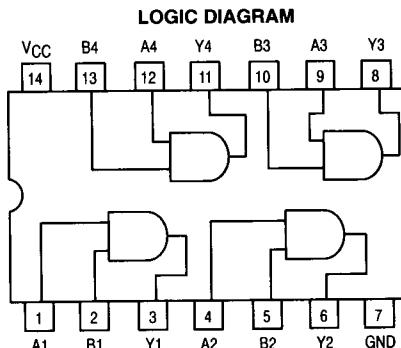

NOTES:

1. Pulse generator has the following characteristics: $t_r = t_f \leq 2.5$ ns, PRR = 1.0 MHz, and $Z_{OUT} \approx 50$ Ω .
2. Terminal conditions (pins not designated) may be high ≥ 2.0 V, low ≤ 0.8 V, or open.
3. $C_L = 50$ pF $\pm 10\%$, including scope probe, wiring and stray capacitance, without package in test fixture.
4. Voltage measurements are to be made with respect to network ground terminal.
5. $R_L = 500 \Omega \pm 5.0\%$.

AC TEST CIRCUIT

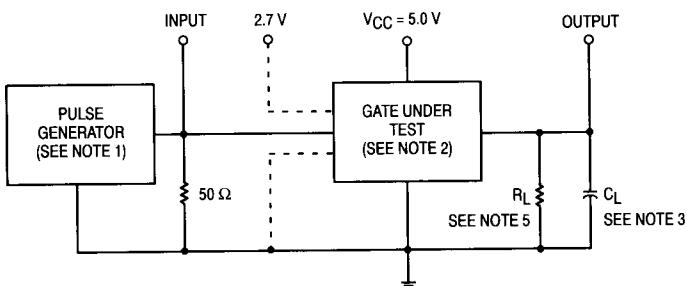

Military 54F08



AVAILABLE AS:

- 1) JAN: JM38510/34001BXA
- 2) SMD: N/A
- 3) 883: 54F08/BXAJC

X = CASE OUTLINE AS FOLLOWS:
PACKAGE: CERDIP: C
CERFLAT: D
LCC: 2

THE LETTER "M" APPEARS
BEFORE THE / ON LCC.

PIN ASSIGNMENTS

FUNCT.	DIL 632-08	FLATS 717-04	LCC 756A-02	BURN-IN (COND. A)
A1	1	1	2	V _{CC}
B1	2	2	3	V _{CC}
Y1	3	3	4	OPEN
A2	4	4	6	V _{CC}
B2	5	5	8	V _{CC}
Y2	6	6	9	OPEN
GND	7	7	10	GND
Y3	8	8	12	OPEN
A3	9	9	13	V _{CC}
B3	10	10	14	V _{CC}
Y4	11	11	16	OPEN
A4	12	12	18	V _{CC}
B4	13	13	19	V _{CC}
V _{CC}	14	14	20	V _{CC}

BURN-IN CONDITIONS:
 $V_{CC} = 5.0$ V MIN/6.0 V MAX

TRUTH TABLE

A	B	Y
0	0	0
0	1	1
1	0	1
1	1	0

Symbol	Parameter	Limits						Unit	Test Condition (Unless Otherwise Specified)		
	Static Parameters:	+ 25°C		+ 125°C		- 55°C					
		Subgroup 1		Subgroup 2		Subgroup 3					
		Min	Max	Min	Max	Min	Max				
V _{OH}	Logical "1" Output Voltage	2.5		2.5		2.5		V	V _{CC} = 4.5 V, I _{OH} = -1.0 mA, V _{IH} = 2.0 V (both inputs).		
V _{OL}	Logical "0" Output Voltage		0.5		0.5		0.5	V	V _{CC} = 4.5 V, I _{OL} = 20 mA, V _{IL} = 0.8 V, other input = 2.0 V.		
V _{IC}	Input Clamping Voltage		-1.2					V	V _{CC} = 4.5 V, I _{IN} = -18 mA, other input is open.		
I _{IH}	Logical "1" Input Current		20		20		20	µA	V _{CC} = 5.5 V, V _{IH} = 2.7 V, other input = 0 V.		
I _{IHH}	Logical "1" Input Current		100		100		100	µA	V _{CC} = 5.5 V, V _{IHH} = 7.0 V, other input = 0 V.		
I _{IL}	Logical "0" Input Current	-0.03	-0.6	-0.03	-0.6	-0.03	-0.6	mA	V _{CC} = 5.5 V, V _{IL} = 0.5 V, other input = 5.5 V.		
I _{OD}	Diode Current	60		60		60		mA	V _{CC} = 4.5 V, V _{IN} = GND, other input is open, V _{OUT} = 2.5 V.		
I _{OS}	Output Short Circuit Current	-60	-150	-60	-150	-60	-150	mA	V _{CC} = 5.5 V, V _{IN} = 5.5 V, (both inputs), V _{OUT} = 0 V.		
I _{CCH}	Power Supply Current		8.3		8.3		8.3	mA	V _{CC} = 5.5 V, V _{IN} = 5.5 V (both inputs).		
I _{CCL}	Power Supply Current		12.9		12.9		12.9	mA	V _{CC} = 5.5 V, V _{IN} = 0 V (both inputs).		
V _{IH}	Logical "1" Input Voltage	2.0		2.0		2.0		V	V _{CC} = 4.5 V.		
V _{IL}	Logical "0" Input Voltage		0.8		0.8		0.8	V	V _{CC} = 4.5 V.		
	Functional Tests	Subgroup 7		Subgroup 8A		Subgroup 8B			per Truth Table with V _{CC} = 5.0 V, V _{INL} = 0.5 V, and V _{INH} = 2.5 V.		

Symbol	Parameter	Limits						Unit	Test Condition (Unless Otherwise Specified)		
	Switching Parameters:	+ 25°C		+ 125°C		- 55°C					
		Subgroup 9		Subgroup 10		Subgroup 11					
		Min	Max	Min	Max	Min	Max				
t _{PHL}	Propagation Delay /Data-Output Output High-Low	2.5	5.3	2.0	7.5	2.0	7.5	ns	V _{CC} = 5.0 V, C _L = 50 pF, R _L = 500 Ω.		
t _{PLH}	Propagation Delay /Data-Output Output Low-High	3.0	5.6	2.5	7.5	2.5	7.5	ns	V _{CC} = 5.0 V, C _L = 50 pF, R _L = 500 Ω.		