

NC7WZ16 TinyLogic™ UHS Dual Buffer

General Description

The NC7WZ16 is a dual buffer from Fairchild's Ultra High Speed Series of TinyLogic™ in the space saving SC70 6-lead package. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a very broad V_{CC} operating range. The device is specified to operate over the 1.65V to 5.5V V_{CC} range. The inputs and outputs are high impedance when V_{CC} is 0V. Inputs tolerate voltages up to 7V independent of V_{CC} operating voltage.


Features

- Space saving SC70 6-lead package
- Ultra High Speed: t_{PD} 2.4 ns Typ into 50 pF at 5V V_{CC}
- High Output Drive: ± 24 mA at 3V V_{CC}
- Broad V_{CC} Operating Range: 1.65V to 5.5V
- Matches the performance of LCX when operated at 3.3V V_{CC}
- Power down high impedance inputs/outputs
- Overvoltage tolerant inputs facilitate 5V to 3V translation
- Patented noise/EMI reduction circuitry implemented


Ordering Code:

| Order Number | Package Number | Product Code Top Mark | Package Description | Supplied As |
|--------------|----------------|-----------------------|-------------------------------------|----------------------------|
| NC7WZ16P6 | MAA06A | Z16 | 6-Lead SC70, EIAJ SC88, 1.25mm Wide | 250 Units on Tape and Reel |
| NC7WZ16P6X | MAA06A | Z16 | 6-Lead SC70, EIAJ SC88, 1.25mm Wide | 3k Units on Tape and Reel |

Logic Symbol




Connection Diagrams



Pin Descriptions

| Pin Names | Description |
|------------|-------------|
| A_1, A_2 | Data Inputs |
| Y_1, Y_2 | Output |

Pin One Orientation Diagram



Function Table

$$Y = A$$

| Input | Output |
|-------|--------|
| A | Y |
| L | L |
| H | H |

H = HIGH Logic Level
L = LOW Logic Level

AAA represents Product Code Top Mark - see ordering code
Note: Orientation of Top Mark determines Pin One location. Read the top product code mark left to right, Pin One is the lower left pin (see diagram).

TinyLogic™ is a trademark of Fairchild Semiconductor Corporation.

Absolute Maximum Ratings (Note 1)

| | |
|--|-----------------|
| Supply Voltage (V_{CC}) | -0.5V to +7.0V |
| DC Input Voltage (V_{IN}) | -0.5V to +7.0V |
| DC Output Voltage (V_{OUT}) | -0.5V to +7.0V |
| DC Input Diode Current (I_{IK}) | |
| $V_{IN} < 0V$ | -50 mA |
| DC Output Diode Current (I_{OK}) | |
| $V_{OUT} < 0V$ | -50 mA |
| DC Output Source/Sink Current (I_{OUT}) | ±50 mA |
| DC V_{CC}/GND Current (I_{CC}/I_{GND}) | ±100 mA |
| Storage Temperature (T_{STG}) | -65°C to +150°C |
| Junction Temperature under Bias (T_J) | 150°C |
| Junction Lead Temperature (T_L) | |
| (Soldering, 10 seconds) | 260°C |
| Power Dissipation (P_D) @ +85°C | 180 mW |

Recommended Operating Conditions (Note 2)

| | |
|---|----------------|
| Supply Voltage | |
| Operating (V_{CC}) | 1.65V to 5.5V |
| Data Retention | 1.5V to 5.5V |
| Input Voltage (V_{IN}) | 0V to 5.5V |
| Output Voltage (V_{OUT}) | 0V to V_{CC} |
| Input Rise and Fall Time (t_r, t_f) | |
| $V_{CC} = 1.8V, 2.5V \pm 0.2V$ | 0 to 20 ns/V |
| $V_{CC} = 3.3V \pm 0.3V$ | 0 to 10 ns/V |
| $V_{CC} = 5.5V \pm 0.5V$ | 0 to 5 ns/V |
| Operating Temperature (T_A) | -40°C to +85°C |
| Thermal Resistance (θ_{JA}) | 350°C/W |

Note 1: Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation outside datasheet specifications.

Note 2: Unused inputs must be held HIGH or LOW. They may not float.

DC Electrical Characteristics


| Symbol | Parameter | V_{CC} (V) | $T_A = +25^\circ C$ | | | $T_A = -40^\circ C$ to $+85^\circ C$ | | Units | Conditions | |
|-----------|--------------------------------------|----------------------------|-------------------------------|------|------|--------------------------------------|-----|-------------------|---|--|
| | | | Min | Typ | Max | Min | Max | | | |
| V_{IH} | HIGH Level Control Input Voltage | 1.65 to 1.95 2.3 to 5.5 | 0.75 V_{CC} 0.7 V_{CC} | | | 0.75 V_{CC} 0.7 V_{CC} | | V | | |
| V_{IL} | LOW Level Control Input Voltage | 1.65 to 1.95 2.3 to 5.5 | 0.25 V_{CC} 0.3 V_{CC} | | | 0.25 V_{CC} 0.3 V_{CC} | | V | | |
| V_{OH} | HIGH Level Control Output Voltage | 1.65 | 1.55 | 1.65 | 1.55 | | V | $V_{IN} = V_{IH}$ | $I_{OH} = -100 \mu A$ | |
| | | 1.8 | 1.7 | 1.8 | 1.7 | | | | | |
| V_{OH} | HIGH Level Control Output Voltage | 2.3 | 2.2 | 2.3 | 2.2 | | V | $V_{IN} = V_{IH}$ | $I_{OH} = -4 \text{ mA}$ $I_{OH} = -8 \text{ mA}$ $I_{OH} = -16 \text{ mA}$ $I_{OH} = -24 \text{ mA}$ $I_{OH} = -32 \text{ mA}$ | |
| | | 3.0 | 2.9 | 3.0 | 2.9 | | | | | |
| | | 4.5 | 4.4 | 4.5 | 4.4 | | | | | |
| | | 1.65 | 1.29 | 1.52 | 1.21 | | | | | |
| | | 2.3 | 1.9 | 2.14 | 1.9 | | | | | |
| | | 3.0 | 2.4 | 2.75 | 2.4 | | | | | |
| | | 3.0 | 2.3 | 2.62 | 2.3 | | | | | |
| | | 4.5 | 3.8 | 4.13 | 3.8 | | | | | |
| V_{OL} | LOW Level Control Output Voltage | 1.65 | 0.0 | | | 0.1 | | V | $V_{IN} = V_{IL}$ | $I_{OL} = 100 \mu A$ $I_{OL} = 4 \text{ mA}$ $I_{OL} = 8 \text{ mA}$ $I_{OL} = 16 \text{ mA}$ $I_{OL} = 24 \text{ mA}$ $I_{OL} = 32 \text{ mA}$ |
| | | 1.8 | 0.0 | | | 0.1 | | | | |
| | | 2.3 | 0.0 | | | 0.1 | | | | |
| | | 3.0 | 0.0 | | | 0.1 | | | | |
| | | 4.5 | 0.0 | | | 0.1 | | | | |
| | | 1.65 | 0.08 | | | 0.24 | | | | |
| | | 2.3 | 0.10 | | | 0.3 | | | | |
| | | 3.0 | 0.16 | | | 0.4 | | | | |
| 3.0 | 0.24 | | | 0.55 | | | | | | |
| 4.5 | 0.25 | | | 0.55 | | | | | | |
| I_{IN} | Input Leakage Current | 0 to 5.5 | | | | ±0.1 | | ±1.0 | μA | $0 \leq V_{IN} \leq 5.5V$ |
| I_{OFF} | Power Off Leakage Current | 0.0 | | | | 1.0 | | 10 | μA | V_{IN} or $V_{OUT} = 5.5V$ |
| I_{CC} | Quiescent Supply Current | 1.65 to 5.5 | | | | 1.0 | | 10 | μA | $V_{IN} = 5.5V, GND$ |

AC Electrical Characteristics

| Symbol | Parameter | V _{CC} (V) | T _A = +25°C | | | T _A = -40°C to +85°C | | Units | Conditions | Fig. No. |
|------------------|-------------------|------------------------|------------------------|-----|-----|---------------------------------|------|-------|--|-----------------|
| | | | Min | Typ | Max | Min | Max | | | |
| t _{PLH} | Propagation Delay | 1.65 | 1.8 | 5.5 | 9.6 | 1.8 | 10.6 | ns | C _L = 15 pF, R _L = 1 MΩ | Figures 1, 3 |
| t _{PHL} | | 1.8 | 1.8 | 4.6 | 8.0 | 1.8 | 8.8 | | | |
| | | 2.5 ± 0.2 | 1.0 | 3.0 | 5.2 | 1.0 | 5.8 | | | |
| | | 3.3 ± 0.3 | 0.8 | 2.3 | 3.6 | 0.8 | 4.0 | | | |
| | | 5.0 ± 0.5 | 0.5 | 1.8 | 2.9 | 0.5 | 3.2 | | | |
| t _{PLH} | Propagation Delay | 3.3 ± 0.3 | 1.2 | 3.0 | 4.6 | 1.2 | 5.1 | ns | C _L = 50 pF, R _L = 500Ω | Figures 1, 3 |
| t _{PHL} | | 5.0 ± 0.5 | 0.8 | 2.4 | 3.8 | 0.8 | 4.2 | | | |
| C _{IN} | Input Capacitance | 0 | 2.5 | | | | | pF | | |
| C _{PD} | Power Dissipation | 3.3 | 10 | | | | | pF | (Note 3) | Figure 2 |
| | Capacitance | 5.0 | 12 | | | | | | | |


Note 3: C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. (See Figure 2.) C_{PD} is related to I_{CCD} dynamic operating current by the expression:
 $I_{CCD} = (C_{PD})(V_{CC})(f_{IN}) + (I_{CCstatic})$.

AC Loading and Waveforms



C_L includes load and stray capacitance
 Input PRR = 1.0 MHz; t_W = 500 ns

FIGURE 1. AC Test Circuit



Input = AC Waveform; t_r = t_f = 1.8 ns;
 PRR = 10 MHz; Duty Cycle = 50%

FIGURE 2. I_{CCD} Test Circuit


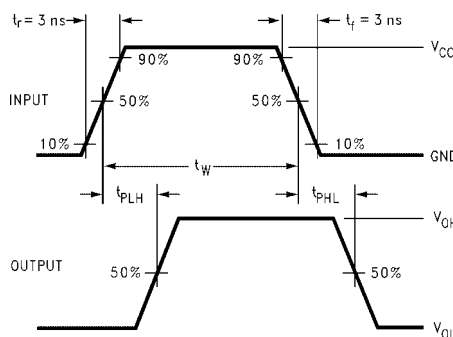


FIGURE 3. AC Waveforms


Tape and Reel Specification (Continued)

REEL DIMENSIONS inches (millimeters)

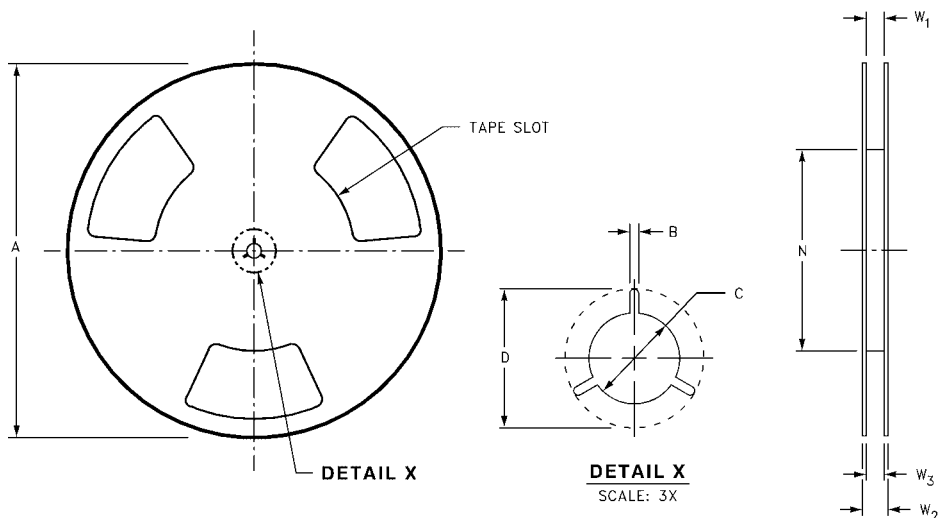

| Tape Size | A | B | C | D | N | W1 | W2 | W3 |
|-----------|----------------|-----------------|------------------|------------------|------------------|---|------------------|--|
| 8 mm | 7.0 (177.8) | 0.059 (1.50) | 0.512 (13.00) | 0.795 (20.20) | 2.165 (55.00) | 0.331 + 0.059/-0.000 (8.40 + 1.50/-0.00) | 0.567 (14.40) | W1 + 0.078/-0.039 (W1 + 2.00/-1.00) |

Physical Dimensions inches (millimeters) unless otherwise noted

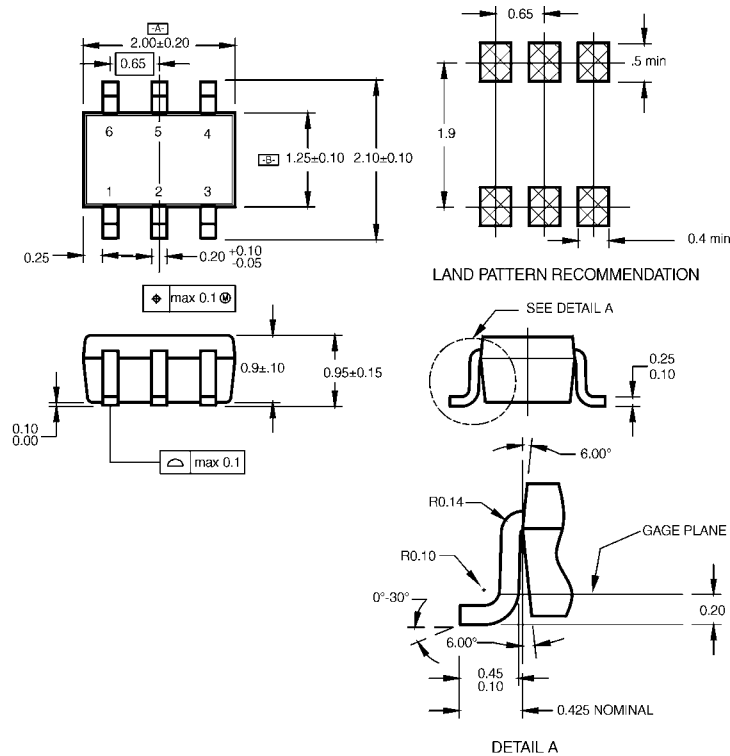

NOTES:

- A. CONFORMS TO EIAJ REGISTERED OUTLINE DRAWING SC88.
- B. DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH.
- C. DIMENSIONS ARE IN MILLIMETERS.

MAA06ARevC

**6-Lead SC70, EIAJ SC88, 1.25mm Wide
Package Number MAA06A**

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com