

Product Features:

Common Features:

- PI74FCT16240T and PI74FCT162240T have high current drive and four speed grades.
Standard speeds at 8.0 ns max.
"A" speeds at 4.8 ns max.
"C" speeds at 4.3 ns max.
"D" speeds at 3.6 ns max.
"E" speeds at 3.2 ns max.
- $V_{CC} = 5\text{ V} \pm 10\%$
- Hysteresis on all inputs
- Packaged in 48-pin plastic TSSOP and SSOP

PI74FCT16240T Features:

- High output drive: $I_{OH} = -32\text{ mA}$; $I_{OL} = 64\text{ mA}$
- Power off disable outputs permit "live insertion"
- Typical V_{OLP} (Output Ground Bounce) $< 1.0\text{ V}$ at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PI74FCT162240T Features:

- Balanced output drivers: $\pm 24\text{ mA}$
- Reduced system switching noise
- Typical V_{OLP} (Output Ground Bounce) $< 0.6\text{ V}$ at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

Fast CMOS 16-Bit Octal Buffer/Line Drivers

Product Description:

Pericom Semiconductor's PI74FCT series of logic circuits are produced in the Company's advanced 0.8 micron CMOS technology, achieving industry leading speed grades.


The PI74FCT16240T and PI74FCT162240T are inverting 16-bit buffer/line drivers designed for applications driving high capacitance loads and low impedance backplanes. These high-speed, low power devices offer bus/backplane interface capability and a flow-through organization for ease of board layout. These devices are designed with three-state controls to operate in a Quad-Nibble, Dual-Byte, or a single 16-bit word mode.

The PI74FCT16240T output buffers are designed with a Power-Off disable allowing "live insertion" of boards when used as backplane drivers.

The PI74FCT162240T has $\pm 24\text{ mA}$ balanced output drivers. It is designed with current limiting resistors at its outputs to control the output edge rate resulting in lower ground bounce and undershoot. This eliminates the need for external terminating resistors for most interface applications.

All products are available in 48-pin 240 mil wide plastic TSSOP and 300 mil wide plastic SSOP packages.

Logic Block Diagram

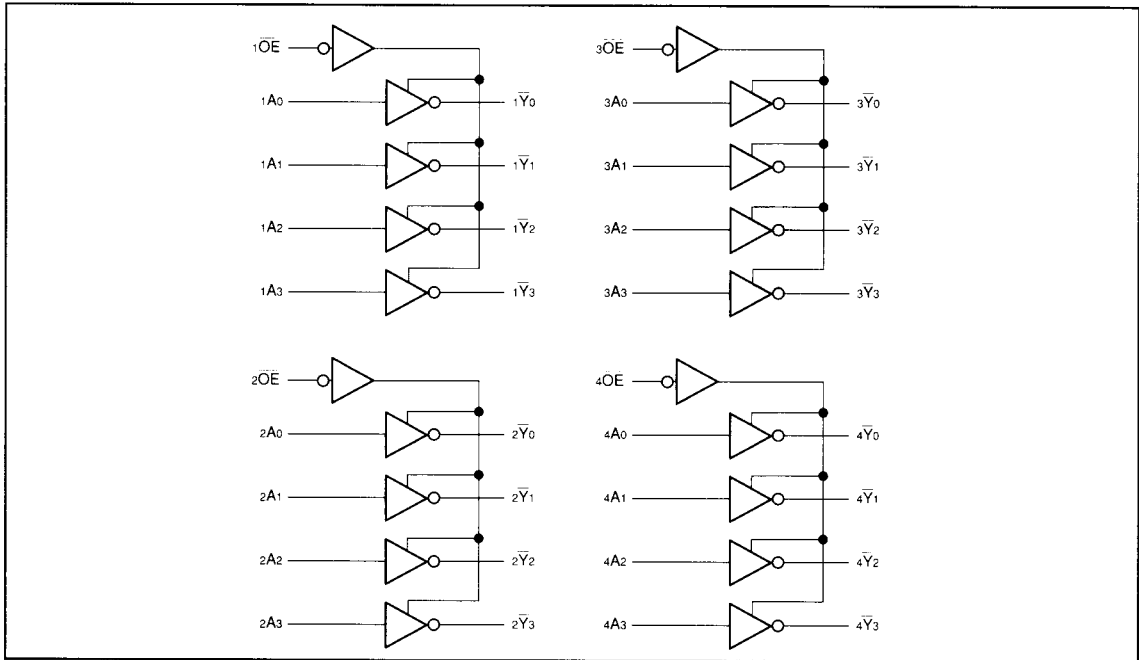

Product Pin Description


Pin Name	Description
xOE	3-State Output Enable Inputs (Active LOW)
xAx	Inputs
xYx	3-State Outputs
GND	Ground
Vcc	Power

Truth Table

Inputs ⁽¹⁾		Outputs ⁽¹⁾
xOE	xAx	xYx
L	L	H
L	H	L
H	X	Z

NOTE: 1. H = High Voltage Level, X = Don't Care, L = Low Voltage Level, Z = High Impedance

Product Pin Configuration

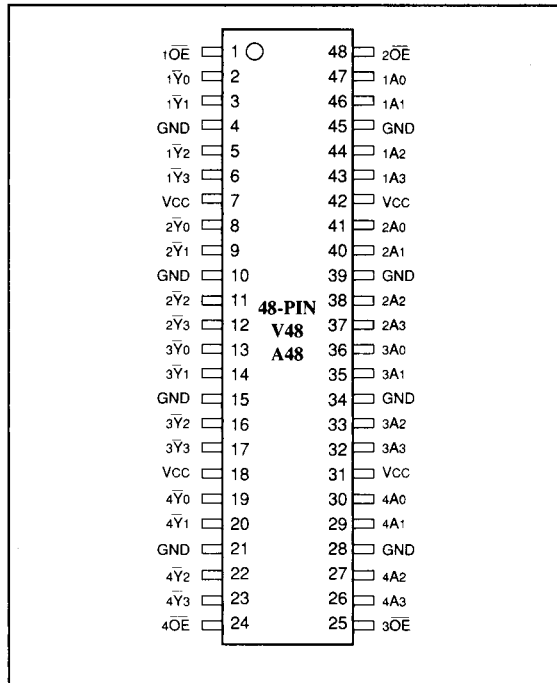

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature	-55°C to +125°C
Ambient Temperature with Power Applied	-40°C to +85°C
Supply Voltage to Ground Potential (Inputs & Vcc Only)	-0.5V to +7.0V
Supply Voltage to Ground Potential (Outputs & D/O Only)	-0.5V to Vcc
DC Input Voltage	-0.5V to +7.0V
DC Output Current	120 mA
Power Dissipation	1.0W

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics (Over the Operating Range, TA = -40°C to +85°C, VCC = 5.0V ± 10%)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ ⁽²⁾	Max.	Units
V _{IH}	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0			V
V _{IL}	Input LOW Voltage	Guaranteed Logic LOW Level			0.8	V
I _{IH}	Input HIGH Current	V _{CC} = Max., V _{IN} = V _{CC}			±5	µA
I _{IL}	Input LOW Current	V _{CC} = Max., V _{IN} = GND			±5	µA
I _{OZH}	High Impedance	V _{CC} = Max., V _{OUT} = 2.7 V			±10	µA
I _{OZL}	Output Current	V _{CC} = Max., V _{OUT} = 0.5 V			±10	µA
V _{IK}	Clamp Diode Voltage	V _{CC} = Min., I _{IN} = -18 mA		-0.7	-1.2	V
I _{OS}	Short Circuit Current	V _{CC} = Max. ⁽³⁾ , V _{OUT} = GND	-80	-140	-200	mA
I _O	Output Drive Current	V _{CC} = Max. ⁽³⁾ , V _{OUT} = 2.5 V	-50		-180	mA
V _H	Input Hysteresis			100		mV

PI74FCT16240T Output Drive Characteristics (Over the Operating Range)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ ⁽²⁾	Max.	Units
V _{OH}	Output HIGH Voltage	V _{CC} = Min., V _{IN} = V _{IH} or V _{IL}	I _{OH} = -3.0 mA	2.5	3.5	V
			I _{OH} = -15.0 mA	2.4	3.5	
			I _{OH} = -32.0 mA	2.0	3.0	
V _{OL}	Output LOW Voltage	V _{CC} = Min., V _{IN} = V _{IH} or V _{IL}		0.2	0.55	V
I _{OFF}	Power Down Disable	V _{CC} = 0 V, V _{IN} or V _{OUT} ≤ 4.5 V	—	—	±100	µA

PI74FCT162240T Output Drive Characteristics (Over the Operating Range)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ ⁽²⁾	Max.	Units
V _{OH}	Output HIGH Voltage	V _{CC} = Min., V _{IN} = V _{IH} or V _{IL}	2.4	3.3		V
V _{OL}	Output LOW Voltage	V _{CC} = Min., V _{IN} = V _{IH} or V _{IL}		0.3	0.55	V
I _{ODL}	Output LOW Current	V _{CC} = 5 V, V _{IN} = V _{IH} or V _{IL} , V _{OUT} = 1.5 V ⁽³⁾	60	115	150	mA
I _{ODH}	Output HIGH Current	V _{CC} = 5 V, V _{IN} = V _{IH} or V _{IL} , V _{OUT} = 1.5 V ⁽³⁾	-60	-115	-150	mA

Capacitance (TA = 25°C, f = 1 MHz)

Parameters ⁽⁴⁾	Description	Test Conditions	Typ	Max.	Units
C _{IN}	Input Capacitance	V _{IN} = 0 V	4.5	6	pF
C _{OUT}	Output Capacitance	V _{OUT} = 0 V	5.5	8	pF

Notes:

- For conditions show as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at V_{CC} = 5.0, +25°C ambient and maximum loading.
- Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- This parameter is determined by device characterization but is not production tested.

Power Supply Characteristics

Parameters	Description	Test Conditions ⁽¹⁾		Min.	Typ ⁽²⁾	Max.	Units
I _{CC}	Quiescent Power Supply Current	V _{CC} = Max.	V _{IN} = GND or V _{CC}		2	500	μA
ΔI _{CC}	Supply Current per Input @ TTL HIGH	V _{CC} = Max.	V _{IN} = 3.4 V ⁽³⁾		0.5	1.5	mA
I _{CCD}	Supply Current per Input per MHz ⁽⁴⁾	V _{CC} = Max., Outputs Open x \overline{OE} = GND One Bit Toggling 50% Duty Cycle	V _{IN} = V _{CC} V _{IN} = GND		60	100	μA/ MHz
I _C	Total Power Supply Current ⁽⁶⁾	V _{CC} = Max., Outputs Open f _i = 10 MHz 50% Duty Cycle x \overline{OE} = GND One Bit Toggling	V _{IN} = V _{CC} V _{IN} = GND		0.7	2.5 ⁽⁵⁾	mA
			V _{IN} = 3.4 V V _{IN} = GND		0.9	3.3 ⁽⁵⁾	
		V _{CC} = Max., Outputs Open f _i = 2.5 MHz 50% Duty Cycle x \overline{OE} = GND 16 Bits Toggling	V _{IN} = V _{CC} V _{IN} = GND		2.5	5.5 ⁽⁵⁾	
			V _{IN} = 3.4 V V _{IN} = GND		6.5	17.5 ⁽⁵⁾	

Notes:

- For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device.
- Typical values are at V_{CC} = 5.0 V, +25°C ambient.
- Per TTL driven input (V_{IN} = 3.4 V); all other inputs at V_{CC} or GND.
- This parameter is not directly testable, but is derived for use in Total Power Supply Calculations.
- Values for these conditions are examples of the I_{CC} formula. These limits are guaranteed but not tested.
- I_C = I_{QUIESCENT} + I_{INPUTS} + I_{DYNAMIC}

$$I_C = I_{CC} + \Delta I_{CC} D_H N_T + I_{CCD} (f_{CP}/2 + f_i N_i)$$
I_{CC} = Quiescent Current
ΔI_{CC} = Power Supply Current for a TTL High Input (V_{IN} = 3.4 V)
D_H = Duty Cycle for TTL Inputs High
N_T = Number of TTL Inputs at D_H
I_{CCD} = Dynamic Current Caused by an Input Transition Pair (HLH or LHL)
f_{CP} = Clock Frequency for Register Devices (Zero for Non-Register Devices)
f_i = Input Frequency
N_i = Number of Inputs at f_i
All currents are in milliamps and all frequencies are in megahertz.

PI74FCT16240T Switching Characteristics over Operating Range

Preliminary

Parameters	Description	Conditions ⁽¹⁾	'16240T		'16240AT		'16240CT		'16240DT		'16240ET		Unit
			Com.		Com.		Com.		Com.		Com.		
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
TP _{LH}	Propagation Delay xAX to xYx	C _L = 50 pF R _L = 500Ω	1.5	8.0	1.5	4.8	1.5	4.3	1.5	3.6	1.5	3.2	ns
TP _{HL}			1.5	10.0	1.5	6.2	1.5	5.8	1.5	4.8	1.5	4.4	ns
TP _{ZH}	Output Enable Time		1.5	9.5	1.5	5.6	1.5	5.2	1.5	4.0	1.5	3.6	ns
TP _{ZL}			—	0.5	—	0.5	—	0.5	—	0.5	—	0.5	ns
TP _{HZ}	Output Disable Time		—	0.5	—	0.5	—	0.5	—	0.5	—	0.5	ns
TP _{LZ}			—	0.5	—	0.5	—	0.5	—	0.5	—	0.5	ns
TSK(o)	Output Skew ⁽³⁾	—	0.5	—	0.5	—	0.5	—	0.5	—	0.5	ns	

4

PI74FCT162240T Switching Characteristics over Operating Range

Preliminary

Parameters	Description	Conditions ⁽¹⁾	'162240T		'162240AT		'162240CT		'162240DT		'162240ET		Unit
			Com.		Com.		Com.		Com.		Com.		
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
TP _{LH}	Propagation Delay xAX to xYx	C _L = 50 pF R _L = 500Ω	1.5	8.0	1.5	4.8	1.5	4.3	1.5	3.6	1.5	3.2	ns
TP _{HL}			1.5	10.0	1.5	6.2	1.5	5.8	1.5	4.8	1.5	4.4	ns
TP _{ZH}	Output Enable Time		1.5	9.5	1.5	5.6	1.5	5.2	1.5	4.0	1.5	3.6	ns
TP _{ZL}			—	0.5	—	0.5	—	0.5	—	0.5	—	0.5	ns
TP _{HZ}	Output Disable Time		—	0.5	—	0.5	—	0.5	—	0.5	—	0.5	ns
TP _{LZ}			—	0.5	—	0.5	—	0.5	—	0.5	—	0.5	ns
TSK(o)	Output Skew ⁽³⁾	—	0.5	—	0.5	—	0.5	—	0.5	—	0.5	ns	

Notes:

1. See test circuit and wave forms.
2. Minimum limits are guaranteed but not tested on Propagation Delays.
3. Skew between any two outputs, of the same package, switching in the same direction. This parameter is guaranteed by design.