
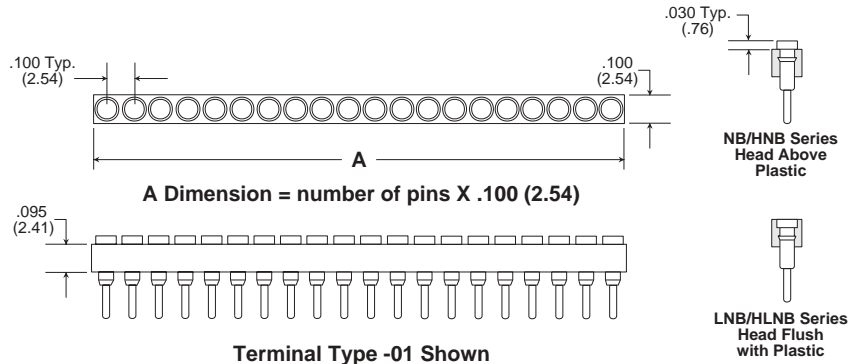


Single In-Line Solid Socket Strips

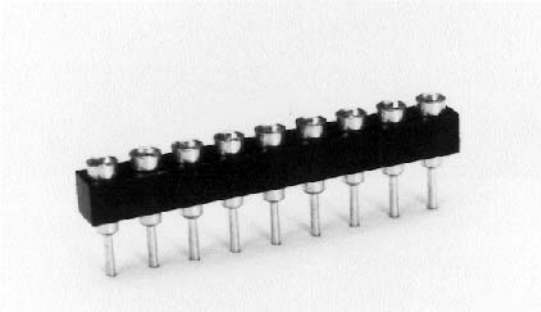

Features:

- Molded in lengths 3 - 20, 30 & 32. For other lengths consult factory.
- Board to board stackable.
- .100" (2.54 mm) pin to pin spacing.
- Multiple finger contacts for reliability.
- Tapered entry for ease of insertion.
- Closed bottom sleeve for 100% anti-wicking of solder.

Terminals and Contacts:

Terminal: Brass - Copper Alloy (C36000), ASTM-B-16

Contact: Beryllium Copper - Copper Alloy (C17200), ASTM-B-194

Solder Preform:

63% Tin, 37% Lead

Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel


Contact: Gold over Nickel or Tin-Lead over Nickel

Body Material:


NB/LNB - Glass Filled Thermoplastic Polyester (P.B.T.) U.L. Rated 94V-O, -60°C to 140°C (-76°F to 284°F)

HNB/HLNB - High temp. Glass Filled Thermoplastic, U.L. Rated 94V-O, -60°C to 260°C (-76°F to 500°F)

How To Order

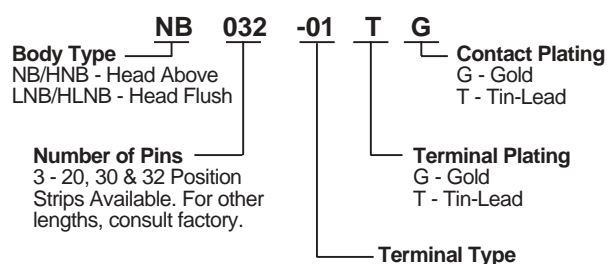

Terminal Information

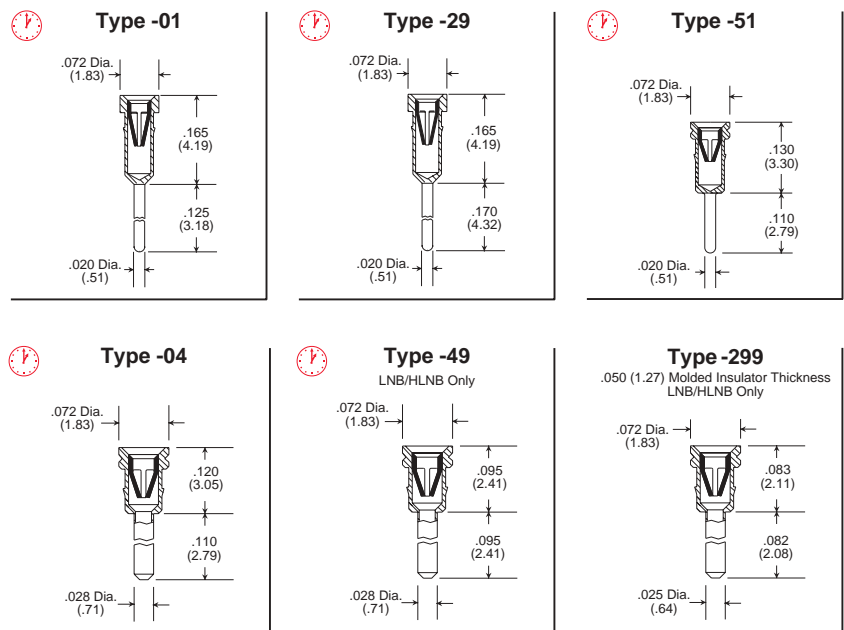

 Quick turn delivery available on standard terminal types.

Additional terminal types available.
See terminal section for detailed terminal information.

