

GD54/74S00

QUADRUPLE 2-INPUT POSITIVE NAND GATES


Description

This device contains four independent 2-input NAND gates. It performs the Boolean functions $Y=A \cdot B$ or $Y=\overline{A}+\overline{B}$ in positive logic.

Function Table (each gate)


INPUTS		OUTPUT
A	B	Y
H	H	L
L	X	H
X	L	H

Pin Configuration

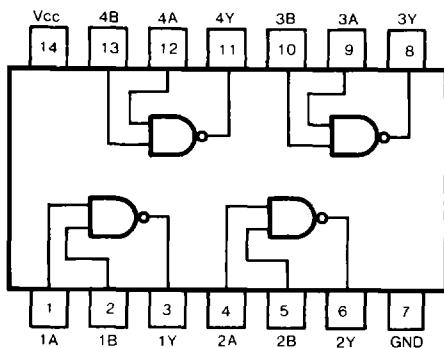

Suffix-Blank: Plastic Dual In Line Package
Suffix-J : Ceramic Dual In Line Package

Schematics (Each Gate)

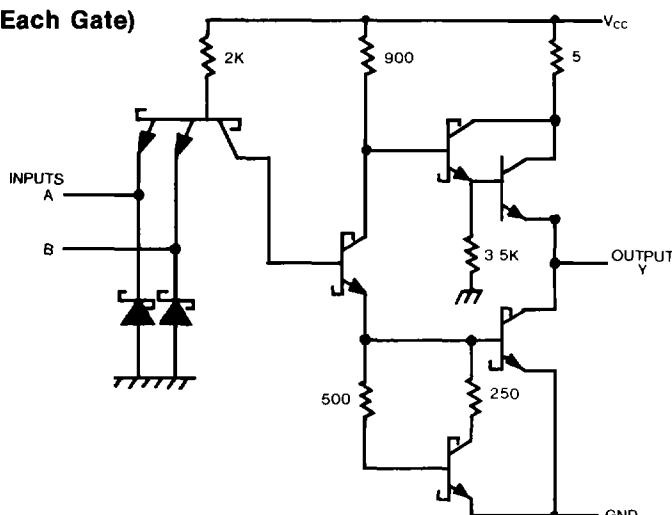

Absolute Maximum Ratings

- Supply voltage, V_{CC} 7V
- Input voltage 5.5V
- Operating free-air temperature range 54LS $-55^{\circ}C$ to $125^{\circ}C$
74LS $0^{\circ}C$ to $70^{\circ}C$
- Storage temperature range $-65^{\circ}C$ to $150^{\circ}C$

Recommended Operating Conditions

SYMBOL	PARAMETER	MIN	NOM	MAX	UNIT
V_{CC}	Supply voltage	54	4.5	5	5.5
		74	4.75	5	5.25
I_{OH}	High-level output current			-1	mA
I_{OL}	Low-level output current			20	mA
T_A	Operating free-air temperature	54	-55	125	°C
		74	0	70	

Electrical Characteristics over recommended operating free-air temperature range (unless otherwise noted)

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP (Note 1)	MAX	UNIT
V_{IH}	High-level input voltage		2			V
V_{IL}	Low-level input voltage		54		0.8	V
			74		0.8	
V_{IK}	Input clamp voltage	$V_{CC} = \text{Min.}$, $I_i = -18\text{mA}$			-1.2	V
V_{OH}	High-level output voltage	$V_{CC} = \text{Min.}$, $V_{IL} = \text{Max}$ $I_{OH} = \text{Max.}$	54	2.5	3.4	V
			74	2.7	3.4	
V_{OL}	Low-level output voltage	$V_{CC} = \text{Min.}$, $I_{OL} = \text{Max.}$, $V_{IH} = \text{Min}$			0.5	V
I_i	Input current at maximum input voltage	$V_{CC} = \text{Max.}$, $V_i = 5.5\text{V}$			1	mA
I_{IH}	High-level input current	$V_{CC} = \text{Max.}$, $V_i = 2.7\text{V}$			50	μA
I_{IL}	Low-level input current	$V_{CC} = \text{Max.}$, $V_i = 0.5\text{V}$			-2	mA
I_{os}	Short-circuit output current	$V_{CC} = \text{Max}$ (Note 2)	-40		-100	mA
I_{ccH}	Supply current	Total with outputs high	$V_{CC} = \text{Max}$		10	mA
I_{ccL}		Total with outputs low	$V_{CC} = \text{Max}$		20	mA

Note 1 All typical values are at $V_{CC} = 5\text{V}$, $T_A = 25^\circ\text{C}$

Note 2 Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second

Switching Characteristics, $V_{CC} = 5\text{V}$, $T_A = 25^\circ\text{C}$

SYMBOL	PARAMETER	TEST CONDITION#	MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time, low-to-high-level output	$C_L = 15\text{pF}$, $R_L = 280\Omega$		3	4.5	ns
t_{PHL}	Propagation delay time, high-to-low-level output			3	5	

#For load circuit and voltage waveforms, see page 3-12