



**MOTOROLA**

**TYPES SN54ALS11, SN74ALS11  
TRIPLE 3-INPUT POSITIVE-AND GATES**

4/30

000213


USS 1701/1230

**description**

These devices contain three independent 3-input AND gates. They perform the boolean functions  $Y = A \cdot B \cdot C$  or  $Y = \overline{A + B + C}$  in positive logic.

The SN54ALS11 is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74ALS11 is characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

(TOP VIEW)

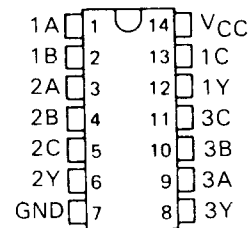


J Suffix—Case 632-07 (Ceramic)

N Suffix—Case 646-05 (Plastic)

FUNCTION TABLE (each gate)

INPUTS			OUTPUT
A	B	C	Y
H	H	H	H
L	X	X	L
X	L	X	L
X	X	L	L

**logic symbol**

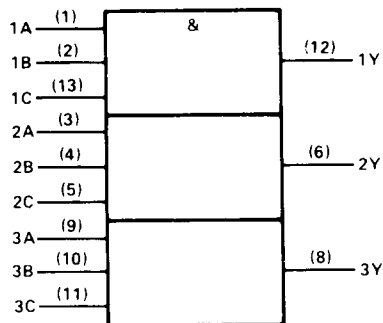

Pin numbers shown are for J and N packages.

Motorola reserves the right to make changes to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

Portions of this data sheet are reprinted with permission from the Texas Instruments 1983 ALS/AS Logic Circuits Data Book.

# TYPES SN54ALS11, SN74ALS11

## TRIPLE 3-INPUT POSITIVE-AND GATES

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, $V_{CC}$	7 V
Input voltage	7 V
Operating free-air temperature range: SN54ALS11	-55 °C to 125 °C
SN74ALS11	0 °C to 70 °C
Storage temperature range	-65 °C to 150 °C

recommended operating conditions

	SN54ALS11			SN74ALS11			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
$V_{CC}$ Supply voltage	4.5	5	5.5	4.5	5	5.5	V
$V_{IH}$ High-level input voltage	2			2			V
$V_{IL}$ Low-level input voltage			0.8			0.8	V
$I_{OH}$ High-level output current			-0.4			-0.4	mA
$I_{OL}$ Low-level output current			4			8	mA
$T_A$ Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS		SN54ALS11			SN74ALS11			UNIT
			MIN	TYP†	MAX	MIN	TYP†	MAX	
$V_{IK}$	$V_{CC} = 4.5 V$	$I_I = -18 mA$			-1.5			-1.5	V
$V_{OH}$	$V_{CC} = 4.5 V$	$I_{OH} = -0.4 mA$	2.5	3.4		2.5			V
	$V_{CC} = 4.75 V$	$I_{OH} = -0.4 mA$				2.7	3.4		
$V_{OL}$	$V_{CC} = 4.5 V$	$I_{OL} = 4 mA$		0.25	0.4		0.25	0.4	V
	$V_{CC} = 4.75 V$	$I_{OL} = 8 mA$					0.35	0.5	
$I_I$	$V_{CC} = 5.5 V$	$V_I = 7 V$			0.1			0.1	mA
$I_{IH}$	$V_{CC} = 5.5 V$	$V_I = 2.7 V$			20			20	μA
$I_{IL}$	$V_{CC} = 5.5 V$	$V_I = 0.4 V$			-0.1			-0.1	mA
$I_{OS}^*$	$V_{CC} = 5.5 V$	$V_O = GND$	-25		-150	-25		-150	mA
$I_{CCH}$	$V_{CC} = 5.5 V$	$V_I = 4.5 V$			1.8			1.8	mA
$I_{CCL}$	$V_{CC} = 5.5 V$	$V_I = 0 V$			3.3			3.3	mA

†All typical values are at  $V_{CC} = 5 V$ ,  $T_A = 25 °C$ .

\*The current produced by grounding the outputs is approximately twice that produced with 2.25 V on the outputs.

switching characteristics

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5 V$ , $C_L = 15 pF$ , $R_L = 500 \Omega$ , $T_A = 25 °C$		$V_{CC} = 4.5 V$ to $5.5 V$ , $C_L = 50 pF$ , $R_L = 500 \Omega$ , $T_A = MIN$ to $MAX$		UNIT	
			ALS11	SN54ALS11	SN74ALS11			
			TYP	MIN	MAX	MIN		MAX
$t_{PLH}$	Any	Y	12	5	23	5	20	ns
$t_{PHL}$	Any	Y	6	3	13	3	13	ns



**MOTOROLA Semiconductor Products Inc.**

PO. BOX 20912 • PHOENIX, ARIZONA 85036 • A SUBSIDIARY OF MOTOROLA INC.