


SN74BCT29827A, SN74BCT29828A 10-BIT BUFFERS AND BUS DRIVERS WITH 3-STATE OUTPUTS

D2977, APRIL 1987—REVISED JULY 1989

- **BICMOS Design Substantially Reduces Standby Current**
- **Functionally Equivalent to Am29827, Am29828, SN74ALS29827, and SN74ALS29828**
- **3-State Outputs Drive Bus Lines or Buffer Memory Address Registers**
- **P-N-P Inputs Reduce DC Loading**
- **Data Flow-Thru Pinout (All Inputs on Opposite Side from Outputs)**
- **Power-Up High-Impedance State**
- **Package Options Include Plastic and Ceramic DIPs**
- **BICMOS Process with TTL Inputs and Outputs**
- **Dependable Texas Instruments Quality and Reliability**

DW OR NT PACKAGE
(TOP VIEW)



2

BICMOS Circuits

description

These 10-bit buffers and bus drivers provide high-performance bus interface for wide data paths or buses carrying parity.

The 3-state control gate is a 2-input positive NOR gate so if either $\bar{G}1$ or $\bar{G}2$ is high, all 10 outputs are in the high-impedance state. The outputs are also in the high-impedance state during power-up and power-down conditions. The outputs remain in the high-impedance state while the device is powered-down.

The SN74BCT29827A provides true data and the SN74BCT29828A provides inverted data at the outputs.

The SN74BCT29827A and SN74BCT29828A are characterized for operation from 0°C to 70°C.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


Copyright © 1989, Texas Instruments Incorporated

TEXAS
INSTRUMENTS

POST OFFICE BOX 855303 • DALLAS, TEXAS 75285


SN74BCT29827A, SN74BCT29828A
10-BIT BUFFERS AND BUS DRIVERS WITH 3-STATE OUTPUTS

logic symbols†

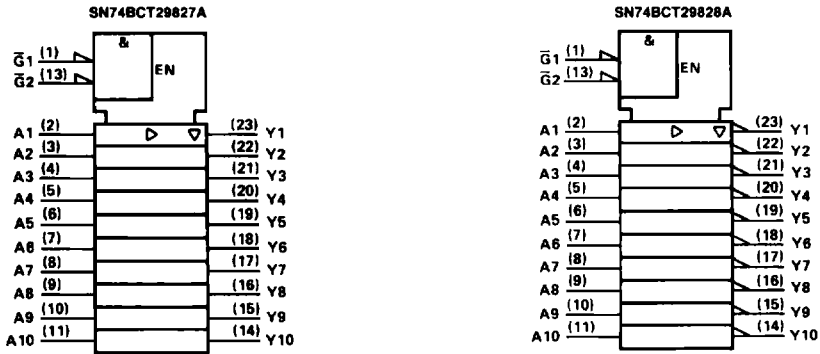

†These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagrams (positive logic)

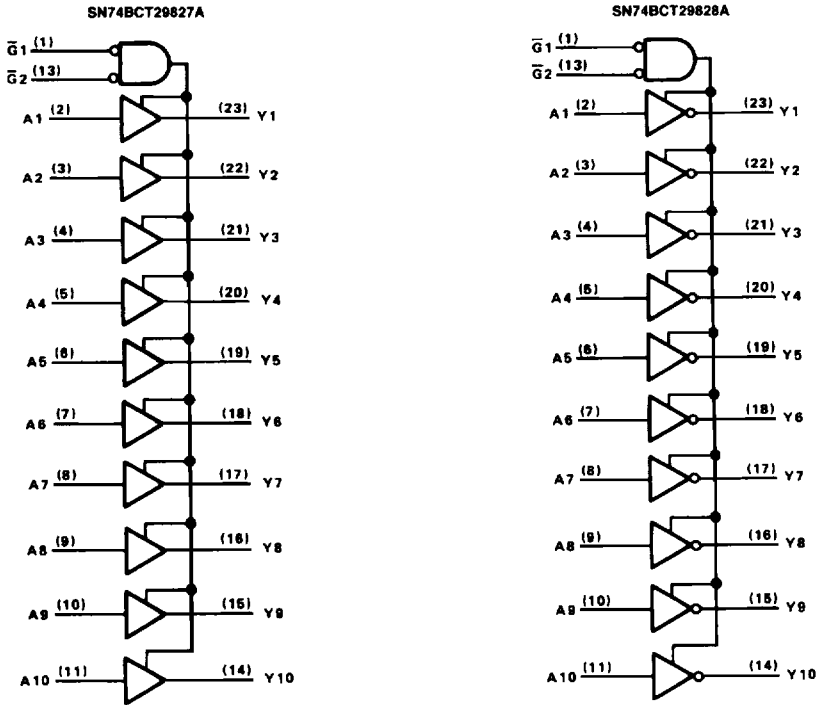

SN74BCT29827A

10-BIT BUFFERS AND BUS DRIVERS WITH 3-STATE OUTPUTS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage (all inputs and I/O ports)	5.5 V
Operating free-air temperature range	0°C to 70°C
Storage temperature range	-65°C to 150°C

recommended operating conditions

	MIN	NOM	MAX	UNIT
V_{CC} Supply voltage	4.5	5	5.5	V
V_{IH} High-level input voltage	2			V
V_{IL} Low-level input voltage			0.8	V
I_{OH} High-level output current			-24	mA
I_{OL} Low-level output current			48	mA
T_A Operating free-air temperature	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	MIN	TYP‡	MAX	UNIT
V_{IK}	$V_{CC} = \text{MIN}$, $I_I = -18 \text{ mA}$			-1.2	V
V_{OH}	$V_{CC} = \text{MIN}$, $I_{OH} = -15 \text{ mA}$	2.4			V
	$V_{CC} = \text{MIN}$, $I_{OH} = -24 \text{ mA}$	2			
V_{OL}	$V_{CC} = \text{MIN}$, $I_{OL} = 48 \text{ mA}$		0.35	0.5	V
I_{OZH}	$V_{CC} = \text{MAX}$, $V_O = 2.7 \text{ V}$			20	μA
I_{OZL}	$V_{CC} = \text{MAX}$, $V_O = 0.4 \text{ V}$			-20	μA
I_I	$V_{CC} = \text{MAX}$, $V_I = 5.5 \text{ V}$			0.1	mA
I_{IH}	$V_{CC} = \text{MAX}$, $V_I = 2.7 \text{ V}$			20	μA
I_{IL}	$V_{CC} = \text{MAX}$, $V_I = 0.4 \text{ V}$			-0.2	mA
I_{OS}^\S	$V_{CC} = \text{MAX}$, $V_O = 0$	-75		-250	mA
I_{CCL}	$V_{CC} = \text{MAX}$, Outputs open		28	40	mA
I_{CCZ}	$V_{CC} = \text{MAX}$, Outputs open		3.5	6	mA

† For conditions shown as MIN or MAX, use appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

§ Not more than one output should be shorted at a time and duration of the short circuit should not exceed 1 second.

switching characteristics (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5 \text{ V}$, $C_L = 50 \text{ pF}$, $R_1 = 500 \Omega$, $R_2 = 500 \Omega$, $T_A = 25^\circ\text{C}$			$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$, $C_L = 50 \text{ pF}$, $R_1 = 500 \Omega$, $R_2 = 500 \Omega$, $T_A = \text{MIN to MAX}$		UNIT
			MIN	TYP	MAX	MIN	MAX	
t_{PLH}	A	Y	1	3.5	6	1	7	ns
t_{PHL}			1	5	7	1	9	
t_{PZH}	\bar{G}	Y	2	7	10	2	12	ns
t_{PZL}			2	10	13	2	15	
t_{PHZ}	\bar{G}	Y	2	7	10	2	12	ns
t_{PLZ}			2	7	10	2	12	

SN74BCT29828A
10-BIT BUFFERS AND BUS DRIVERS WITH 3-STATE OUTPUTS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage (all inputs and I/O ports)	5.5 V
Operating free-air temperature range	0°C to 70°C
Storage temperature range	-65°C to 150°C

recommended operating conditions

	MIN	NOM	MAX	UNIT
V_{CC} Supply voltage	4.5	5	5.5	V
V_{IH} High-level input voltage	2			V
V_{IL} Low-level input voltage			0.8	V
I_{OH} High-level output current			-24	mA
I_{OL} Low-level output current			48	mA
T_A Operating free-air temperature	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS [†]	MIN	TYP [‡]	MAX	UNIT
V_{IK}	$V_{CC} = \text{MIN}$, $I_I = -18 \text{ mA}$			-1.2	V
V_{OH}	$V_{CC} = \text{MIN}$	$I_{OH} = -15 \text{ mA}$	2.4		V
		$I_{OH} = -24 \text{ mA}$	2		
V_{OL}	$V_{CC} = \text{MIN}$, $I_{OL} = 48 \text{ mA}$		0.35	0.5	V
I_{OZH}	$V_{CC} = \text{MAX}$, $V_O = 2.7 \text{ V}$			20	μA
I_{OZL}	$V_{CC} = \text{MAX}$, $V_O = 0.4 \text{ V}$			20	μA
I_I	$V_{CC} = \text{MAX}$, $V_I = 5.5 \text{ V}$			0.1	mA
I_{IH}	$V_{CC} = \text{MAX}$, $V_I = 2.7 \text{ V}$			20	μA
I_{IL}	$V_{CC} = \text{MAX}$, $V_I = 0.4 \text{ V}$			-0.2	mA
I_{OS}^{\S}	$V_{CC} = \text{MAX}$, $V_O = 0$	-75		-250	mA
I_{CCL}	$V_{CC} = \text{MAX}$, Outputs open		28	40	mA
I_{CCZ}	$V_{CC} = \text{MAX}$, Outputs open		3.5	6.5	mA

[†] For conditions shown as MIN or MAX, use appropriate value specified under recommended operating conditions.

[‡] All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

[§] Not more than one output should be shorted at a time and duration of the short circuit should not exceed 1 second.

switching characteristics (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5 \text{ V}$, $C_L = 50 \text{ pF}$, $R_1 = 500 \Omega$, $R_2 = 500 \Omega$, $T_A = 25^\circ\text{C}$			$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$, $C_L = 50 \text{ pF}$, $R_1 = 500 \Omega$, $R_2 = 500 \Omega$, $T_A = \text{MIN to MAX}$		UNIT
			MIN	TYP	MAX	MIN	MAX	
t_{PLH}	A	Y	1	3.5	6	1	7	ns
t_{PHL}			1	3.5	6	1	7	
t_{PZH}	\bar{C}	Y	2	7	9	2	11	ns
t_{PZL}			2	9	13	2	15	
t_{PHZ}	\bar{C}	Y	2	6	9	2	10	ns
t_{PLZ}			2	6	10	2	11	


2

BiCMOS Circuits



SN74BCT29827A, SN74BCT29828A
10-BIT BUFFERS AND BUS DRIVERS WITH 3-STATE OUTPUTS


PARAMETER MEASUREMENT INFORMATION

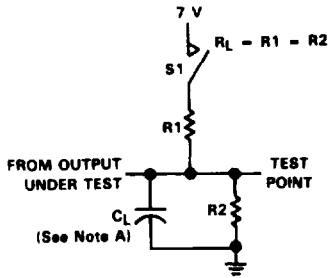


SWITCH POSITION TABLE

TEST	S1
t_{PLH}	Open
t_{PHL}	Open
t_{PZH}	Open
t_{PZL}	Closed
t_{PHZ}	Open
t_{PLZ}	Closed


LOAD CIRCUIT




**VOLTAGE WAVEFORMS
 SETUP AND HOLD TIMES**

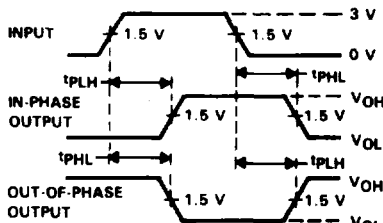

**VOLTAGE WAVEFORMS
 PROPAGATION DELAY TIMES**

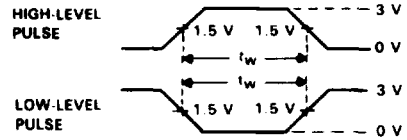

**VOLTAGE WAVEFORMS
 PULSE DURATIONS**

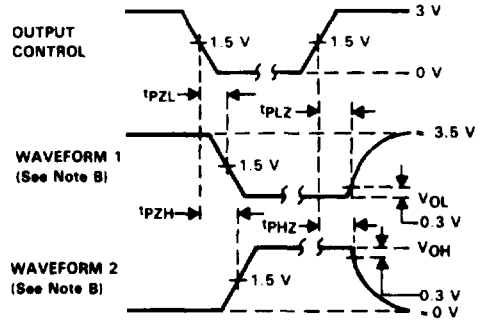

**VOLTAGE WAVEFORMS
 ENABLE AND DISABLE TIMES, THREE-STATE OUTPUTS**

- NOTES: A. C_L includes probe and jig capacitance.
 B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.
 Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 C. All input pulses are supplied by generators having the following characteristics: PRR \leq 10 MHz, $Z_O = 50 \Omega$, $t_r \leq 2.5$ ns, $t_f \leq 2.5$ ns.

FIGURE 1. SWITCHING CHARACTERISTICS