

SN54ALS880A, SN54AS880, SN74ALS880A, SN74AS880 DUAL 4-BIT D-TYPE LATCHES WITH 3-STATE OUTPUTS

D2661, DECEMBER 1982 — REVISED MAY 1986

- 3-State Buffer-Type Outputs Drive Bus-Lines Directly
- Bus-Structured Pinout
- 'ALS873B is Alternative Version with Noninverting Outputs
- Package Options Include Plastic "Small Outline" Packages, Both Plastic and Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability

description


These dual 4-bit registers feature three-state outputs designed specifically for bus driving. This makes these devices particularly suitable for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

The dual 4-bit latches are transparent D-type. When the latch enable input (1C or 2C) is high, the \bar{Q} outputs will follow the data (D) inputs in inverted form, according to the function table. When the latch enable input is taken low, the outputs will be latched. When PRE goes low, the \bar{Q} outputs go low independently of the clock. The outputs are in a high-impedance state when \bar{OC} (output control) is at a high logic level.

The SN54ALS880A and SN54AS880 are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ALS880A and SN74AS880 are characterized for operation from 0°C to 70°C .


SN54ALS880A, SN54AS880 . . . JT PACKAGE
SN74ALS880A, SN74AS880 . . . DW OR NT PACKAGE

(TOP VIEW)

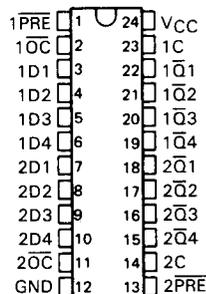

SN54ALS880A, SN54AS880 . . . FK PACKAGE
SN74ALS880A, SN74AS880 . . . FN PACKAGE

(TOP VIEW)

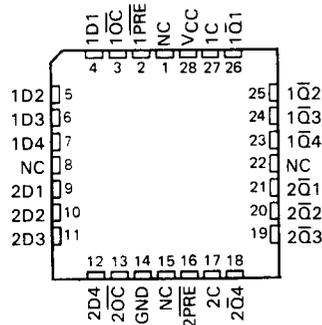

NC—No internal connection

FUNCTION TABLES (EACH LATCH)

INPUTS				OUTPUT
\bar{OC}	PRE	ENABLE C	D	\bar{Q}
L	L	X	X	L
L	H	H	H	L
L	H	H	L	H
L	H	L	X	\bar{Q}_0
H	X	X	X	Z

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**


POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

Copyright © 1982, Texas Instruments Incorporated

SN54ALS880A, SN74AS880, SN74ALS880A, SN74AS880


DUAL 4-BIT D-TYPE LATCHES WITH 3-STATE OUTPUTS

logic symbol†

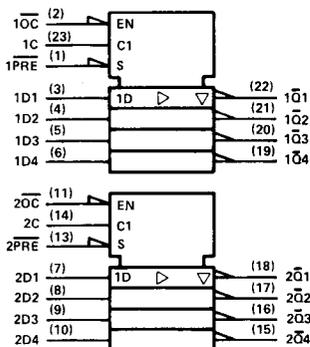

†This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for DW, JT, and NT packages.

logic diagram (each quad latch, positive logic)

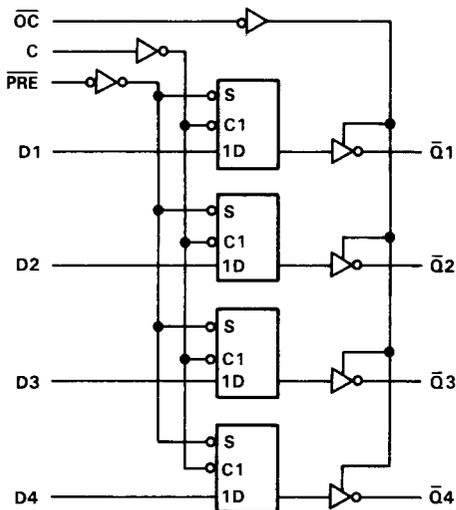

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Voltage applied to a disabled 3-state output	5.5 V
Operating free-air temperature range: SN54ALS880A, SN54AS880	-55°C to 125°C
SN74ALS880A, SN74AS880	0°C to 70°C
Storage temperature range	-65°C to 150°C

SN54ALS880A, SN74ALS880A DUAL 4-BIT D-TYPE LATCHES WITH 3-STATE OUTPUTS

recommended operating conditions

	SN54ALS880A			SN74ALS880A			UNIT	
	MIN	NOM	MAX	MIN	NOM	MAX		
V _{CC}	Supply voltage							V
V _{IH}	High-level input voltage							V
V _{IL}	Low-level input voltage							V
I _{OH}	High-level output current							mA
I _{OL}	Low-level output current							mA
t _w	Pulse duration	PRE low	15		15		ns	
		Enable C high	15		15			
t _{su}	Setup time, data before enable C↓							ns
t _h	Hold time, data after enable C↓							ns
T _A	Operating free-air temperature							°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54ALS880A		SN74ALS880A		UNIT
		MIN	TYP [†]	MAX	MIN	
V _{IK}	V _{CC} = 4.5 V, I _I = -18 mA			-1.2		V
V _{OH}	V _{CC} = 4.5 V to 5.5 V, I _{OH} = -0.4 mA	V _{CC} -2		V _{CC} -2		V
	V _{CC} = 4.5 V, I _{OH} = -1 mA	2.4 3.3				
	V _{CC} = 4.5 V, I _{OH} = -2.6 mA			2.4 3.2		
V _{OL}	V _{CC} = 4.5 V, I _{OL} = 12 mA	0.25 0.4		0.25 0.4		V
	V _{CC} = 4.5 V, I _{OL} = 24 mA			0.35 0.5		
I _{OZH}	V _{CC} = 5.5 V, V _O = 2.7 V			20		μA
I _{OZL}	V _{CC} = 5.5 V, V _O = 0.4 V			-20		μA
I _I	V _{CC} = 5.5 V, V _I = 7 V			0.1		mA
I _{IH}	V _{CC} = 5.5 V, V _I = 2.7 V			20		μA
I _{IL}	V _{CC} = 5.5 V, V _I = 0.4 V			-0.2		mA
I _{O[‡]}	V _{CC} = 5.5 V, V _O = 2.25 V	-30		-112		mA
I _{CC}	V _{CC} = 5.5 V	Outputs high		14 21		mA
		Outputs low		19 29		
		Outputs disabled		20 31		

[†] All typical values are at V_{CC} = 5 V, T_A = 25°C.

[‡] The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS}.

2

ALS and AS Circuits



SN54ALS880A, SN74ALS880A
DUAL 4-BIT D-TYPE LATCHES WITH 3-STATE OUTPUTS

switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 5 V C _L = 50 pF, R ₁ = 500 Ω, R ₂ = 500 Ω, T _A = 25 °C			V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R ₁ = 500 Ω, R ₂ = 500 Ω, T _A = MIN to MAX			UNIT	
			ALS880A			SN54ALS880A		SN74ALS880A		
			MIN	TYP	MAX	MIN	MAX	MIN		MAX
t _{PLH}	D	\bar{Q}	14	19	3	23	3	20	ns	
t _{PHL}			9	12	3	15	3	14		
t _{PLH}	C	\bar{Q}	17	22	8	31	8	24	ns	
t _{PHL}			14	18	8	22	8	21		
t _{PHL}	\overline{PRE}	\bar{Q}	12	16	6	24	6	21	ns	
t _{PZH}	\overline{OC}	\bar{Q}	12	15	4	21	4	18	ns	
t _{PZL}			13	17	4	21	4	18		
t _{PHZ}	\overline{OC}	\bar{Q}	6	9	2	12	2	10	ns	
t _{PLZ}			8	11	3	21	3	17		

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.

2
ALS and AS Circuits

SN54AS880, SN74AS880 DUAL 4-BIT D-TYPE LATCHES WITH 3-STATE OUTPUTS

recommended operating conditions

		SN54AS880			SN74AS880			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High-level input voltage	2			2			V
V _{IL}	Low-level input voltage				0.8			V
I _{OH}	High-level output current				-12			mA
I _{OL}	Low-level output current				32			mA
t _w	Pulse duration	PRE low			3.5			ns
		Enable C high			2.5			
t _{su}	Setup time, data before enable C↓	2			2			ns
t _h	Hold time, data after enable C↓	1			1			ns
T _A	Operating free-air temperature	-55			125			°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54AS880			SN74AS880			UNIT
		MIN	TYP†	MAX	MIN	TYP†	MAX	
V _{IK}	V _{CC} = 4.5 V, I _I = -18 mA	-1.2			-1.2			V
V _{OH}	V _{CC} = 4.5 V to 5.5 V, I _{OH} = -2 mA	V _{CC} - 2			V _{CC} - 2			V
	V _{CC} = 4.5 V, I _{OH} = -12 mA	2.4	3.2					
	V _{CC} = 4.5 V, I _{OH} = -15 mA				2.4	3.3		
V _{OL}	V _{CC} = 4.5 V, I _{OL} = 32 mA	0.30			0.5			V
	V _{CC} = 4.5 V, I _{OL} = 48 mA				0.35	0.5		
I _{OZH}	V _{CC} = 5.5 V, V _O = 2.7 V				50			μA
I _{OZL}	V _{CC} = 5.5 V, V _O = 0.4 V				-50			μA
I _I	V _{CC} = 5.5 V, V _I = 7 V				0.1			mA
I _{IH}	V _{CC} = 5.5 V, V _I = 2.7 V				20			μA
I _{IL}	V _{CC} = 5.5 V, V _I = 0.4 V				-0.5			mA
I _O ‡	V _{CC} = 5.5 V, V _O = 2.25 V	-30		-112	-30		-112	mA
I _{CC}	V _{CC} = 5.5 V	Outputs high		73	118	73	118	mA
		Outputs low		76	122	76	122	
		Outputs disabled		86	137	86	137	

† All typical values are at V_{CC} = 5 V, T_A = 25°C.

‡ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{O5}.

2
ALS and AS Circuits

SN54AS880, SN74AS880
DUAL 4-BIT D-TYPE LATCHES WITH 3-STATE OUTPUTS

switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega,$ $R_2 = 500 \Omega,$ $T_A = \text{MIN to MAX}$				UNIT
			SN54AS880		SN74AS880		
			MIN	MAX	MIN	MAX	
t_{PLH}	D	\bar{Q}	4	11	4	9.5	ns
t_{PHL}			4	9	4	8.5	
t_{PLH}	C	\bar{Q}	6	14	6	11.5	ns
t_{PHL}			4	10	4	8	
t_{PHL}	\overline{PRE}	\bar{Q}	4	11.5	4	10	ns
t_{PZH}	\overline{OC}	\bar{Q}	2	8	2	7.5	ns
t_{PZL}			4	11	4	10	
t_{PHZ}	\overline{OC}	\bar{Q}	2	8	2	6.5	ns
t_{PLZ}			2	9	2	8	

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.

2

ALS and AS Circuits