

# TYPES SN54ALS1240, SN54ALS1241, SN74ALS1240, SN74ALS1241 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS

D2661, DECEMBER 1982 - REVISED DECEMBER 1983

- Low-Power Version of 'ALS240 and 'ALS241
- 3-State Outputs Drive Bus Lines or Buffer Memory Address Registers
- P-N-P Inputs Reduce DC Loading
- Dependable Texas Instruments Quality and Reliability


## description

These octal buffers and line drivers are designed specifically to improve both the performance and density of three-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters. The designer has a choice of selected combinations of inverting and non-inverting outputs, symmetrical  $\bar{G}$  (active-low output control) inputs, and complementary  $G$  and  $\bar{G}$  inputs. These devices feature high fan-out and improved fan-in.


The -1 versions of the SN64ALS' parts are identical to the standard versions except that the recommended maximum  $I_{OL}$  is increased to 24 milliamperes. There are no -1 versions of the SN54ALS' parts.

The SN54ALS1240 and SN54ALS1241 are characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74ALS1240 and SN74ALS1241 are characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

SN54ALS1240, SN54ALS1241 ... J PACKAGE  
SN74ALS1240, SN74ALS1241 ... N PACKAGE  
(TOP VIEW)




SN54ALS1240, SN54ALS1241 ... FH PACKAGE  
SN74ALS1240, SN74ALS1241 ... FN PACKAGE  
(TOP VIEW)

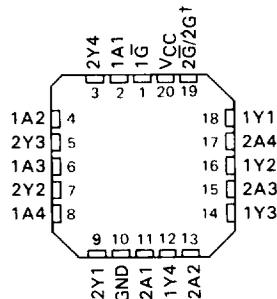

$\dagger 2\bar{G}$  for 'ALS1240 or 2G for 'ALS1241

**TYPES SN54ALS1240, SN54ALS1241, SN74ALS1240, SN74ALS1241**  
**OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

logic symbols

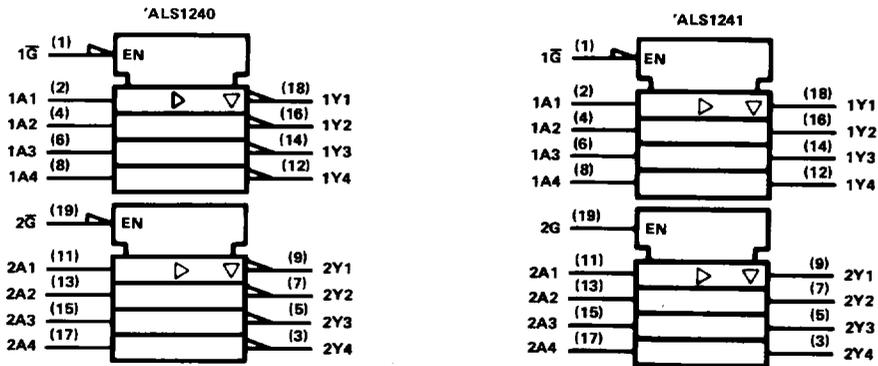


Pin numbers shown are for J and N packages.

functional block diagrams (positive logic)

**2**

**ALS AND AS CIRCUITS**

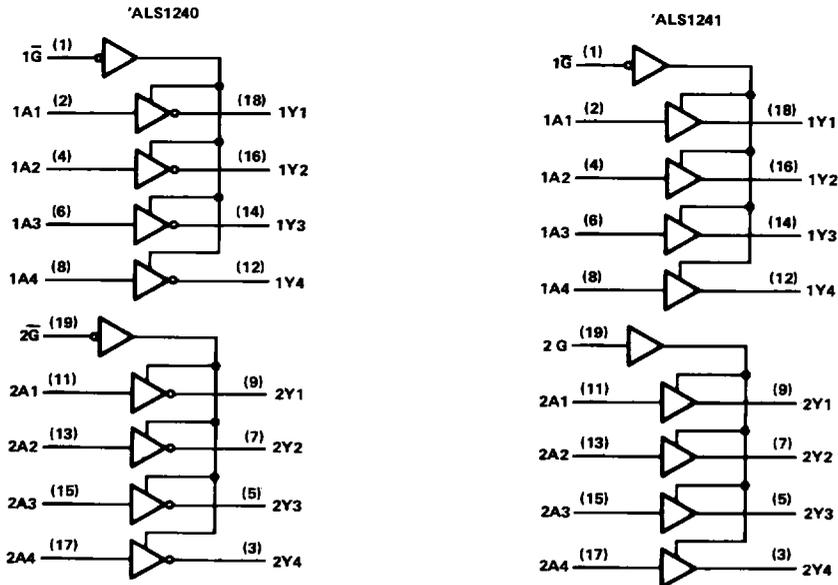

# TYPES SN54ALS1240, SN54ALS1241, SN74ALS1240, SN74ALS1241 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, $V_{CC}$	7 V
Input voltage	7 V
Voltage applied to a disabled 3-state output	5.5 V
Operating free-air temperature range: SN54ALS1240, SN54ALS1241	-55 °C to 125 °C
SN74ALS1240, SN74ALS1241	0 °C to 70 °C
Storage temperature range	-65 °C to 150 °C

recommended operating conditions

		SN54ALS1240 SN54ALS1241			SN74ALS1240 SN74ALS1241			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
		$V_{CC}$	Supply voltage	4.5	5	5.5	4.5	
$V_{IH}$	High-level input voltage	2			2			V
$V_{IL}$	Low-level input voltage	0.8			0.8			V
$I_{OH}$	High-level output current	-12			-15			mA
$I_{OL}$	Low-level output current	8			16			mA
					24 <sup>†</sup>			
$T_A$	Operating free-air temperature	-55	125		0	70		°C

<sup>†</sup>The extended limits apply only if  $V_{CC}$  is maintained between 4.75 V and 5.25 V.

The 24-mA limit applies for the SN74ALS1240-1 and SN74ALS1241-1 only.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54ALS1240 SN54ALS1241			SN74ALS1240 SN74ALS1241			UNIT
		MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	
		$V_{IK}$	$V_{CC} = 4.5 \text{ V}$ , $I_I = -18 \text{ mA}$	-1.5			-1.5	
$V_{OH}$	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$ , $I_{OH} = -0.4 \text{ mA}$	$V_{CC} - 2$		3	$V_{CC} - 2$		V	
	$V_{CC} = 4.5 \text{ V}$ , $I_{OH} = -3 \text{ mA}$	2.4	3.2	2.4	3.2			
	$V_{CC} = 4.5 \text{ V}$ , $I_{OH} = -12 \text{ mA}$	2						
	$V_{CC} = 4.5 \text{ V}$ , $I_{OH} = -15 \text{ mA}$				2			
$V_{OL}$	$V_{CC} = 4.5 \text{ V}$ , $I_{OL} = 8 \text{ mA}$	0.25		0.4	0.25		0.4	V
	$V_{CC} = 4.5 \text{ V}$ , $I_{OL} = 16 \text{ mA}$ ( $I_{OL} = 24 \text{ mA}$ for -1 versions)				0.35		0.5	
$I_{OZH}$	$V_{CC} = 5.5 \text{ V}$ , $V_O = 2.7 \text{ V}$	20			20			$\mu\text{A}$
$I_{OZL}$	$V_{CC} = 5.5 \text{ V}$ , $V_I = 0.4 \text{ V}$	-20			-20			$\mu\text{A}$
$I_I$	$V_{CC} = 5.5 \text{ V}$ , $V_I = 7 \text{ V}$	0.1			0.1			mA
$I_{IH}$	$V_{CC} = 5.5 \text{ V}$ , $V_I = 2.7 \text{ V}$	20			20			$\mu\text{A}$
$I_{IL}$	$V_{CC} = 5.5 \text{ V}$ , $V_I = 0.4 \text{ V}$	-0.1			-0.1			mA
$I_O^{\S}$	$V_{CC} = 5.5 \text{ V}$ , $V_O = 2.25 \text{ V}$	-30	-112		-30	-112		mA
$I_{CC}$	$V_{CC} = 5.5 \text{ V}$	Outputs high		6.5	6.5		mA	
		Outputs low		10	10			
		Outputs disabled		12	12			

<sup>‡</sup>All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25 \text{ °C}$ .

<sup>§</sup>The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current,  $I_{OS}$ .

2

ALS AND AS CIRCUITS

**TYPES SN54ALS1240, SN54ALS1241, SN74ALS1240, SN74ALS1241  
OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

**\*ALS1240 switching characteristics (see Note 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega,$ $R_2 = 500 \Omega,$ $T_A = \text{MIN to MAX}$						UNIT
			SN54ALS1240			SN74ALS1240			
			MIN	TYP <sup>†</sup>	MAX	MIN	TYP <sup>†</sup>	MAX	
t <sub>PLH</sub>	A	Y	9			9			ns
t <sub>PHL</sub>			9			9			
t <sub>PZH</sub>	$\bar{G}$	Y	17			17			ns
t <sub>PZL</sub>			19			19			
t <sub>PHZ</sub>	$\bar{G}$	Y	7			7			ns
t <sub>PLZ</sub>			6			6			

**\*ALS1241 switching characteristics (see Note 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega,$ $R_2 = 500 \Omega,$ $T_A = \text{MIN to MAX}$						UNIT
			SN54ALS1241			SN74ALS1241			
			MIN	TYP <sup>†</sup>	MAX	MIN	TYP <sup>†</sup>	MAX	
t <sub>PLH</sub>	A	Y	9			9			ns
t <sub>PHL</sub>			9			9			
t <sub>PZH</sub>	$\bar{G}$ or G	Y	17			17			ns
t <sub>PZL</sub>			19			19			
t <sub>PHZ</sub>	$\bar{G}$ or G	Y	7			7			ns
t <sub>PLZ</sub>			6			6			

<sup>†</sup>All typical values are at  $V_{CC} = 5 \text{ V, } T_A = 25^\circ\text{C.}$   
 NOTE 1: For load circuit and voltage waveforms, see page 1-12.