

Quad 2-input NOR gate

74F02

FEATURE

- Industrial temperature range available (-40°C to +85°C)

| TYPE | TYPICAL PROPAGATION DELAY | TYPICAL SUPPLY CURRENT (TOTAL) |
|-------|---------------------------|--------------------------------|
| 74F02 | 3.4ns | 4.4mA |

ORDERING INFORMATION


| DESCRIPTION | ORDER CODE | |
|--------------------|--|--|
| | COMMERCIAL RANGE $V_{CC} = 5V \pm 10\%$, $T_{amb} = 0^\circ C$ to $+70^\circ C$ | INDUSTRIAL RANGE $V_{CC} = 5V \pm 10\%$, $T_{amb} = -40^\circ C$ to $+85^\circ C$ |
| 14-pin plastic DIP | N74F02N | I74F02N |
| 14-pin plastic SO | N74F02D | I74F02D |

INPUT AND OUTPUT LOADNG AND FAN OUT TABLE

| PINS | DESCRIPTION | 74F (U.L.) HIGH/LOW | LOAD VALUE HIGH/LOW |
|-------------|-------------|---------------------|---------------------|
| Dna, Dnb | Data inputs | 1.0/1.0 | 20µA/0.6mA |
| \bar{Q}_n | Data output | 50/33 | 1.0mA/20mA |

NOTE: One (1.0) FAST unit load is defined as: 20µA in the high state and 0.6mA in the low state.

LOGIC DIAGRAM

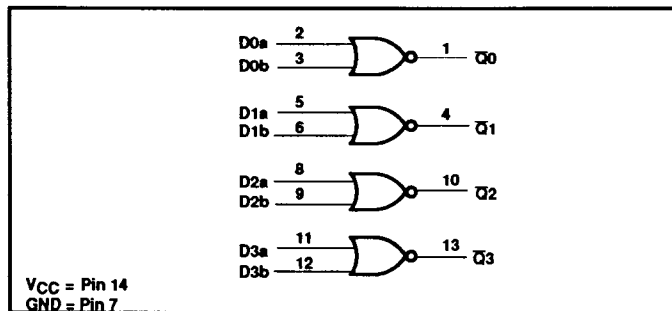


FUNCTION TABLE

| INPUTS | | OUTPUT |
|--------|-----|-------------|
| Dna | Dnb | \bar{Q}_n |
| L | L | H |
| L | H | L |
| H | L | L |
| H | H | L |


NOTES:

- H = High voltage level
- L = Low voltage level


PIN CONFIGURATION

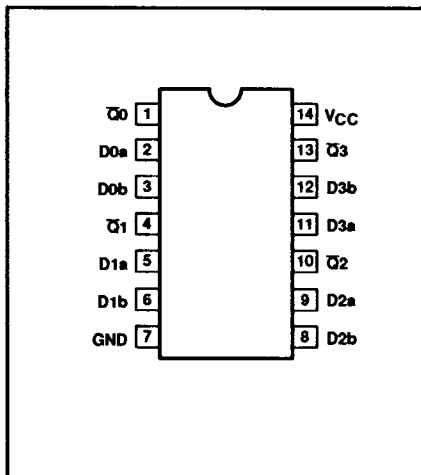

LOGIC SYMBOL

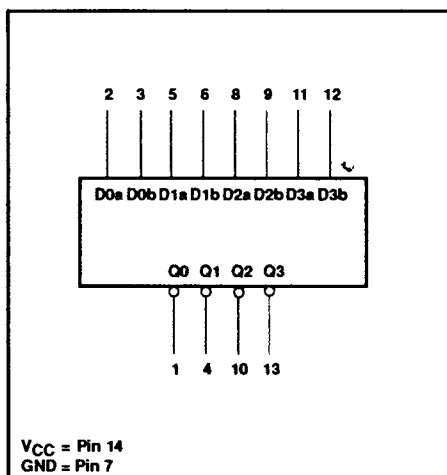

IEC/IEEE SYMBOL

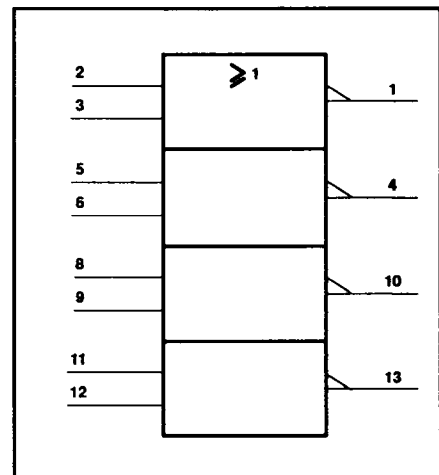

Quad 2-input NOR gate

74F02

ABSOLUTE MAXIMUM RATINGS

(Operation beyond the limit set forth in this table may impair the useful life of the device. Unless otherwise noted these limits are over the operating free air temperature range.)

| SYMBOL | PARAMETER | RATING | UNIT | |
|------------------|--|-------------------------|------------|----|
| V _{CC} | Supply voltage | -0.5 to +7.0 | V | |
| V _{IN} | Input voltage | -0.5 to +7.0 | V | |
| I _{IN} | Input current | -30 to +5 | mA | |
| V _{OUT} | Voltage applied to output in high output state | -0.5 to V _{CC} | V | |
| I _{OUT} | Current applied to output in low output state | 40 | mA | |
| T _{amb} | Operating free air temperature range | Commercial range | 0 to +70 | °C |
| | | Industrial range | -40 to +85 | °C |
| T _{stg} | Storage temperature range | -65 to +150 | °C | |

RECOMMENDED OPERATING CONDITIONS

| SYMBOL | PARAMETER | LIMITS | | | UNIT |
|------------------|--------------------------------------|------------------|-----|-----|------|
| | | MIN | NOM | MAX | |
| V _{CC} | Supply voltage | 4.5 | 5.0 | 5.5 | V |
| V _{IH} | High-level input voltage | 2.0 | | | V |
| V _{IL} | Low-level input voltage | | | 0.8 | V |
| I _{IK} | Input clamp current | | | -18 | mA |
| I _{OH} | High-level output current | | | -1 | mA |
| I _{OL} | Low-level output current | | | 20 | mA |
| T _{amb} | Operating free air temperature range | Commercial range | 0 | +70 | °C |
| | | Industrial range | -40 | +85 | °C |

DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

| SYMBOL | PARAMETER | TEST CONDITIONS ¹ | LIMITS | | | UNIT | |
|-----------------|---|---|-----------------------|------------------|-------|------|----|
| | | | MIN | TYP ² | MAX | | |
| V _{OH} | High-level output voltage | V _{CC} = MIN, V _{IL} = MAX | ±10%V _{CC} | 2.5 | | V | |
| | | V _{IH} = MIN, I _{OH} = MAX | ±5%V _{CC} | 2.7 | 3.4 | V | |
| V _{OL} | Low-level output voltage | V _{CC} = MIN, V _{IL} = MAX | ±10%V _{CC} | | 0.30 | 0.50 | V |
| | | V _{IH} = MIN, I _{OL} = MAX | ±5%V _{CC} | | 0.30 | 0.50 | V |
| V _{IK} | Input clamp voltage | V _{CC} = MIN, I _I = I _{IK} | | | -0.73 | -1.2 | V |
| I _I | Input current at maximum input voltage | V _{CC} = MAX, V _I = 7.0V | | | | 100 | μA |
| I _{IH} | High-level input current | V _{CC} = MAX, V _I = 2.7V | | | | 20 | μA |
| I _{IL} | Low-level input current | V _{CC} = MAX, V _I = 0.5V | | | | -0.6 | mA |
| I _{OS} | Short-circuit output current ³ | V _{CC} = MAX | | -60 | | -150 | mA |
| I _{CC} | Supply current (total) ⁴ | I _{CCH} | V _{CC} = MAX | | 3.0 | 5.6 | mA |
| | | I _{CCL} | V _{CC} = MAX | | 7.0 | 13.0 | mA |

NOTES:

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- All typical values are at V_{CC} = 5V, T_{amb} = 25°C.

Quad 2-input NOR gate


74F02

- Not more than one output should be shorted at a time. For testing I_{OS} , the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a high output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests, I_{OS} tests should be performed last.
- I_{CC} is measured with outputs open.

AC ELECTRICAL CHARACTERISTICS


| SYMBOL | PARAMETER | TEST CONDITION | LIMITS | | | | | | UNIT | |
|------------------------|--|----------------|---|------------|------------|--|------------|--|------------|-----|
| | | | $T_{amb} = +25^{\circ}C$ $V_{CC} = +5.0V$ $C_L = 50pF$, $R_L = 500\Omega$ | | | $T_{amb} = 0^{\circ}C$ to $+70^{\circ}C$ $V_{CC} = +5.0V \pm 10\%$ $C_L = 50pF$, $R_L = 500\Omega$ | | $T_{amb} = -40^{\circ}C$ to $+85^{\circ}C$ $V_{CC} = +5.0V \pm 10\%$ $C_L = 50pF$, $R_L = 500\Omega$ | | |
| | | | MIN | TYP | MAX | MIN | MAX | MIN | | MAX |
| t_{PLH} t_{PHL} | Propagation delay D_{na}, D_{nb} to \bar{Q}_n | Waveform 1 | 2.5 2.0 | 4.4 3.2 | 5.5 4.3 | 2.5 2.0 | 6.5 5.3 | 2.5 1.5 | 7.0 6.0 | ns |

AC WAVEFORMS

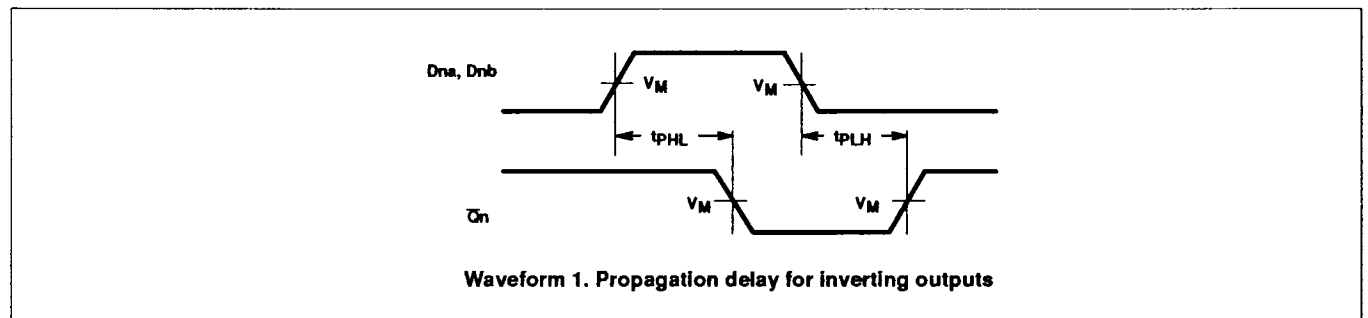

NOTE: For all waveforms, $V_M = 1.5V$.

TEST CIRCUIT AND WAVEFORM

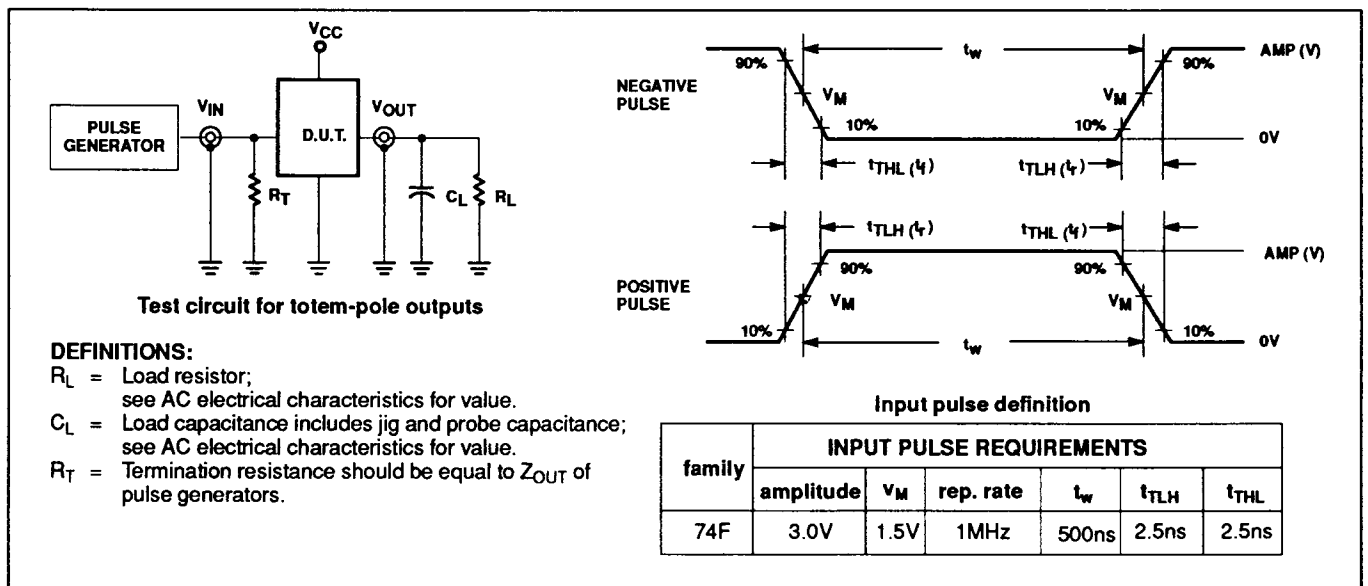

VI. COMMERCIAL PRODUCT SPECIAL PROCESSING T-90-20

SUPR II LEVEL B PRICING ADDERS

SUPR II LEVEL B

Signetics Upgraded Product Reliability (SUPR) program is designed to provide customers whose systems require an infant mortality level less than that of our non-burned-in products (which is typically below 1000 PPM).


DEVICE AVAILABILITY

Products available for Level B processing are identified in the Price Book with a "B" suffix to the basic part number.


| PRODUCT FAMILY | SUGGESTED RESALE ADDERS | | |
|----------------|-----------------------------|---------|-----------|
| | 1-99 | 100-999 | OVER 1000 |
| LIN | .14 | .14 | .11 |
| LOG (TTL) | | | |
| (SSI) | .12 | .10 | .08 |
| (MSI) | .16 | .14 | .11 |
| (OCT) | .16 | .14 | .11 |
| (CTM) | .16 | .14 | .11 |
| LOG (ECL) | | | |
| (SSI) | .25 | .23 | .20 |
| (MSI) | .25 | .23 | .20 |
| LOG (LSI) | Consult Factory for Pricing | | |
| (RAM) | | | |
| MIC (8X) | Consult Factory for Pricing | | |
| PLD | | | |
| MCG | Consult Factory for Pricing | | |
| DAT | Not Available | | |
| MIC | | | |

MARKING FORMAT EXAMPLES

Standard (no Burn-In) Products (Dual-in-line)

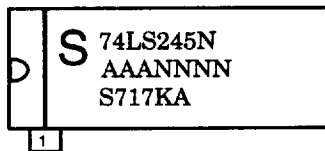

SUPR II (Burned-In) Products (Dual-in-line)

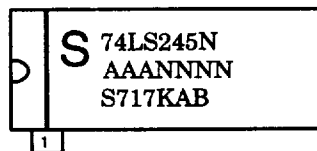

NOTE: The "B" in the 7th position on the 3rd line, when present, is the SUPR II Burn-In indicator.

TAPE AND REEL PACKAGING

SPECIFICATIONS

Tape and Reel specifications conform to Electronic Industries Association (EIA) Proposed Specification #EIA-481-A using 13 inch reels. Current incremental quantities reflect the quantities per reel. As more customers are able to handle a larger quantity per reel, this quantity will be increased.

DEVICE AVAILABILITY

Products available in tape and reel packaging are identified in the Price Book with a "T" suffix to the basic part number and are only offered as a product for sale by the reel. Return of product is limited to full reels with unbroken quality seals.

TAPE AND REEL PRICING ADDERS

| PRODUCT FAMILY | SUGGESTED RESALE ADDER |
|----------------|--|
| MCG | .07 |
| LIN | .07 |
| LOG | .07 |
| DAT | PACKAGE A28 = .20 A44 = .25 A52 = .30 A68 = .40 A84 = .45 D24 = .17 |
| MIC | |

VII. PACKING QUANTITY INFORMATION

T-90-20

CERAMIC DUAL IN-LINE (CERDIP)

| PACKAGE CODE | PIN COUNT | QUANTITIES | |
|------------------------|------------------|------------------|-----------------|
| | | DEVICES PER TUBE | DEVICES PER BOX |
| F/FE, BPA, PA | 8-pin (300-mil) | 48 | 1920 |
| F, BCA, CA | 14-pin (300-mil) | 25 | 1000 |
| F, BEA, EA | 16-pin (300-mil) | 25 | 1000 |
| F, BVA, MVA | 18-pin (300-mil) | 21 | 840 |
| F/FA, BRA, RA | 20-pin (300-mil) | 20 | 800 |
| F, BWA, WA | 22-pin (400-mil) | 17 | 544 |
| F/FA/F6, BJA, JA | 24-pin (600-mil) | 15 | 360 |
| F/FA/F3/F24, BLA, LA | 24-pin (300-mil) | 15 | 600 |
| F, BXA, XA | 24-pin (400-mil) | 15 | 480 |
| F/FA/F28, BXA, XA | 28-pin (600-mil) | 13 | 312 |
| FA | 32-pin (600-mil) | 11 | 264 |
| F/FA/F40, BQA, MQA, QA | 40-pin (600-mil) | 9 | 216 |

CERPAC

| PACKAGE CODE | PIN COUNT | QUANTITIES |
|--------------|-----------|------------------|
| | | DEVICES PER TUBE |
| BDA/DAW | 14-pin | 145 |
| BFA/FAW | 16-pin | 145 |
| BXA/BYAW | 18-pin | 100 |
| BSA/SAW/WB | 20-pin | 100 |
| BKA/KAW | 24-pin | 120 |
| BYA/YAW | 28-pin | 50 |

CERQUAD

| PACKAGE CODE | PIN COUNT | QUANTITIES | |
|--------------|-----------|------------------|-----------------|
| | | DEVICES PER TRAY | DEVICES PER BOX |
| KA/K44 | 44-pin | 6 | 6 |
| KA/K68 | 68-pin | 4 | 4 |
| KA | 84-pin | 42 | 210 |

LEADLESS CHIP CARRIER

| PACKAGE CODE | PIN COUNT | QUANTITIES |
|-------------------------|-----------|------------------|
| | | DEVICES PER TUBE |
| B2A/2A/GA | 20-pin | 55 |
| B3A/3A/GA/GC1 | 28-pin | 43 |
| YA/YA/GC2 | 32-pin | 35 |
| BUA/MXA/MUA/UA/XA/GA/GC | 44-pin | 27 |
| BZA/BUA/UA/ZA/GA/GC | 68-pin | 19 |

QUANTITIES SHOWN IN GRAY REQUIRE PURCHASE TO BE MADE IN EXACT MULTIPLES OF THAT QUANTITY.

VII. PACKING QUANTITY INFORMATION

T-90-20

PLASTIC DUAL IN-LINE

| PACKAGE CODE | PIN COUNT | QUANTITIES | |
|--------------|----------------------|------------------|-----------------|
| | | DEVICES PER TUBE | DEVICES PER BOX |
| N/N8 | 8-pin (300-mil) | 50 | 2000 |
| N/N14/N16 | 14- 16-pin (300-mil) | 25 | 1000 |
| N | 18-pin (300-mil) | 20 | 800 |
| N/N20 | 20-pin (300-mil) | 18 | 720 |
| N | 22-pin (400-mil) | 17 | 544 |
| N/N6 | 24-pin (600-mil) | 15 | 360 |
| N/N3/N24 | 24-pin (300-mil) | 15 | 600 |
| N/N24 | 24-pin (400-mil) | 15 | 480 |
| N/N28 | 28-pin (600-mil) | 13 | 312 |
| N/N3 | 28-pin (300-mil) | 13 | 520 |
| N | 32-pin (600-mil) | 11 | 264 |
| N/N40 | 40-pin (600-mil) | 9 | 216 |
| NB (Shrink) | 42-pin (600-mil) | 12 | 288 |
| N/N48 | 48-pin (600-mil) | 7 | 168 |
| N | 50-pin (900-mil) | 7 | 112 |
| N/N64 | 64-pin (900-mil) | 5 | 80 |

PLASTIC LEADED CHIP CARRIER (PLCC)

| PACKAGE CODE | PIN COUNT | QUANTITIES | | |
|--------------|-----------|------------------|-----------------|------------------|
| | | DEVICES PER TUBE | DEVICES PER BOX | DEVICES PER REEL |
| A | 20-pin | 46 | 3680 | 1000 |
| A/A28 | 28-pin | 37 | 2368 | 750 |
| A | 32-pin | 31 | 2232 | 750 |
| A/A44 | 44-pin | 26 | 1248 | 500 |
| A/A52 | 52-pin | 23 | 1012 | 500 |
| A/A68 | 68-pin | 18 | 648 | 250 |
| A/A84 | 84-pin | 15 | 420 | 250 |

QUANTITIES SHOWN IN GRAY REQUIRE PURCHASE TO BE MADE IN EXACT MULTIPLES OF THAT QUANTITY.

VII. PACKING QUANTITY INFORMATION

T-90-20

PLASTIC SMALL OUTLINE (SO)

| PACKAGE CODE | PIN COUNT | QUANTITIES | | |
|--------------|------------------|------------------|-----------------|------------------------|
| | | DEVICES PER TUBE | DEVICES PER BOX | DEVICES PER REEL |
| D/D8 | 8-pin (150-mil) | 100 | 10000 | 2500 |
| D | 8-pin (300-mil) | 64 | 2560 | 1000 - 13" 700 - 7" |
| D/D14 | 14-pin (150-mil) | 57 | 5700 | 2500 |
| D | 16-pin (150-mil) | 50 | 5000 | 2500 |
| D | 16-pin (300-mil) | 48 | 1920 | 1000 |
| DK(SSOP) | 20-pin (170-mil) | 75 | 6750 | 2500 |
| D | 20-pin (300-mil) | 38 | 1520 | 1000 |
| D/D24 | 24-pin (300-mil) | 32 | 1280 | 1000 |
| D | 28-pin (300-mil) | 27 | 1080 | 1000 |
| D | 40-pin (VSO-40) | 31 | 1240 | 1000 - 13" 300 - 7" |
| D | 56-pin (VSO-56) | 22 | 616 | 1000 |

QUAD FLAT PACK*

| PACKAGE CODE | PIN COUNT | QUANTITIES | |
|--------------|--------------------------|------------------|-----------------|
| | | DEVICES PER TRAY | DEVICES PER BOX |
| B/B44 | 44-pin | 50 | 500 |
| B/B44 | 44-pin | 96 | 480 |
| B | 52-pin | 119 | 595 |
| B | 80-pin | 86 | 330 |
| B | 100-pin | 50 | 250 |
| B | 120-pin | 24 | 120 |
| B | 120-pin (Philips source) | 30 | 150 |

- * Quad Flat Pack parts require dry pack handling according to EIA Standard - 583.
These parts are identified in part list section with DRY PACK in the Cross Ref Part No field.

QUANTITIES SHOWN IN GRAY REQUIRE PURCHASE TO BE MADE IN EXACT MULTIPLES OF THAT QUANTITY.