
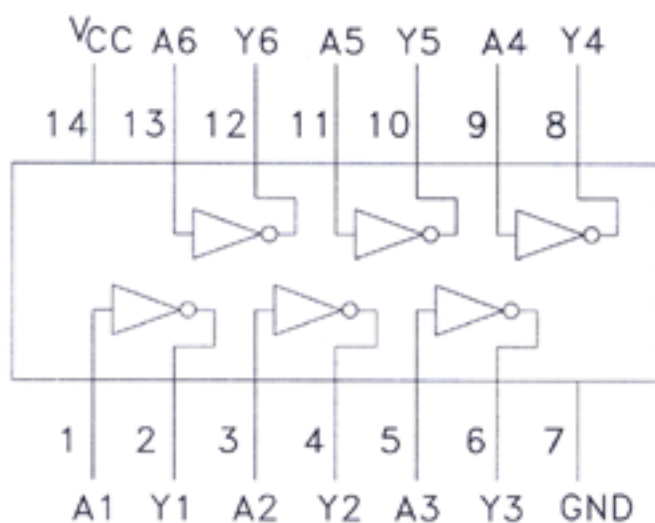


Hex Inverter

This device contains six independent gates, each of which performs the logic INVERT function.

- AVG's LS operates over extended Vcc from 4.5 to 5.5 V
- AVG's LS and ALS both have guaranteed DC and AC specification over full temperature and Vcc range
- Switching specifications for ALS at 50 pF
- AVG's ALS has the lowest speed power product (4pJ per gate typical) of all logic series

DV74LS04
DV74ALS04B

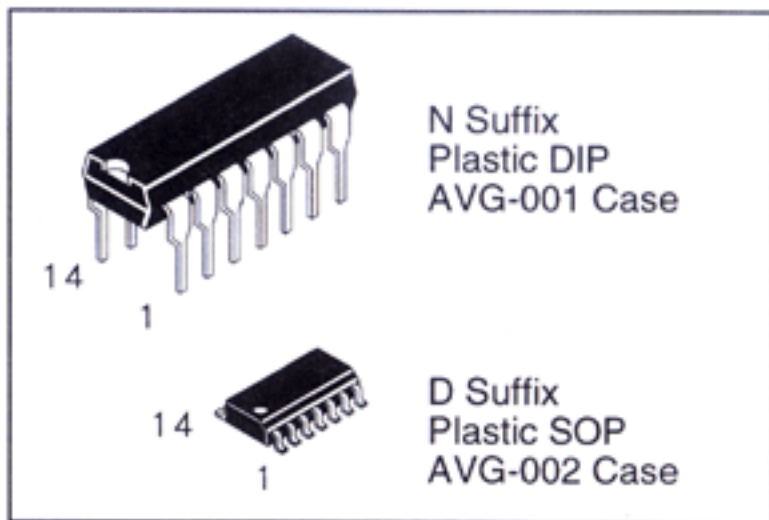

TRUTH TABLE
 $Y = \overline{A}$

Inputs	Outputs
A	Y
L	H
H	L

H = High Logic Level
L = Low Logic Level

ABSOLUTE MAXIMUM RATINGS

Maximum ratings are those values beyond which damage to the device may occur.

Symbol	Parameter	LS04	ALS04B	Unit
V _{CC}	Supply Voltage	7.0	7.0	V
V _{IN}	Input Voltage	7.0	7.0	V
T _{STG}	Storage Temperature Range	-65 to +150	-65 to + 150	°C

GUARANTEED OPERATING CONDITIONS

Symbol	Parameter	LS04		ALS04B		Unit
		Min	Max	Min	Max	
V _{CC}	Supply Voltage	4.5	5.5	4.5	5.5	V
V _{IH}	High Level Input Voltage	2.0		2.0		V
V _{IL}	Low Level Input Voltage		0.8		0.8	V
I _{OH}	High Level Output Current		-0.4		-0.4	mA
I _{OL}	Low Level Output Current		8.0		8.0	mA
T _A	Ambient Temperature Range	-10 to +70		-10 to + 70		°C

DC ELECTRICAL CHARACTERISTICS over full operating conditions

Symbol	Parameter	Conditions	LS04			ALS04B			Unit
			Min	Typ	Max	Min	Typ	Max	
V_{IK}	Input Clamp Voltage	$V_{CC} = \text{min}, I_{IN} = -18 \text{ mA}$			-1.5			-1.5	V
V_{OH}	High Level Output Voltage	$V_{CC}=\text{min}, I_{OH}=\text{max},$	$V_{CC}-2$	3.5		$V_{CC}-2$			V
V_{OL}	Low Level Output Voltage	$V_{CC}=\text{min}$							V
		$V_{CC}=\text{min}; I_{OL}= 4 \text{ mA}$ $V_{CC}=\text{min}; I_{OL}=8 \text{ mA}$		0.25 0.35	0.4 0.5		0.25 0.35	0.4 0.5	V V
I_{IH}	High Level Input Current	$V_{CC}=\text{max}, V_{IN}= 2.7\text{V}$			20			20	μA
		$V_{CC}=\text{max}, V_{IN}= 7\text{V}$			0.1			0.1	mA
I_{IL}	Low Level Input Current	$V_{CC}=\text{max}, V_{IN}=0.4\text{V}$			-0.4			-0.1	mA
I_o	Output Short Circuit Current	$V_{CC}=\text{max}, V_{OUT}=2.25\text{V}$	-20		-110	-30		-112	mA
I_{CC}	Supply Current Outputs High Outputs Low	$V_{CC}=\text{max}$			2.4		0.65	1.1	mA
					6.6		2.9	4.2	mA

SWITCHING CHARACTERISTICS over full operating conditions

Symbol	Parameter	From	To	LS04 CL=15 pF		ALS04B CL=50pF RL = 500Ω		Unit
				Min	Max	Min	Max	
t_{PLH}	Propagation Delay Time, Low to High Level Output	Input	Output		15	3	11	ns
t_{PHL}	Propagation Delay Time, High to Low Level Output	Input	Output		15	2	8	ns

SWITCHING WAVEFORMS

