

DN74LS08



Quad 2-input Positive AND Gates

■ Description

DN74LS08 contains four 2-input positive isolation AND gate circuits.

■ Features

- Low power consumption ($P_d = 17\text{mW}$ typical)
- High speed ($t_{pd} = 9\text{ns}$ typical)
- Low output impedance
- Wide operating temperature range ($T_a = -20$ to $+75^\circ\text{C}$)

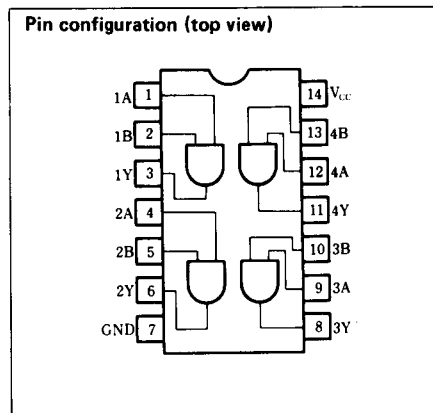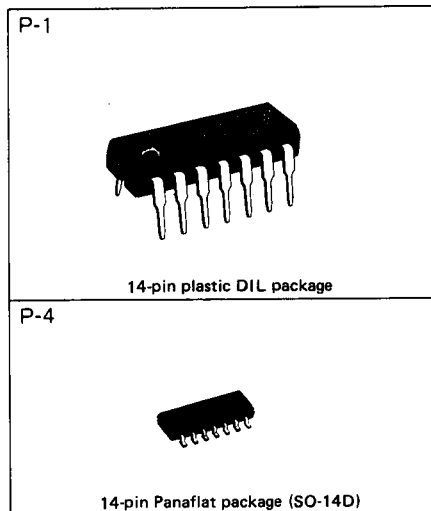

■ Recommended operating conditions

Parameter	Sym	Min	Typ	Max	Unit
Supply voltage	V_{CC}	4.75	5.00	5.25	V
Output current	I_{OH}			-400	μA
	I_{OL}			8	mA
Operating temperature range	T_{opr}	-20	25	75	$^\circ\text{C}$

■ DC characteristics (Ta = -20 ~ +75°C)

Parameter	Sym	Test conditions	Min	Typ*	Max	Unit
Input voltage	V _{IH}		2.0			V
	V _{IL}				0.8	V
Output voltage	V _{OH}	V _{CC} = 4.75 V, V _{IH} = 2 V I _{OH} = -400 μA	2.7	3.4		V
	V _{O1.1}	V _{CC} = 4.75 V		0.25	0.4	V
	V _{O1.2}	V _{IL} = 0.8 V I _{OL1} = 4 mA I _{OL2} = 8 mA		0.35	0.5	V
Input current	I _{IH}	V _{CC} = 5.25 V V _i = 2.7 V			20	μA
	I _{IL}	V _{CC} = 5.25 V V _i = 0.4 V			-0.4	mA
	I _i	V _{CC} = 5.25 V V _i = 7 V			0.1	mA
Output short circuit current**	I _{OS}	V _{CC} = 5.25 V, V _o = 0 V	-15		-100	mA
Input clamp voltage	V _{IK}	V _{CC} = 4.75 V I _i = -18 mA			-1.5	V
Supply current	I _{ECH}	V _{CC} = 5.25 V,		2.4	4.8	mA
	I _{ECL}	V _{CC} = 5.25 V,		4.4	8.8	mA

* When constant at V_{CC} = 5V, Ta = 25°C.


** Only one output at a time short circuited to GND. Also, short circuit time to GND within 1 second.

■ Switching characteristics (V_{CC} = 5V, Ta = 25°C)

Parameter	Sym	Test conditions	Min	Typ	Max	Unit
Propagation delay time	t _{PLH}	C _L = 15 pF, R _L = 2kΩ		8	15	ns
	t _{PHL}			10	20	ns

※ Switching parameter measurement information


1. Measurement circuit

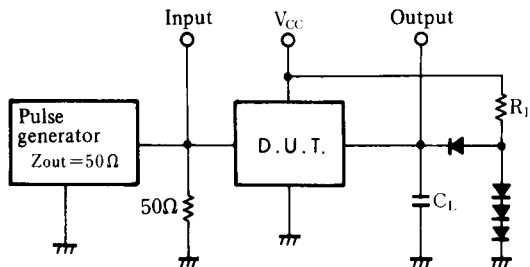

Notes

1. C_L includes probe and tool floating capacitance.
2. Diodes are all MA161.

2. Waveforms

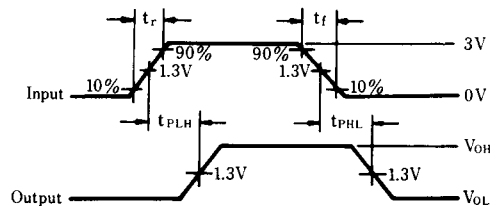

Notes

1. Input waveform: tr ≤ 15ns, tf ≤ 6ns, PRR = 1MHz, duty cycle = 50%.