



Integrated Device Technology, Inc.

# FAST CMOS OCTAL BUFFER/LINE DRIVERS

IDT54/74FCT240T/AT/CT/DT - 2240T/AT/CT  
IDT54/74FCT244T/AT/CT/DT - 2244T/AT/CT  
IDT54/74FCT540T/AT/CT  
IDT54/74FCT541/2541T/AT/CT

## FEATURES:

- **Common features:**
  - Low input and output leakage  $\leq 1\mu\text{A}$  (max.)
  - Extended commercial range of  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$
  - CMOS power levels
  - True TTL input and output compatibility
    - $V_{OH} = 3.3\text{V}$  (typ.)
    - $V_{OL} = 0.3\text{V}$  (typ.)
  - Meets or exceeds JEDEC standard 18 specifications
  - Product available in Radiation Tolerant and Radiation Enhanced versions
  - Military product compliant to MIL-STD-883, Class B and DESC listed (dual marked)
  - Available in DIP, SOIC, SSOP, QSOP, TSSOP, CERPACK and LCC packages
- **Features for FCT240T/FCT244T/FCT540T/FCT541T:**
  - Std., A, C and D speed grades
  - High drive outputs (-15mA IOH, 64mA IOL)
- **Features for FCT2240T/FCT2244T/FCT2541T:**
  - Std., A and C speed grades
  - Resistor outputs (-15mA IOH, 12mA IOL Com.) (-12mA IOH, 12mA IOL Mil.)
  - Reduced system switching noise


## DESCRIPTION:

The IDT octal buffer/line drivers are built using an advanced dual metal CMOS technology. The FCT240T/FCT2240T and FCT244T/FCT2244T are designed to be employed as memory and address drivers, clock drivers and bus-oriented transmitter/receivers which provide improved board density.


The FCT540T and FCT541T/FCT2541T are similar in function to the FCT240T/FCT2240T and FCT244T/FCT2244T, respectively, except that the inputs and outputs are on opposite sides of the package. This pinout arrangement makes these devices especially useful as output ports for microprocessors and as backplane drivers, allowing ease of layout and greater board density.

The FCT2240T, FCT2244T and FCT2541T have balanced output drive with current limiting resistors. This offers low ground bounce, minimal undershoot and controlled output fall times-reducing the need for external series terminating resistors. FCT2xxxT parts are plug-in replacements for FCTxxxT parts.


## FUNCTIONAL BLOCK DIAGRAMS

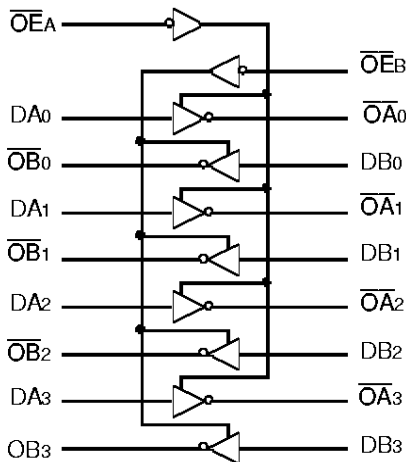

FCT240/2240T

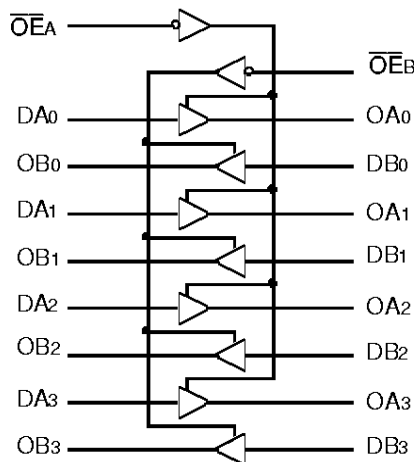

FCT244/2244T

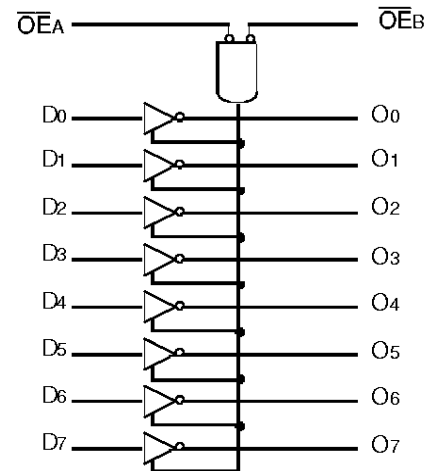

FCT540/541/2541T

\*Logic diagram shown for 'FCT540.  
'FCT541/2541T is the non-inverting option.

2565 drw 01

2565 drw 02

2565 drw 03


The IDT logo is a registered trademark of Integrated Device Technology, Inc.

## MILITARY AND INDUSTRIAL TEMPERATURE RANGES

SEPTEMBER 1996


**PIN CONFIGURATIONS**

**FCT240/2240T**

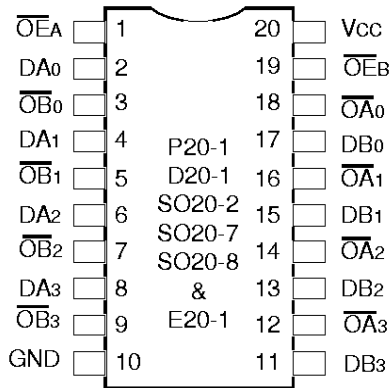

**DIP/SOIC/SSOP/QSOP/CERPACK  
TOP VIEW**


2555 drw 04

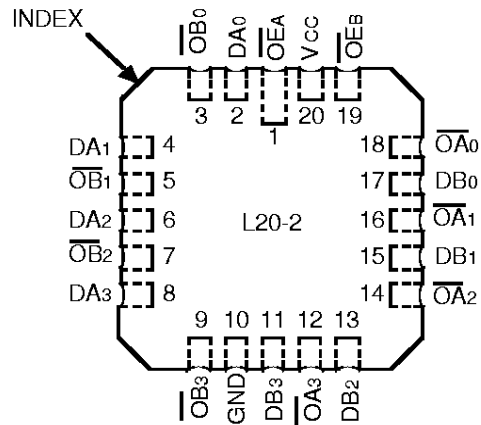

**LCC  
TOP VIEW**


2555 drw 07

**FCT244/2244T**

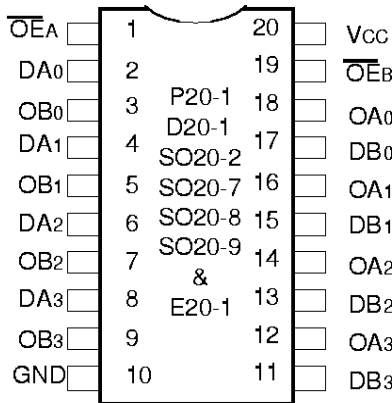

**DIP/SOIC/SSOP/QSOP/  
TSSOP/CERPACK  
TOP VIEW**


2555 drw 05

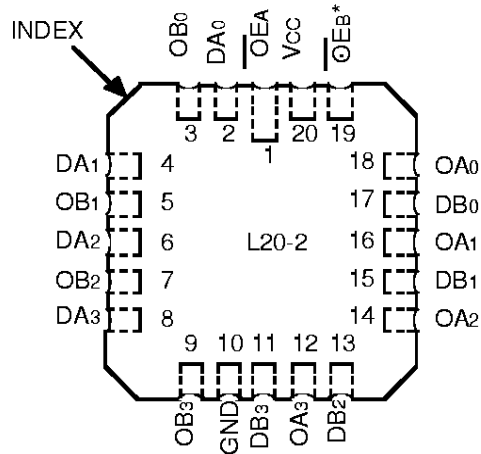

**LCC  
TOP VIEW**

2555 drw 08


**FCT540/541/2541T**

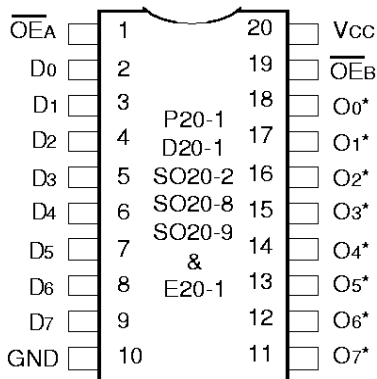

**DIP/SOIC/QSOP/  
TSSOP/CERPACK  
TOP VIEW**

\*Ox for 540, Ox for 541/2541 T

2555 drw 06

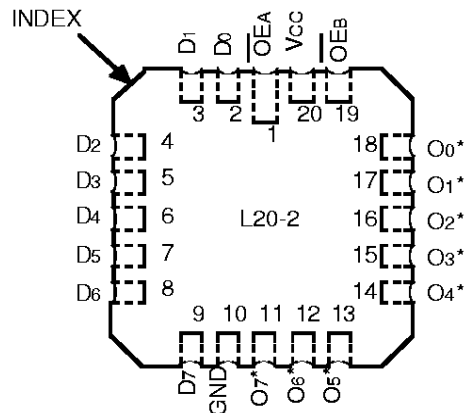

**LCC  
TOP VIEW**

2555 drw 09

## PIN DESCRIPTION

| Pin Names                             | Description                               |
|---------------------------------------|---|
| $\overline{OE}_A$ , $\overline{OE}_B$ | 3-State Output Enable Inputs (Active LOW) |
| Dxx                                   | Inputs                                    |
| Oxx                                   | Outputs                                   |

2565 tbl 01

## FUNCTION TABLE

| Inputs <sup>(1)</sup> |                   |   | Outputs <sup>(1)</sup> |     |     |     |
|-----------------------|-------------------|---|------------------------|-----|-----|-----|
| $\overline{OE}_A$     | $\overline{OE}_B$ | D | 240                    | 244 | 540 | 541 |
| L                     | L                 | L | H                      | L   | H   | L   |
| L                     | L                 | H | L                      | H   | L   | H   |
| H                     | H                 | X | Z                      | Z   | Z   | Z   |

## NOTES:

- H = High Voltage Level  
X = Don't Care  
L = Low Voltage Level  
Z = High Impedance

2565 tbl 02

ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol               | Description                          | Max.                         | Unit |
|----------------------|--------------------------------------|------------------------------|------|
| VTERM <sup>(2)</sup> | Terminal Voltage with Respect to GND | -0.5 to +7.0                 | V    |
| VTERM <sup>(3)</sup> | Terminal Voltage with Respect to GND | -0.5 to V <sub>CC</sub> +0.5 | V    |
| TSTG                 | Storage Temperature                  | -65 to +150                  | °C   |
| I <sub>OUT</sub>     | DC Output Current                    | -60 to +120                  | mA   |

2565 lmk 03

## NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability. No terminal voltage may exceed V<sub>CC</sub> by +0.5V unless otherwise noted.
- Input and V<sub>CC</sub> terminals only.
- Outputs and I/O terminals only.

## CAPACITANCE (TA = +25°C, f = 1.0MHz)

| Symbol           | Parameter <sup>(1)</sup> | Conditions            | Typ. | Max. | Unit |
|------------------|--------------------------|-----------------------|------|------|------|
| C <sub>IN</sub>  | Input Capacitance        | V <sub>IN</sub> = 0V  | 6    | 10   | pF   |
| C <sub>OUT</sub> | Output Capacitance       | V <sub>OUT</sub> = 0V | 8    | 12   | pF   |

## NOTE:

- This parameter is measured at characterization but not tested.

2565 lmk 04

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Commercial:  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{V} \pm 5\%$ ; Military:  $T_A = -55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{V} \pm 10\%$

| Symbol    | Parameter   | Test Conditions <sup>(1)</sup>                         |                     | Min. | Typ. <sup>(2)</sup> | Max.    | Unit          |
|-----------|---|--|---------------------|------|---------------------|---------|---------------|
| $V_{IH}$  | Input HIGH Level  | Guaranteed Logic HIGH Level                            |                     | 2.0  | —                   | —       | V             |
| $V_{IL}$  | Input LOW Level   | Guaranteed Logic LOW Level                             |                     | —    | —                   | 0.8     | V             |
| $I_{IH}$  | Input HIGH Current <sup>(4)</sup>                                     | $V_{CC} = \text{Max.}$                                 | $V_I = 2.7\text{V}$ | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{IL}$  | Input LOW Current <sup>(4)</sup>                                      |  | $V_I = 0.5\text{V}$ | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{OZH}$ | High Impedance Output Current<br>(3-State Output pins) <sup>(4)</sup> | $V_{CC} = \text{Max.}$                                 | $V_O = 2.7\text{V}$ | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{OZL}$ |   |  | $V_O = 0.5\text{V}$ | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_I$     | Input HIGH Current <sup>(4)</sup>                                     | $V_{CC} = \text{Max.}, V_I = V_{CC} (\text{Max.})$     |                     | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $V_{IK}$  | Clamp Diode Voltage   | $V_{CC} = \text{Min.}, I_{IN} = -18\text{mA}$          |                     | —    | -0.7                | -1.2    | V             |
| $V_H$     | Input Hysteresis  | —  |                     | —    | 200                 | —       | mV            |
| $I_{CC}$  | Quiescent Power Supply Current  | $V_{CC} = \text{Max.}, V_{IN} = \text{GND or } V_{CC}$ |                     | —    | 0.01                | 1       | mA            |

2565 Ink 05

## OUTPUT DRIVE CHARACTERISTICS FOR FCT240/244/540/541 T

| Symbol   | Parameter             | Test Conditions <sup>(1)</sup>                                 |  | Min. | Typ. <sup>(2)</sup> | Max. | Unit |
|----------|-----------------------|--|--|------|---------------------|------|------|
| $V_{OH}$ | Output HIGH Voltage   | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH} \text{ or } V_{IL}$ | $I_{OH} = -6\text{mA MIL.}$                                    | 2.4  | 3.3                 | —    | V    |
|          |                       |  | $I_{OH} = -8\text{mA COM'L.}$                                  | —    | —                   | —    | —    |
|          |                       |  | $I_{OH} = -12\text{mA MIL.}$<br>$I_{OH} = -15\text{mA COM'L.}$ | 2.0  | 3.0                 | —    | V    |
| $V_{OL}$ | Output LOW Voltage    | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH} \text{ or } V_{IL}$ | $I_{OL} = 48\text{mA MIL.}$<br>$I_{OL} = 64\text{mA COM'L.}$   | —    | 0.3                 | 0.55 | V    |
| $I_{OS}$ | Short Circuit Current | $V_{CC} = \text{Max.}, V_O = \text{GND}^{(3)}$                 |  | -60  | -120                | -225 | mA   |

2565 Ink 06

## OUTPUT DRIVE CHARACTERISTICS FOR FCT2240/2244/2541 T

| Symbol    | Parameter           | Test Conditions <sup>(1)</sup>  |                                | Min. | Typ. <sup>(2)</sup> | Max. | Unit |
|-----------|---------------------|---|--------------------------------|------|---------------------|------|------|
| $I_{ODL}$ | Output LOW Current  | $V_{CC} = 5\text{V}, V_{IN} = V_{IH} \text{ or } V_{IL}, V_{OUT} = 1.5\text{V}^{(3)}$ |                                | 16   | 48                  | —    | mA   |
| $I_{ODH}$ | Output HIGH Current | $V_{CC} = 5\text{V}, V_{IN} = V_{IH} \text{ or } V_{IL}, V_{OUT} = 1.5\text{V}^{(3)}$ |                                | -16  | -48                 | —    | mA   |
| $V_{OH}$  | Output HIGH Voltage | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH} \text{ or } V_{IL}$                        | $I_{OH} = -12\text{mA MIL.}$   | 2.4  | 3.3                 | —    | V    |
|           |                     |   | $I_{OH} = -15\text{mA COM'L.}$ | —    | —                   | —    | —    |
| $V_{OL}$  | Output LOW Voltage  | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH} \text{ or } V_{IL}$                        | $I_{OL} = 12\text{mA}$         | —    | 0.3                 | 0.50 | V    |

2565 Ink 07

### NOTES:

- For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at  $V_{CC} = 5.0\text{V}$ ,  $+25^{\circ}\text{C}$  ambient.
- Not more than one output should be shorted at one time. Duration of the short circuit test should not exceed one second.
- The test limit for this parameter is  $\pm 5\mu\text{A}$  at  $T_A = -55^{\circ}\text{C}$ .

**POWER SUPPLY CHARACTERISTICS**

| Symbol           | Parameter   | Test Conditions <sup>(1)</sup>  |  |  | Min.             | Typ. <sup>(2)</sup>      | Max.   | Unit       |
|------------------|---|---|--|--|------------------|--------------------------|--|------------|
| $\Delta I_{CC}$  | Quiescent Power Supply Current<br>TTL Inputs HIGH | V <sub>CC</sub> = Max.<br>V <sub>IN</sub> = 3.4V <sup>(3)</sup>   |  |  | —                | 0.5                      | 2.0  | mA         |
| I <sub>CCD</sub> | Dynamic Power Supply Current <sup>(4)</sup>       | V <sub>CC</sub> = Max.<br>Outputs Open<br>$\overline{OE}_A = \overline{OE}_B = GND$<br>One Input Toggling<br>50% Duty Cycle                             | V <sub>IN</sub> = V <sub>CC</sub><br>V <sub>IN</sub> = GND   | FCTxxxT<br>FCT2xxxT                        | —<br>—           | 0.15<br>0.06             | 0.25<br>0.12   | mA/<br>MHz |
| I <sub>C</sub>   | Total Power Supply Current <sup>(6)</sup>         | V <sub>CC</sub> = Max.<br>Outputs Open<br>f <sub>i</sub> = 10MHz<br>50% Duty Cycle<br>$\overline{OE}_A = \overline{OE}_B = GND$<br>One Bit Toggling     | V <sub>IN</sub> = V <sub>CC</sub><br>V <sub>IN</sub> = GND<br>V <sub>IN</sub> = 3.4<br>V <sub>IN</sub> = GND | FCTxxxT<br>FCT2xxxT<br>FCTxxxT<br>FCT2xxxT | —<br>—<br>—<br>— | 1.5<br>0.6<br>1.8<br>0.9 | 3.5<br>2.2<br>4.5<br>3.2   | mA         |
|                  |   | V <sub>CC</sub> = Max.<br>Outputs Open<br>f <sub>i</sub> = 2.5MHz<br>50% Duty Cycle<br>$\overline{OE}_A = \overline{OE}_B = GND$<br>Eight Bits Toggling | V <sub>IN</sub> = V <sub>CC</sub><br>V <sub>IN</sub> = GND<br>V <sub>IN</sub> = 3.4<br>V <sub>IN</sub> = GND | FCTxxxT<br>FCT2xxxT<br>FCTxxxT<br>FCT2xxxT | —<br>—<br>—<br>— | 3.0<br>1.2<br>5.0<br>3.2 | 6.0 <sup>(5)</sup><br>3.4 <sup>(5)</sup><br>14.0 <sup>(5)</sup><br>11.4 <sup>(5)</sup> |            |

**NOTES:**

- For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at V<sub>CC</sub> = 5.0V, +25°C ambient.
- Per TTL driven input (V<sub>IN</sub> = 3.4V). All other inputs at V<sub>CC</sub> or GND.
- This parameter is not directly testable, but is derived for use in Total Power Supply Calculations.
- Values for these conditions are examples of the I<sub>CC</sub> formula. These limits are guaranteed but not tested.
- I<sub>C</sub> = I<sub>QUIESCENT</sub> + I<sub>INPUTS</sub> + I<sub>DYNAMIC</sub>  
 $I_C = I_{CC} + \Delta I_{CC} D_{HNT} + I_{CCD} (f_{CP}/2 + f_i N_i)$   
 I<sub>CC</sub> = Quiescent Current  
 $\Delta I_{CC}$  = Power Supply Current for a TTL High Input (V<sub>IN</sub> = 3.4V)  
 D<sub>H</sub> = Duty Cycle for TTL Inputs High  
 N<sub>T</sub> = Number of TTL Inputs at D<sub>H</sub>  
 I<sub>CCD</sub> = Dynamic Current Caused by an Input Transition Pair (HLH or LHL)  
 f<sub>CP</sub> = Clock Frequency for Register Devices (Zero for Non-Register Devices)  
 f<sub>i</sub> = Input Frequency  
 N<sub>i</sub> = Number of Inputs at f<sub>i</sub>  
 All currents are in milliamps and all frequencies are in megahertz.

2565 tbl 08

**SWITCHING CHARACTERISTICS OVER OPERATING RANGE FOR FCT240/2240T**

| Symbol       | Parameter                                  | Condition <sup>(1)</sup> | FCT240T<br>FCT2240T |      |                     |      | FCT240AT<br>FCT2240AT |      |                     |      | Unit |
|--------------|--|--------------------------|---------------------|------|---------------------|------|-----------------------|------|---------------------|------|------|
|              |  |                          | Com'l.              |      | Mil.                |      | Com'l.                |      | Mil.                |      |      |
|              |  |                          | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup>   | Max. | Min. <sup>(2)</sup> | Max. |      |
| tPLH<br>tPHL | Propagation Delay<br>DN to $\overline{ON}$ | CL = 50pF<br>RL = 500Ω   | 1.5                 | 8.0  | 1.5                 | 9.0  | 1.5                   | 4.8  | 1.5                 | 5.1  | ns   |
| tPZH<br>tPZL | Output Enable Time                         |                          | 1.5                 | 10.0 | 1.5                 | 10.5 | 1.5                   | 6.2  | 1.5                 | 6.5  | ns   |
| tPHZ<br>tPLZ | Output Disable Time                        |                          | 1.5                 | 9.5  | 1.5                 | 10.0 | 1.5                   | 5.6  | 1.5                 | 5.9  | ns   |

2565 tbl 09

| Symbol       | Parameter                                  | Condition <sup>(1)</sup> | FCT240CT<br>FCT2240CT |      |                     |      | FCT240DT            |      |                     |      | Unit |
|--------------|--|--------------------------|-----------------------|------|---------------------|------|---------------------|------|---------------------|------|------|
|              |  |                          | Com'l.                |      | Mil.                |      | Com'l.              |      | Mil.                |      |      |
|              |  |                          | Min. <sup>(2)</sup>   | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. |      |
| tPLH<br>tPHL | Propagation Delay<br>DN to $\overline{ON}$ | CL = 50pF<br>RL = 500Ω   | 1.5                   | 4.3  | 1.5                 | 4.7  | 1.5                 | 3.6  | —                   | —    | ns   |
| tPZH<br>tPZL | Output Enable Time                         |                          | 1.5                   | 5.8  | 1.5                 | 6.5  | 1.5                 | 4.8  | —                   | —    | ns   |
| tPHZ<br>tPLZ | Output Disable Time                        |                          | 1.5                   | 5.2  | 1.5                 | 5.7  | 1.5                 | 4.0  | —                   | —    | ns   |

2565 tbl 10

**SWITCHING CHARACTERISTICS OVER OPERATING RANGE FOR FCT244/2244T**

| Symbol       | Parameter                     | Condition <sup>(1)</sup> | FCT244T<br>FCT2244T |      |                     |      | FCT244AT<br>FCT2244AT |      |                     |      | Unit |
|--------------|-------------------------------|--------------------------|---------------------|------|---------------------|------|-----------------------|------|---------------------|------|------|
|              |                               |                          | Com'l.              |      | Mil.                |      | Com'l.                |      | Mil.                |      |      |
|              |                               |                          | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup>   | Max. | Min. <sup>(2)</sup> | Max. |      |
| tPLH<br>tPHL | Propagation Delay<br>DN to ON | CL = 50pF<br>RL = 500Ω   | 1.5                 | 6.5  | 1.5                 | 7.0  | 1.5                   | 4.8  | 1.5                 | 5.1  | ns   |
| tPZH<br>tPZL | Output Enable Time            |                          | 1.5                 | 8.0  | 1.5                 | 8.5  | 1.5                   | 6.2  | 1.5                 | 6.5  | ns   |
| tPHZ<br>tPLZ | Output Disable Time           |                          | 1.5                 | 7.0  | 1.5                 | 7.5  | 1.5                   | 5.6  | 1.5                 | 5.9  | ns   |

2565 tbl 11

| Symbol       | Parameter                     | Condition <sup>(1)</sup> | FCT244CT<br>FCT2244CT |      |                     |      | FCT244DT            |      |                     |      | Unit |
|--------------|-------------------------------|--------------------------|-----------------------|------|---------------------|------|---------------------|------|---------------------|------|------|
|              |                               |                          | Com'l.                |      | Mil.                |      | Com'l.              |      | Mil.                |      |      |
|              |                               |                          | Min. <sup>(2)</sup>   | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. |      |
| tPLH<br>tPHL | Propagation Delay<br>DN to ON | CL = 50pF<br>RL = 500Ω   | 1.5                   | 4.1  | 1.5                 | 4.6  | 1.5                 | 3.6  | —                   | —    | ns   |
| tPZH<br>tPZL | Output Enable Time            |                          | 1.5                   | 5.8  | 1.5                 | 6.5  | 1.5                 | 4.8  | —                   | —    | ns   |
| tPHZ<br>tPLZ | Output Disable Time           |                          | 1.5                   | 5.2  | 1.5                 | 5.7  | 1.5                 | 4.0  | —                   | —    | ns   |

2565 tbl 12

**NOTES:**

1. See test circuit and waveforms.
2. Minimum limits are guaranteed but not tested on Propagation Delays.

**SWITCHING CHARACTERISTICS OVER OPERATING RANGE FOR FCT540/541/2541 T**

| Symbol       | Parameter                                     | Condition <sup>(1)</sup> | FCT540T/541T<br>FCT2541T |      |                     |      | FCT540AT/541AT<br>FCT2541AT |      |                     |      | FCT540CT/541CT<br>FCT2541CT |      |                     |      | Unit |
|--------------|---|--------------------------|--------------------------|------|---------------------|------|-----------------------------|------|---------------------|------|-----------------------------|------|---------------------|------|------|
|              |   |                          | Com'l.                   |      | Mil.                |      | Com'l.                      |      | Mil.                |      | Com'l.                      |      | Mil.                |      |      |
|              |   |                          | Min. <sup>(2)</sup>      | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup>         | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup>         | Max. | Min. <sup>(2)</sup> | Max. |      |
| tPLH<br>tPHL | Propagation Delay<br>DN to ON<br>FCT540T      | CL = 50pF<br>RL = 500Ω   | 1.5                      | 8.5  | 1.5                 | 9.5  | 1.5                         | 4.8  | 1.5                 | 5.1  | 1.5                         | 4.3  | 1.5                 | 4.7  | ns   |
| tPLH<br>tPHL | Propagation Delay<br>DN to ON<br>FCT541/2541T |                          | 1.5                      | 8.0  | 1.5                 | 9.0  | 1.5                         | 4.8  | 1.5                 | 5.1  | 1.5                         | 4.1  | 1.5                 | 4.6  | ns   |
| tPZH<br>tPZL | Output Enable Time                            |                          | 1.5                      | 10.0 | 1.5                 | 10.5 | 1.5                         | 6.2  | 1.5                 | 6.5  | 1.5                         | 5.8  | 1.5                 | 6.5  | ns   |
| tPHZ<br>tPLZ | Output Disable Time                           |                          | 1.5                      | 9.5  | 1.5                 | 10.0 | 1.5                         | 5.6  | 1.5                 | 5.9  | 1.5                         | 5.2  | 1.5                 | 5.7  | ns   |


**NOTES:**

1. See test circuit and waveforms.
2. Minimum limits are guaranteed but not tested on Propagation Delays.

2565 tbl 13

## TEST CIRCUITS AND WAVEFORMS

### TEST CIRCUITS FOR ALL OUTPUTS

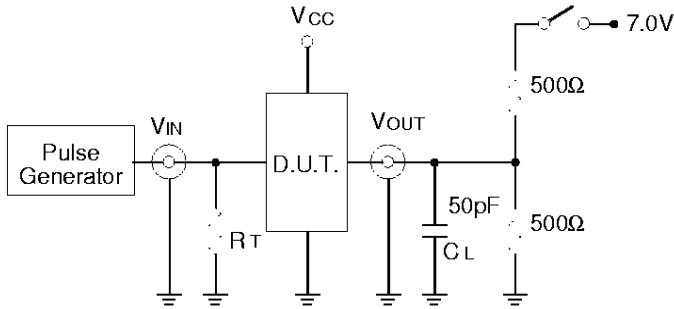

### SWITCH POSITION

| Test                                    | Switch |
|---|--------|
| Open Drain<br>Disable Low<br>Enable Low | Closed |
| All Other Tests                         | Open   |


#### DEFINITIONS:

CL = Load capacitance: includes jig and probe capacitance.


RT = Termination resistance: should be equal to ZOUT of the Pulse Generator.

2565 drw 14


### SET-UP, HOLD AND RELEASE TIMES

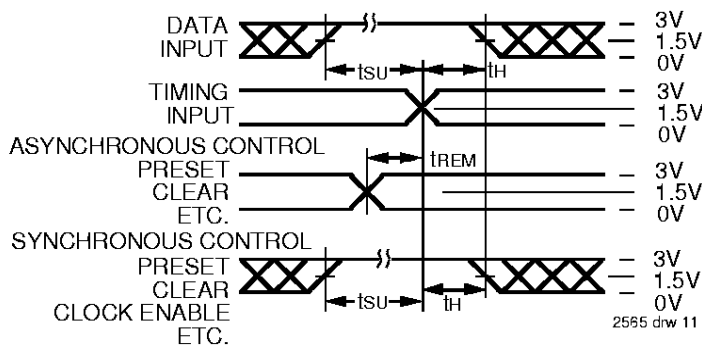


### PULSE WIDTH

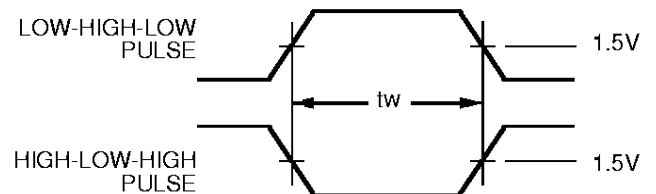

### PROPAGATION DELAY

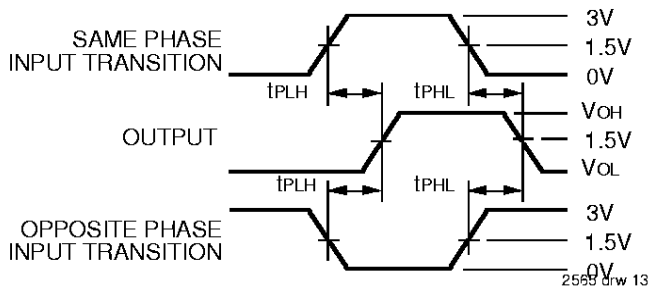

### ENABLE AND DISABLE TIMES

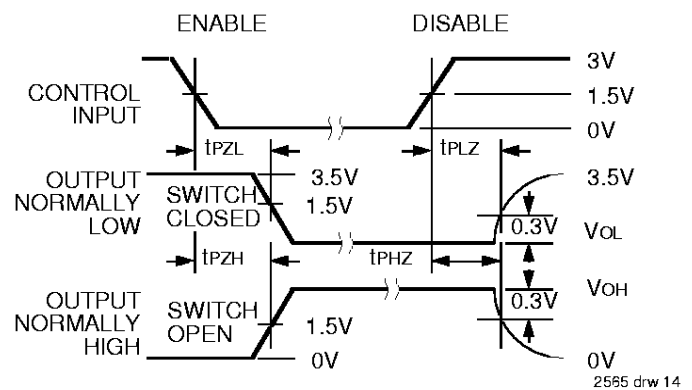

#### NOTES:

1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH
2. Pulse Generator for All Pulses: Rate  $\leq 1.0\text{MHz}$ ;  $t_r \leq 2.5\text{ns}$ ;  $t_f \leq 2.5\text{ns}$



**ORDERING INFORMATION**

| <u>IDT</u>  | <u>XX</u> | <u>FCT</u>  | <u>X</u> | <u>XXXX</u> | <u>X</u> | <u>X</u> |   |
|-------------|-----------|-------------|----------|-------------|----------|----------|---|
| Temp. Range | Family    | Device Type | Package  | Process     |          |          |   |
|             |           |             |          |             |          |          | Blank Commercial                              |
|             |           |             |          |             |          |          | B MIL-STD-883, Class B                        |
|             |           |             |          |             |          |          | P Plastic DIP (P20-1)                         |
|             |           |             |          |             |          |          | D CERDIP (D20-1)                              |
|             |           |             |          |             |          |          | SO Small Outline IC (SO20-2)                  |
|             |           |             |          |             |          |          | L Leadless Chip Carrier (L20-2)               |
|             |           |             |          |             |          |          | E CERPACK (E20-1)                             |
|             |           |             |          |             |          |          | PY Shrink Small Outline Package (SO20-7)      |
|             |           |             |          |             |          |          | Q Quarter-size Small Outline Package (SO20-8) |
|             |           |             |          |             |          |          | PG Thin Shrink Small Outline Package (SO20-9) |
|             |           |             |          |             |          |          | 240T Inverting Octal Buffer/Line Driver       |
|             |           |             |          |             |          |          | 244T Non-Inverting Octal Buffer/Line Driver   |
|             |           |             |          |             |          |          | 540T Non-Inverting Octal Buffer/Line Driver   |
|             |           |             |          |             |          |          | 541T Inverting Octal Buffer/Line Driver       |
|             |           |             |          |             |          |          | 240AT Non-Inverting Octal Buffer/Line Driver  |
|             |           |             |          |             |          |          | 244AT   |
|             |           |             |          |             |          |          | 540AT   |
|             |           |             |          |             |          |          | 541AT   |
|             |           |             |          |             |          |          | 240CT   |
|             |           |             |          |             |          |          | 244CT   |
|             |           |             |          |             |          |          | 540CT   |
|             |           |             |          |             |          |          | 541CT   |
|             |           |             |          |             |          |          | 240DT   |
|             |           |             |          |             |          |          | 244DT   |
|             |           |             |          |             |          |          | Blank High Drive                              |
|             |           |             |          |             |          |          | 2 Balanced Drive                              |
|             |           |             |          |             |          |          | 54 -55°C to +125°C                            |
|             |           |             |          |             |          |          | 74 -40°C to +85°C                             |

2565 drw 15