



54AC/74AC10 • 54ACT/74ACT10 Triple 3-Input NAND Gate

General Description

The 'AC/'ACT10 contains three, 3-input NAND gates.


The information for the ACT10 is Preliminary Information only.

Features



- Outputs source/sink 24 mA
- Standard Military Drawing (SMD)
 - 'AC10: 5962-87610

Ordering Code: See Section 8

Logic Symbol



Connection Diagrams

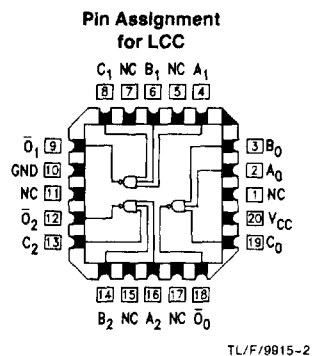

| Pin Names | Description |
|--|-------------|
| A _n , B _n , C _n | Inputs |
| O _n | Outputs |

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|--|--------------------------|
| Supply Voltage (V_{CC}) | -0.5V to +7.0V |
| DC Input Diode Current (I_{IK}) | |
| $V_I = -0.5V$ | -20 mA |
| $V_I = V_{CC} + 0.5V$ | +20 mA |
| DC Input Voltage (V_I) | -0.5V to $V_{CC} + 0.5V$ |
| DC Output Diode Current (I_{OK}) | |
| $V_O = -0.5V$ | -20 mA |
| $V_O = V_{CC} + 0.5V$ | +20 mA |
| DC Output Voltage (V_O) | -0.5V to $V_{CC} + 0.5V$ |
| DC Output Source or Sink Current (I_O) | ±50 mA |
| DC V_{CC} or Ground Current per Output Pin (I_{CC} or I_{GND}) | ±50 mA |
| Storage Temperature (T_{STG}) | -65°C to +150°C |
| Junction Temperature (T_J) | |
| CDIP | 175°C |
| PDIP | 140°C |

Note 1: Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. National does not recommend operation of FACT™ circuits outside databook specifications.

Recommended Operating Conditions

| | | |
|---|--|-----------------|
| Supply Voltage (V_{CC}) | | 2.0V to 6.0V |
| 'AC | | 4.5V to 5.5V |
| 'ACT | | |
| Input Voltage (V_I) | | 0V to V_{CC} |
| Output Voltage (V_O) | | 0V to V_{CC} |
| Operating Temperature (T_A) | | |
| 74AC/ACT | | -40°C to +85°C |
| 54AC/ACT | | -55°C to +125°C |
| Minimum Input Edge Rate ($\Delta V/\Delta t$) | | |
| 'AC Devices | | |
| V_{IN} from 30% to 70% of V_{CC} | | |
| V_{CC} @ 3.3V, 4.5V, 5.5V | | 125 mV/ns |
| Minimum Input Edge Rate ($\Delta V/\Delta t$) | | |
| 'ACT Devices | | |
| V_{IN} from 0.8V to 2.0V | | |
| V_{CC} @ 4.5V, 5.5V | | 125 mV/ns |

DC Characteristics for 'AC Family Devices

| Symbol | Parameter | V_{CC} (V) | 74AC | | | 54AC | | 74AC | | Units | Conditions |
|----------|-----------------------------------|--------------|---------------------------|-------------------|------|--|------|---|----|--|--|
| | | | $T_A = +25^\circ\text{C}$ | | | $T_A = -55^\circ\text{C to } +125^\circ\text{C}$ | | $T_A = -40^\circ\text{C to } +85^\circ\text{C}$ | | | |
| | | | Typ | Guaranteed Limits | | | | | | | |
| V_{IH} | Minimum High Level Input Voltage | 3.0 | 1.5 | 2.1 | 2.1 | | 2.1 | | V | $V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$ | |
| | | 4.5 | 2.25 | 3.15 | 3.15 | | 3.15 | | | | |
| | | 5.5 | 2.75 | 3.85 | 3.85 | | 3.85 | | | | |
| V_{IL} | Maximum Low Level Input Voltage | 3.0 | 1.5 | 0.9 | 0.9 | | 0.9 | | V | $V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$ | |
| | | 4.5 | 2.25 | 1.35 | 1.35 | | 1.35 | | | | |
| | | 5.5 | 2.75 | 1.65 | 1.65 | | 1.65 | | | | |
| V_{OH} | Minimum High Level Output Voltage | 3.0 | 2.99 | 2.9 | 2.9 | | 2.9 | | V | $I_{OUT} = -50 \mu\text{A}$ | |
| | | 4.5 | 4.49 | 4.4 | 4.4 | | 4.4 | | | | |
| | | 5.5 | 5.49 | 5.4 | 5.4 | | 5.4 | | | | |
| | | | 3.0 | | 2.56 | 2.4 | | 2.46 | | V | * $V_{IN} = V_{IL}$ or V_{IH} -12 mA $I_{OH} = -24 \text{ mA}$ -24 mA |
| | | | 4.5 | | 3.86 | 3.7 | | 3.76 | | | |
| | | | 5.5 | | 4.86 | 4.7 | | 4.76 | | | |
| V_{OL} | Maximum Low Level Output Voltage | 3.0 | 0.002 | 0.1 | 0.1 | | 0.1 | | V | $I_{OUT} = 50 \mu\text{A}$ | |
| | | 4.5 | 0.001 | 0.1 | 0.1 | | 0.1 | | | | |
| | | 5.5 | 0.001 | 0.1 | 0.1 | | 0.1 | | | | |
| | | | 3.0 | | 0.36 | 0.5 | | 0.44 | | V | * $V_{IN} = V_{IL}$ or V_{IH} 12 mA $I_{OL} = 24 \text{ mA}$ 24 mA |
| | | | 4.5 | | 0.36 | 0.5 | | 0.44 | | | |
| | | | 5.5 | | 0.36 | 0.5 | | 0.44 | | | |
| I_{IN} | Maximum Input Leakage Current | 5.5 | | ±0.1 | ±1.0 | | ±1.0 | | μA | $V_I = V_{CC}, \text{GND}$ | |

*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

DC Characteristics for 'AC Family Devices (Continued)

| Symbol | Parameter | V _{CC} (V) | 74AC | | 54AC | 74AC | Units | Conditions |
|------------------|----------------------------------|------------------------|------------------------|-------------------|-------------------------------------|------------------------------------|-------|---|
| | | | T _A = +25°C | | T _A = -55°C to +125°C | T _A = -40°C to +85°C | | |
| | | | Typ | Guaranteed Limits | | | | |
| I _{OLD} | †Minimum Dynamic Output Current | 5.5 | | | 50 | 75 | mA | V _{OLD} = 1.65V Max |
| I _{OHD} | | 5.5 | | | -50 | -75 | mA | V _{OHD} = 3.85V Min |
| I _{CC} | Maximum Quiescent Supply Current | 5.5 | | 4.0 | 80.0 | 40.0 | μA | V _{IN} = V _{CC} or GND |

*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

Note: I_{IN} and I_{CC} @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V V_{CC}.

I_{CC} for 54AC @ 25°C is identical to 74AC @ 25°C.

DC Characteristics for 'ACT Family Devices

| Symbol | Parameter | V _{CC} (V) | 74ACT | | 54ACT | 74ACT | Units | Conditions | |
|--------------------|-----------------------------------|------------------------|------------------------|-------------------|-------------------------------------|------------------------------------|-------|--|---|
| | | | T _A = +25°C | | T _A = -55°C to +125°C | T _A = -40°C to +85°C | | | |
| | | | Typ | Guaranteed Limits | | | | | |
| V _{IH} | Minimum High Level Input Voltage | 4.5 | 1.5 | 2.0 | 2.0 | 2.0 | V | V _{OUT} = 0.1V or V _{CC} - 0.1V | |
| | | 5.5 | 1.5 | 2.0 | 2.0 | 2.0 | | | |
| V _{IL} | Maximum Low Level Input Voltage | 4.5 | 1.5 | 0.8 | 0.8 | 0.8 | V | V _{OUT} = 0.1V or V _{CC} - 0.1V | |
| | | 5.5 | 1.5 | 0.8 | 0.8 | 0.8 | | | |
| V _{OH} | Minimum High Level Output Voltage | 4.5 | 4.49 | 4.4 | 4.4 | 4.4 | V | I _{OUT} = -50 μA | |
| | | 5.5 | 5.49 | 5.4 | 5.4 | 5.4 | | | |
| | | | 4.5 | | 3.86 | 3.70 | 3.76 | V | *V _{IN} = V _{IL} or V _{IH} -24 mA I _{OH} -24 mA |
| | | | 5.5 | | 4.86 | 4.70 | 4.76 | | |
| V _{OL} | Maximum Low Level Output Voltage | 4.5 | 0.001 | 0.1 | 0.1 | 0.1 | V | I _{OUT} = 50 μA | |
| | | 5.5 | 0.001 | 0.1 | 0.1 | 0.1 | | | |
| | | | 4.5 | | 0.36 | 0.50 | 0.44 | V | *V _{IN} = V _{IL} or V _{IH} 24 mA I _{OL} 24 mA |
| | | | 5.5 | | 0.36 | 0.50 | 0.44 | | |
| I _{IN} | Maximum Input Leakage Current | 5.5 | | ±0.1 | ±1.0 | ±1.0 | μA | V _I = V _{CC} , GND | |
| I _{CC(T)} | Maximum I _{CC} /Input | 5.5 | 0.6 | | 1.6 | 1.5 | mA | V _I = V _{CC} - 2.1V | |
| I _{OLD} | †Minimum Dynamic Output Current | 5.5 | | | 50 | 75 | mA | V _{OLD} = 1.65V Max | |
| I _{OHD} | | 5.5 | | | -50 | -75 | mA | V _{OHD} = 3.85V Min | |
| I _{CC} | Maximum Quiescent Supply Current | 5.5 | | 4.0 | 80.0 | 40.0 | μA | V _{IN} = V _{CC} or GND | |

*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

Note: I_{CC} for 54ACT @ 25°C is identical to 74ACT @ 25°C.

AC Electrical Characteristics: See Section 2 for Waveforms

| Symbol | Parameter | V _{CC} * (V) | 74AC | | | 54AC | | 74AC | | Units | Fig. No. |
|------------------|-------------------|--------------------------|--|------------|------------|---|-------------|--|-------------|-------|----------|
| | | | T _A = +25°C C _L = 50 pF | | | T _A = -55°C to +125°C C _L = 50 pF | | T _A = -40°C to +85°C C _L = 50 pF | | | |
| | | | Min | Typ | Max | Min | Max | Min | Max | | |
| t _{PLH} | Propagation Delay | 3.3 5.0 | 1.5 1.5 | 6.0 4.5 | 9.5 7.0 | 1.0 1.0 | 11.0 8.5 | 1.0 1.0 | 10.5 8.0 | ns | 2-3,4 |
| t _{PHL} | Propagation Delay | 3.3 5.0 | 1.5 1.5 | 5.5 4.0 | 8.5 6.0 | 1.0 1.0 | 10.0 7.0 | 1.0 1.0 | 10.0 6.5 | ns | 2-3,4 |

*Voltage Range 3.3 is 3.3V ± 0.3V
Voltage Range 5.0 is 5.0V ± 0.5V

AC Electrical Characteristics: See Section 2 for Waveforms

| Symbol | Parameter | V _{CC} * (V) | 74ACT | | | 54ACT | | 74ACT | | Units | Fig. No. |
|------------------|-------------------|--------------------------|--|-----|-----|---|-----|--|------|-------|----------|
| | | | T _A = +25°C C _L = 50 pF | | | T _A = -55°C to +125°C C _L = 50 pF | | T _A = -40°C to +85°C C _L = 50 pF | | | |
| | | | Min | Typ | Max | Min | Max | Min | Max | | |
| t _{PLH} | Propagation Delay | 5.0 | 1.0 | 6.5 | 9.0 | | | 1.0 | 10.0 | ns | 2-3,4 |
| t _{PHL} | Propagation Delay | 5.0 | 1.0 | 6.5 | 9.0 | | | 1.0 | 9.5 | ns | 2-3,4 |

*Voltage Range 5.0 is 5.0V ± 0.5V

Capacitance

| Symbol | Parameter | Typ | Units | Conditions |
|-----------------|-------------------------------|------|-------|------------------------|
| C _{IN} | Input Capacitance | 4.5 | pF | V _{CC} = 5.0V |
| C _{PD} | Power Dissipation Capacitance | 25.0 | pF | V _{CC} = 5.0V |