

SN74ALS1005, SN54ALS1005 HEX INVERTING BUFFERS WITH OPEN-COLLECTOR OUTPUTS

D2661, APRIL 1982 - REVISED MAY 1986

- Buffer Version of 'ALS05
- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability

description

These devices contain six independent inverting buffers. They perform the Boolean function $Y = \bar{A}$. The open-collector outputs require pull-up resistors to perform correctly. They may be connected to other open-collector outputs to implement active-low wired-OR or active-high wired-AND functions. Open-collector devices are often used to generate higher V_{OH} levels.


The SN54ALS1005 is characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ALS1005 is characterized for operation from 0°C to 70°C .

FUNCTION TABLE (each inverter)


INPUT	OUTPUT
A	Y
H	L
L	H

**SN74ALS1005 J PACKAGE
SN74ALS1005 D OR N PACKAGE**

(TOP VIEW)




**SN54ALS1005 FK PACKAGE
(TOP VIEW)**



NC No internal connection


logic diagram (positive logic)

logic symbol†

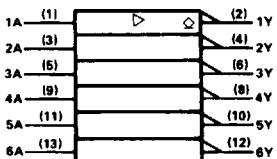

†This symbol is in accordance with ANSI/IEEE Std 91 1984 and IEC Publication 617 12

Pin numbers shown are for D, J, and N packages

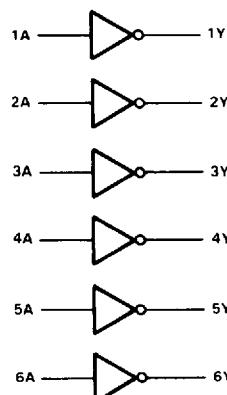

SN74ALS1005, SN54ALS1005

HEX INVERTING BUFFERS WITH OPEN-COLLECTOR OUTPUTS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V _{CC}	7 V
Input voltage	7 V
Off-state output voltage	7 V
Operating free-air temperature range:	SN54ALS1005	-55 °C to 125 °C
	SN74ALS1005	0 °C to 70 °C
Storage temperature range	-65 °C to 150 °C

recommended operating conditions

		SN54ALS1005			SN74ALS1005			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High-level input voltage		2			2		V
V _{IL}	Low-level input voltage			0.7			0.8	V
V _{OH}	High-level output voltage			5.5			5.5	V
I _{OL}	Low-level output current			12			24	mA
T _A	Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54ALS1005			SN74ALS1005			UNIT
		MIN	TYP†	MAX	MIN	TYP†	MAX	
V_{IK}	$V_{CC} = 4.5\text{ V},$ $I_I = -18\text{ mA}$			-1.5			-1.5	V
	$V_{CC} = 4.5\text{ V},$ $V_{DH} = 5.5\text{ V}$			0.1			0.1	
$ I_{OH} $	$V_{CC} = 4.5\text{ V},$ $I_{OL} = 12\text{ mA}$		0.25	0.4		0.25	0.4	mA
	$V_{CC} = 4.5\text{ V},$ $I_{OL} = 24\text{ mA}$					0.35	0.5	
V_{OL}	$V_{CC} = 4.5\text{ V},$ $I_I = 7\text{ V}$			0.1			0.1	mA
	$V_{CC} = 5.5\text{ V},$ $V_I = 2.7\text{ V}$			20			20	μA
$ I_I $	$V_{CC} = 5.5\text{ V},$ $V_I = 0.4\text{ V}$			-0.1			-0.1	mA
	$V_{CC} = 5.5\text{ V},$ $V_I = 0\text{ V}$		0.9	3		0.9	3	
$ I_{CH} $	$V_{CC} = 5.5\text{ V},$ $V_I = 4.5\text{ V}$			7	12		7	mA
	$V_{CC} = 5.5\text{ V},$ $V_I = 4.5\text{ V}$					7	12	
$ I_{CL} $	$V_{CC} = 5.5\text{ V},$ $V_I = 4.5\text{ V}$							mA

[†]All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$

switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$, $C_L = 50 \text{ pF}$, $R_L = 680 \Omega$, $T_A = \text{MIN to MAX}$				UNIT	
			SN54ALS1005		SN74ALS1005			
			MIN	MAX	MIN	MAX		
			5	35	5	30		
t_{PLH}	A	Y	2	12	2	10	ns	
t_{PHL}								

NOTE 1. Load circuit and voltage waveforms are shown in Section 1.

