


**Octal transceiver (3-State)****74ALS245A/74ALS245A-1****FEATURES**

- Octal bidirectional bus interface
- 3-State buffer outputs sink 24mA and source 15mA
- Outputs are placed in high impedance state during power-off conditions
- The -1 version sinks 48mA

**DESCRIPTION**

The 74ALS245A is an octal transceiver featuring non-inverting 3-State bus compatible outputs in both transmit and receive directions. The device features an output enable ( $\bar{OE}$ ) input for easy cascading and transmit/receive ( $T/R$ ) input for direction control.

The 74ALS245A-1 is the same as the 74ALS245A except that both ports sink 48mA within the  $\pm 5\%$   $V_{CC}$  range.

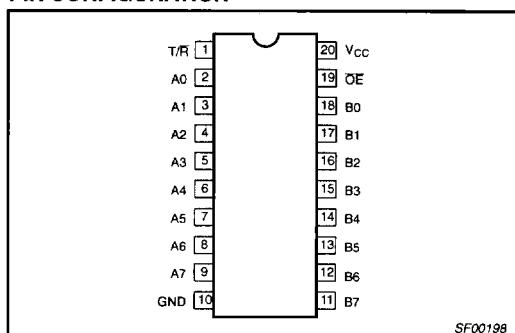**PIN CONFIGURATION**

SF00198

**ORDERING INFORMATION**

DESCRIPTION	ORDER CODE	DRAWING NUMBER
	COMMERCIAL RANGE $V_{CC} = 5V \pm 10\%$ , $T_{amb} = 0^\circ C$ to $+70^\circ C$	
20-pin plastic DIP	74ALS245AN, 74ALS245A-1N	SOT146-1
20-pin plastic SOL	74ALS245AD, 744ALS245A-1D	SOT163-1
20-pin plastic SSOP Type II	74ALS245ADB, 74ALS245A-1DB	SOT339-1

**INPUT AND OUTPUT LOADING AND FAN-OUT TABLE**


PINS	DESCRIPTION	74ALS (U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
A0 – A7, B0 – B7	Data inputs	1.0/1.0	20 $\mu$ A/0.1mA
$\bar{OE}$	Output Enable input (active-Low)	1.0/1.0	20 $\mu$ A/0.1mA
T/R	Transmit/receive input	1.0/1.0	20 $\mu$ A/0.1mA
A0 – A7	A port outputs	750/240	15mA/24mA
B0 – B7	B port outputs	750/240	15mA/24mA
A0 – A7	A port outputs (-1 version)	750/480	15mA/48mA
B0 – B7	B port outputs (-1 version)	750/480	15mA/48mA

NOTE: One (1.0) ALS unit load is defined as: 20 $\mu$ A in the High state and 0.1mA in the Low state.


## Octal transceiver (3-State)

## 74ALS245A/74ALS245A-1


## LOGIC SYMBOL

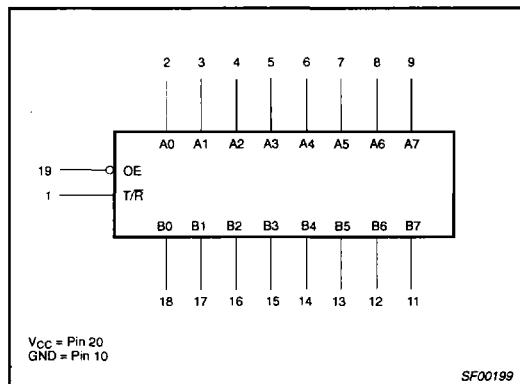

## IEC/IEEE SYMBOL

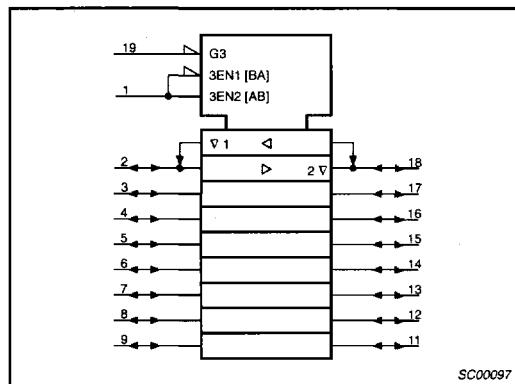

## LOGIC DIAGRAM

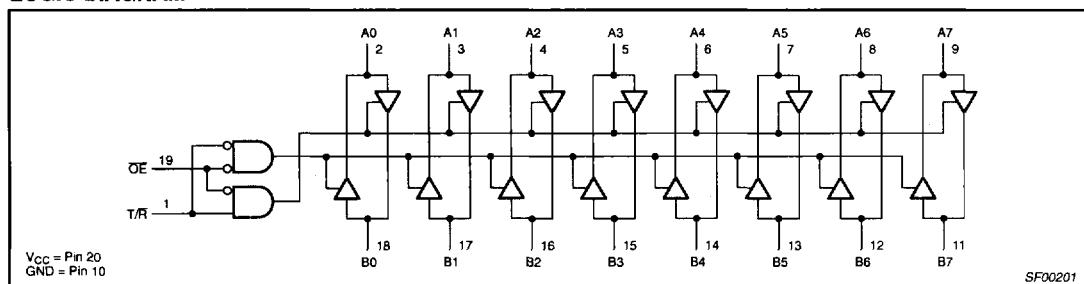

## FUNCTION TABLE

INPUTS		OUTPUTS
OE	T/R	
L	L	Bus B data to Bus A
L	H	Bus A data to Bus B
H	X	Z

H = High voltage level

L = Low voltage level

X = Don't care

Z = High impedance "off" state

## Octal transceiver (3-State)

## 74ALS245A/74ALS245A-1

**ABSOLUTE MAXIMUM RATINGS**

(Operation beyond the limit set forth in this table may impair the useful life of the device.  
Unless otherwise noted these limits are over the operating free air temperature range.)

SYMBOL	PARAMETER	RATING	UNIT
$V_{CC}$	Supply voltage	-0.5 to +7.0	V
$V_{IN}$	Input voltage	-0.5 to +7.0	V
$I_{IN}$	Input current	-30 to +5	mA
$V_{OUT}$	Voltage applied to output in High output state	-0.5 to $V_{CC}$	V
$I_{OUT}$	Current applied to output in Low output state	All versions	48
		-1 version	96
$T_{amb}$	Operating free-air temperature range	0 to +70	°C
$T_{stg}$	Storage temperature range	-65 to +150	°C

**RECOMMENDED OPERATING CONDITIONS**

SYMBOL	PARAMETER	LIMITS			UNIT
		MIN	NOM	MAX	
$V_{CC}$	Supply voltage	4.5	5.0	5.5	V
$V_{IH}$	High-level input voltage	2.0			V
$V_{IL}$	Low-level input voltage			0.8	V
$I_{IK}$	Input clamp current			-18	mA
$I_{OH}$	High-level output current			-15	mA
$I_{OL}$	Low-level output current	All versions		24	mA
		-1 version		48 <sup>1</sup>	mA
$T_{amb}$	Operating free-air temperature range	0		+70	°C

**NOTES:**

1. The 48mA limit applies only under the condition of  $V_{CC} = 5.0V \pm 5\%$ .

## Octal transceiver (3-State)

## 74ALS245A/74ALS245A-1

## DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER	TEST CONDITIONS <sup>1</sup>		LIMITS			UNIT
		MIN	TYP <sup>2</sup>	MAX			
$V_{OH}$	High-level output voltage	$V_{CC} \pm 10\%$ , $V_{IL} = MAX$ , $V_{IH} = MIN$	$I_{OH} = -0.4mA$	$V_{CC} - 2$			V
		$V_{CC} = MIN$ , $V_{IL} = MAX$ , $V_{IH} = MIN$	$I_{OH} = -3mA$	2.4	3.2		V
$V_{OL}$	Low-level output voltage	$V_{CC} = MIN$ , $V_{IL} = MAX$ , $V_{IH} = MIN$	$I_{OL} = -15mA$	2.0			V
		All versions	$I_{OL} = 12mA$		0.25	0.40	V
	-1 version	$V_{CC} = 4.75V$ , $V_{IL} = MAX$ , $V_{IH} = MIN$	$I_{OL} = 24mA$		0.35	0.50	V
		$V_{CC} = 4.75V$ , $V_{IL} = MAX$ , $V_{IH} = MIN$	$I_{OL} = 48mA$		0.35	0.50	V
$V_{IK}$	Input clamp voltage	$V_{CC} = MIN$ , $I_I = I_{IK}$			-0.73	-1.5	V
$I_I$	Input current at maximum input voltage A or B ports	$\text{OE or T/R}$	$V_{CC} = MAX$ , $V_I = 7.0V$			0.1	mA
			$V_{CC} = MAX$ , $V_I = 5.5V$			0.1	mA
$I_{IH}$	High-level input current <sup>3</sup>	$V_{CC} = MAX$ , $V_I = 2.7V$				20	$\mu A$
$I_{IL}$	Low-level input current <sup>3</sup>	$V_{CC} = MAX$ , $V_I = 0.4V$				-0.1	mA
$I_O$	Output current <sup>4</sup>	$V_{CC} = MAX$ , $V_O = 2.25V$		-30		-112	mA
$I_{CC}$	Supply current (total)	$I_{CCH}$	$V_{CC} = MAX$		28	45	mA
		$I_{CCL}$			40	55	mA
		$I_{CCZ}$			44	58	mA

## NOTES:

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- All typical values are at  $V_{CC} = 5V$ ,  $T_{amb} = 25^{\circ}C$ .
- For I/O ports, the parameter  $I_{IH}$  and  $I_{IL}$  include the off-state current.
- The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current,  $I_{OS}$ .


## AC ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	LIMITS		UNIT	
			$T_{amb} = 0^{\circ}C$ to $+70^{\circ}C$ $V_{CC} = +5.0V \pm 10\%$ $C_L = 50pF$ , $R_L = 500\Omega$			
			MIN	MAX		
$t_{PLH}$	Propagation delay An to Bn, Bn to An	Waveform 1	2.0 2.0	10.0 10.0	ns	
$t_{PZH}$	Output enable time to High or Low level	Waveform 2 Waveform 3	3.0 3.0	20.0 20.0	ns	
$t_{PLZ}$	Output disable time from High or Low level	Waveform 2 Waveform 3	2.0 4.0	10.0 15.0	ns	


## Octal transceiver (3-State)

74ALS245A/74ALS245A-1


## AC WAVEFORMS

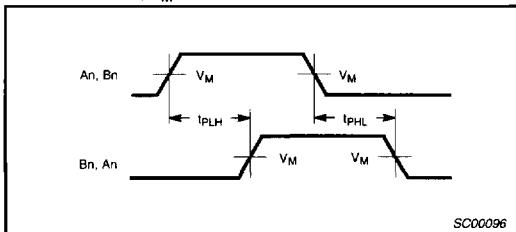For all waveforms,  $V_M = 1.3V$ .

Waveform 1. Propagation Delay for Non-inverting Outputs

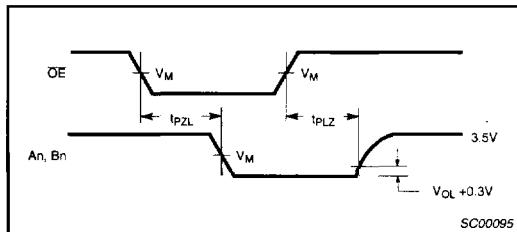

Waveform 3. 3-State Output Enable Time to Low Level and Output Disable Time from Low Level

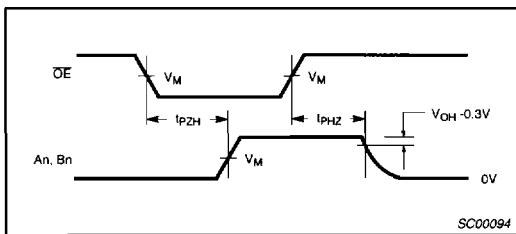

Waveform 2. 3-State Output Enable Time to High Level and Output Disable Time from High Level

## TEST CIRCUIT AND WAVEFORMS

