



4066

CMOS IC

QUAD BILATERAL SWITCH

DESCRIPTION


The UTC **4066** is a quad bilateral switch intended for the transmission or multiplexing of analog or digital signals.

FEATURES

- * Wide supply voltage range: 3V ~ 15V.
- * High noise immunity : 0.45V_{DD} (typ.)
- * Wide range of digital and ± 7.5V_{PEAK} analog switching
- * "ON" resistance for 15V operation : 80Ω
- * Matched "ON" resistance : ΔR_{ON}=5Ω (typ.) over 15V signal input
- * "ON" resistance flat over peak-to-peak signal range
- * High "ON" / "OFF" : 65 dB (typ.)
- output voltage ratio @ f_{IS}=10kHz, R_L=10kΩ
- * High degree linearity: 0.1% distortion (typ.)
@ f_{IS}=1kHz, V_{IS}=5Vp-p.
V_{DD}-V_{SS}=10V, R_L=10kΩ
- * Extremely low "OFF" : 0.1nA (typ.)
switch leakage @V_{DD}-V_{SS}=10V, T_A=25°C
- * Extremely high control input impedance : 10¹²Ω (typ.)
- * Low crosstalk : -50dB (typ.)
between switches @ f_{IS}=0.9MHz, R_L=1kΩ
- * Frequency response, switch "ON" : 40MHz (typ.)


ORDERING INFORMATION

| Ordering Number | | Package | Packing |
|-----------------|--------------|----------|-----------|
| Lead Free | Halogen Free | | |
| 4066L-D14-T | 4066G-D14-T | DIP-14 | Tube |
| 4066L-S14-R | 4066G-S14-R | SOP-14 | Tape Reel |
| 4066L-S14-T | 4066G-S14-T | SOP-14 | Tube |
| 4066L-P14-R | 4066G-P14-R | TSSOP-14 | Tape Reel |
| 4066L-P14-T | 4066G-P14-T | TSSOP-14 | Tube |

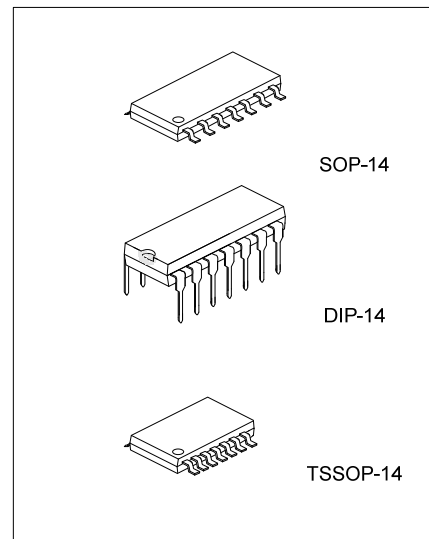


| | |
|--|--|
| <p>4066L-D14-T</p> <p>(1)Packing Type (2)Package Type (3)Lead Free</p> | <p>(1) R: Tape Reel, T: Tube (2) D14: DIP-14, S14: SOP-14, P14: TSSOP-14 (3) G: Halogen Free, L: Lead Free</p> |
|--|--|

■ PIN CONFIGURATION

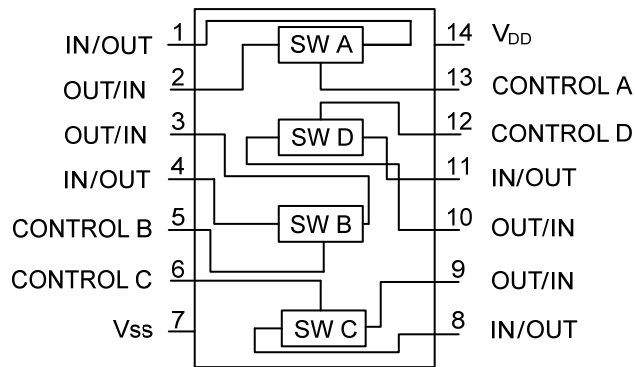

■ SCHEMATIC DIAGRAM

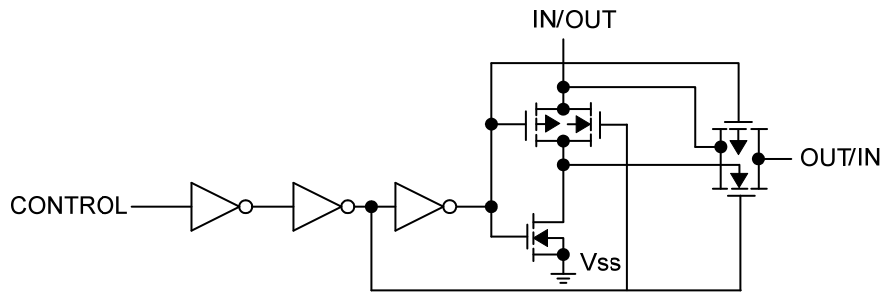

■ ABSOLUTE MAXIMUM RATINGS ($V_{SS}=0V$, unless otherwise specified)

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|----------------------|------------------|-----------|---------------------|------|
| Supply Voltage | | V_{DD} | -0.5 ~ +18 | V |
| Input Voltage | | V_{IN} | -0.5 ~ $V_{CC}+0.5$ | V |
| Power Dissipation | DIP-14 | P_D | 700 | mW |
| | SOP-14/ TSSOP-14 | | 500 | |
| Junction Temperature | | T_J | +125 | °C |
| Storage Temperature | | T_{STG} | -40 ~ +150 | °C |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS ($V_{SS}=0V$, unless otherwise specified)

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|-----------------------------|--|-----------|--------------|------|
| Supply Voltage | | V_{DD} | 3 ~ 15 | V |
| Input Voltage | | V_{IN} | 0 ~ V_{DD} | V |
| Operating Temperature Range | | T_{OPR} | -40 ~ +85 | °C |

■ DC ELECTRICAL CHARACTERISTICS ($V_{SS}=0V$, unless otherwise specified)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNIT |
|--|-----------------|---|--------------|---------------|-----------|----------|
| Quiescent Device Current | I_{DD} | $V_{DD}=5V$ | | 0.01 | 1.0 | μA |
| | | $V_{DD}=10V$ | | 0.01 | 2.0 | |
| | | $V_{DD}=15V$ | | 0.01 | 4.0 | |
| SIGNAL INPUTS AND OUTPUTS | | | | | | |
| Input or Output Leakage Switch "OFF" | I_{IS} | $V_C=0$ | | ± 0.1 | ± 50 | nA |
| "ON" Resistance | R_{ON} | $R_L=10k\Omega \sim (V_{DD}-V_{SS}/2)$ $V_C=V_{DD}, V_{SS} \sim V_{DD}$ | $V_{DD}=5V$ | 270 | 1050 | Ω |
| | | | $V_{DD}=10V$ | 120 | 400 | |
| | | | $V_{DD}=15V$ | 80 | 240 | |
| Δ "ON" Resistance Between Any 2 of 4 Switches | ΔR_{ON} | $R_L=10k\Omega \sim (V_{DD}-V_{SS}/2)$ $V_C=V_{DD}, V_{IS}=V_{SS} \sim V_{DD}$ | $V_{DD}=10V$ | 10 | | Ω |
| | | | $V_{DD}=15V$ | 5 | | |
| CONTROL INPUTS | | | | | | |
| Low Level Input Voltage | V_{ILC} | $V_{IS}=V_{SS}$ and V_{DD} $V_{OS}=V_{DD}$ and V_{SS} $I_{IS}=\pm 10\mu A$ | $V_{DD}=5V$ | 2.25 | 1.5 | V |
| | | | $V_{DD}=10V$ | 4.5 | 3.0 | |
| | | | $V_{DD}=15V$ | 6.75 | 4.0 | |
| HIGH Level Input Voltage | V_{IHC} | $V_{DD}=5V$ | 3.5 | 2.75 | V | |
| | | $V_{DD}=10V$ (Note) | 7.0 | 5.5 | | |
| | | $V_{DD}=15V$ | 11.0 | 8.25 | | |
| Input Current | I_{IN} | $V_{DD}-V_{SS}=15V, V_{DD} \geq V_{IS} \geq V_{SS},$ $V_{DD} \geq V_C \geq V_{SS}$ | | $\pm 10^{-5}$ | ± 0.3 | μA |

Note: Conditions for V_{IHC} : (a) $V_{IS}=V_{DD}$, I_{OS} =standard B series I_{OH} . (b) $V_{IS}=0V$, I_{OL} =standard B series I_{OL}

■ AC ELECTRICAL CHARACTERISTICS (AC Parameters are guaranteed by DC correlated testing)

($T_A=25^\circ\text{C}$, $t_R=t_F=20\text{ ns}$ and $V_{SS}=0\text{V}$ unless otherwise)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--------------------|--|----------------------|------|-----|-------------------|
| Propagation Delay Time Signal Input to Signal Output | T_{PHL}, T_{PLH} | $V_C=V_{DD}, C_L=50\text{Pf}$ (Figure1) $R_L=200\text{k}$ | $V_{DD}=5\text{V}$ | 25 | 55 | ns |
| | | | $V_{DD}=10\text{V}$ | 15 | 35 | |
| | | | $V_{DD}=15\text{V}$ | 10 | 25 | |
| Propagation Delay Time Control Input to Signal Output High Impedance to Logical Level | t_{PZH}, t_{PLZ} | $R_L=1.0\text{k}\Omega, C_L=50\text{pF}$ (Fig. 2, 3) | $V_{DD}=5\text{V}$ | | 125 | ns |
| | | | $V_{DD}=10\text{V}$ | | 60 | |
| | | | $V_{DD}=15\text{V}$ | | 50 | |
| Propagation Delay Time Control Input to Signal Output Logical Level to High Impedance | | $R_L=1.0\text{k}\Omega, C_L=50\text{pF}$ (Fig. 2, 3) | $V_{DD}=5\text{V}$ | | 125 | ns |
| | | | $V_{DD}=10\text{V}$ | | 60 | |
| | | | $V_{DD}=15\text{V}$ | | 50 | |
| Sine Wave Distortion | t_{PHZ}, t_{PLZ} | $V_C=V_{DD}=5\text{V}, V_{SS}=-5\text{V}$ $R_L=10\text{k}\Omega, V_{IS}=5\text{V}_{P-P}, f=1\text{kHz}$, (Fig. 4) | | 0.1 | | % |
| Frequency Response - Switch "ON" (Frequency at -3dB) | | $V_C=V_{DD}=5\text{V}, V_{SS}=-5\text{V}$ $R_L=1\text{k}\Omega, V_{IS}=5\text{V}_{P-P}$ $20\text{ Log}_{10} V_{OS}/V_{OS} (1\text{kHz})\text{-dB}$ (Fig. 4) | | 40 | | MHz |
| Feedthrough - Switch "OFF" (Frequency at -50 dB) | | $V_{DD}=5.0\text{V}, V_{CC}=V_{SS}=-5.0\text{V}, R_L=1\text{k}\Omega,$ $V_{IS}=5.0\text{V}_{P-P}, 20\text{Log}_{10}, V_{OS}/V_{IS}=-50\text{dB}$, (Fig. 4) | | 1.25 | | MHz |
| Crosstalk Between Any Two Switches(Frequency at -50dB) | | $V_{DD}=V_C(A)=5.0\text{V}; V_{SS}=V_C(B)=5.0\text{V},$ $R_L=1\text{k}\Omega, V_{IS}(A)=5.0\text{V}_{P-P}, 20\text{Log}_{10},$ $V_{OS}(B)/V_{IS}(A)=-50\text{dB}$ (Fig. 5) | | 0.9 | | MHz |
| Crosstalk; Control Input to Signal Output | | $V_{DD}=10\text{V}, R_L=10\text{k}\Omega, R_{IN}=1.0\text{k}\Omega,$ $V_{CC}=10\text{V}$ Square Wave, $C_L=50\text{pF}$ (Fig. 6) | | 150 | | mV_{P-P} |
| Maximum Control Input | | $R_L=1.0\text{k}\Omega, C_L=50\text{pF}$ (Fig. 7) $V_{OS}(f) = 1/2V_{OS} (1.0\text{kHz})$ | $V_{DD}=5.0\text{V}$ | 6.0 | | MHz |
| | | | $V_{DD}=10\text{V}$ | 8.0 | | |
| | | | $V_{DD}=15\text{V}$ | 8.5 | | |
| Signal Input Capacitance | C_{IS} | | | 8.0 | | pF |
| Signal Output Capacitance | C_{OS} | $V_{DD}=10\text{V}$ | | 8.0 | | pF |
| Feedthrough Capacitance | C_{IOS} | $V_C=0\text{V}$ | | 0.5 | | pF |
| Control Input Capacitance | C_{IN} | | | 5.0 | 7.5 | pF |

■ SPECIAL CONSIDERATIONS

In applications where separate power sources are used to drive V_{DD} and the signal input, the V_{DD} current capability should exceed V_{DD}/R_L (R_L =effective external load of the UTC 4066 bilateral switches).This provision avoids any permanent current flow or clamp action of the V_{DD} supply when power is applied or removed from UTC 4066.

In certain applications, the external load-resistor current may include both V_{DD} and Signal-line components. To avoid drawing V_{DD} current when switch current flows into terminals 1,4,8 or 11,the voltage drop across the bidirectional swith must not exceed 0.6V at $T_A \leq 25^\circ C$, or 0.4V at $T_A > 25^\circ C$ (calculated from R_{ON} values shown).

NO V_{DD} current will flow through R_L if the switch current flows into terminals 2, 3, 9 or 10.

■ AC TEST CIRCUITS AND SWITCHING TIME WAVEFORMS

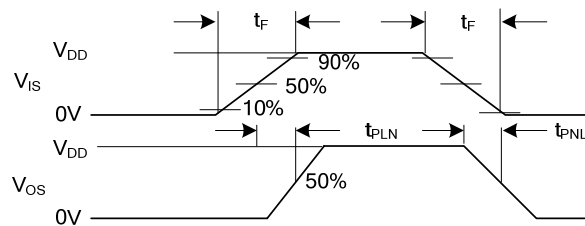
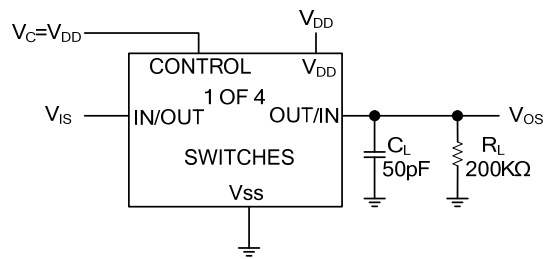


Fig.1 t_{PHL} , t_{PLH} Propagation Delay Time Signal Input to Signal Output

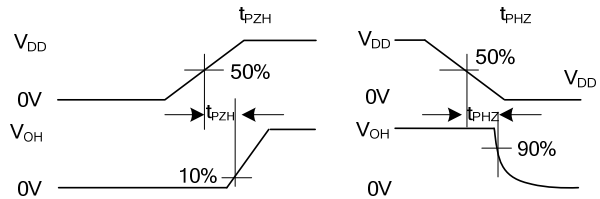
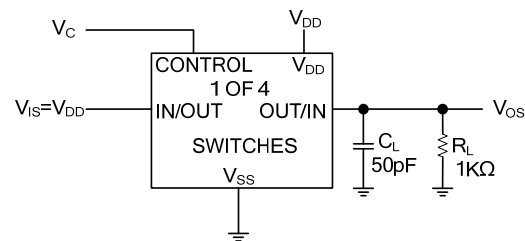


Fig. 2 t_{PZH} , t_{PHZ} Propagation Delay Time Control to Signal Output




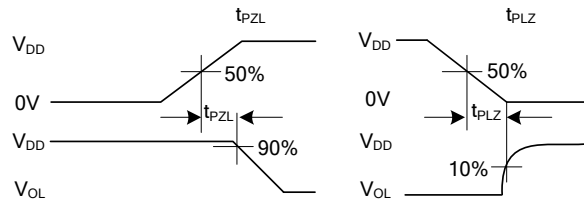


Fig. 3 t_{PZL} , t_{PLZ} Propagation Delay Time Control to Signal Output

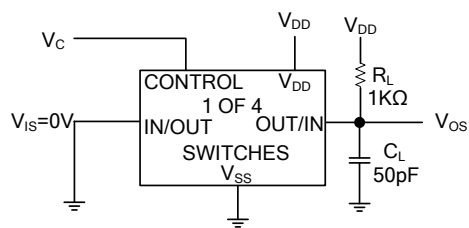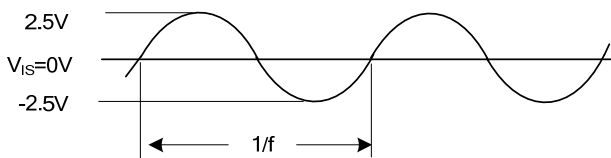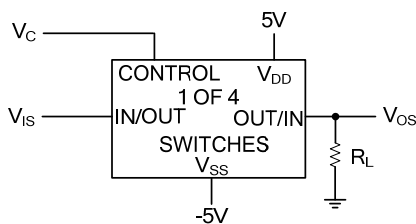

$V_C=V_{DD}$ for distortion and frequency response tests
 $V_C=V_{SS}$ for feedthrough test

Fig. 4 Sine Wave Distortion, Frequency Response and Feedthrough

■ AC TEST CIRCUITS AND SWITCHING TIME WAVEFORMS(Cont.)

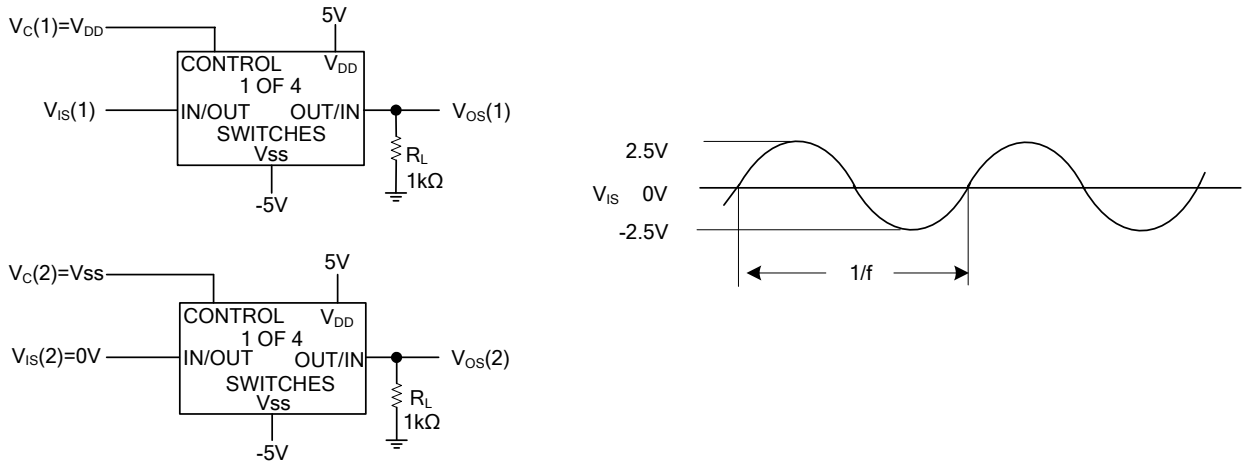


Fig. 5 Crosstalk Between Any Two Switches

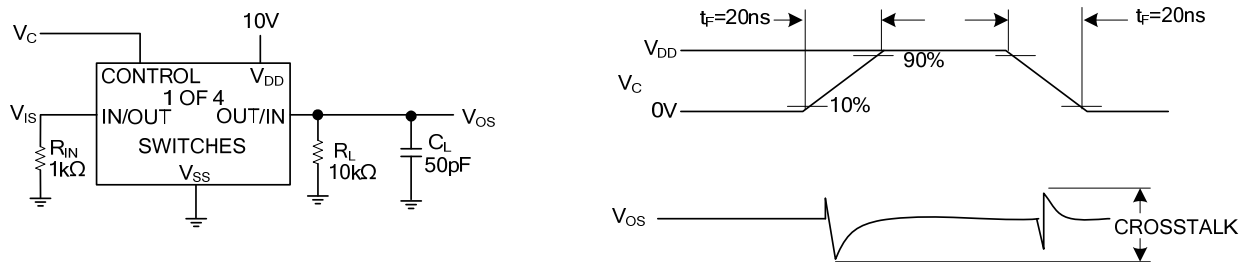


Fig.6 Crosstalk: Control Input to Signal Output


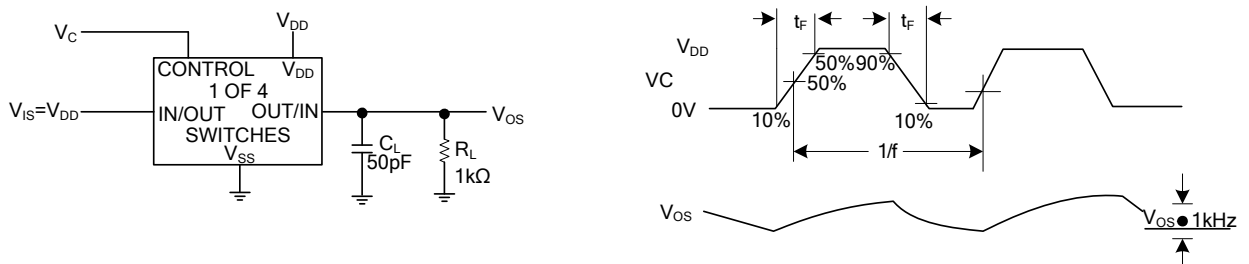



Fig. 7 Maximum Control Input Frequency

■ TYPICAL PERFORMANCE CHARACTERISTICS


“ON” Resistance vs Signal Voltage for $T_A=25^\circ\text{C}$

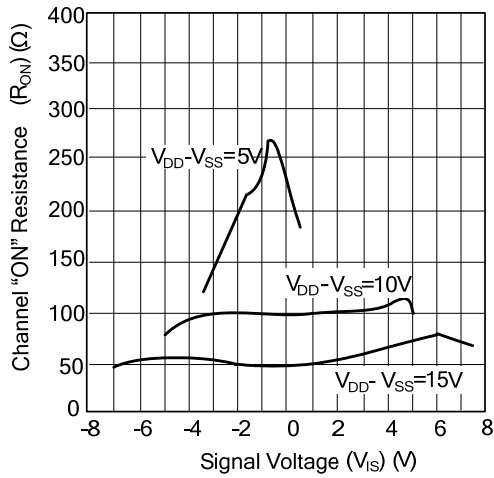


“ON” Resistance as a Function of temperature for $V_{DD}-V_{SS}=15\text{V}$

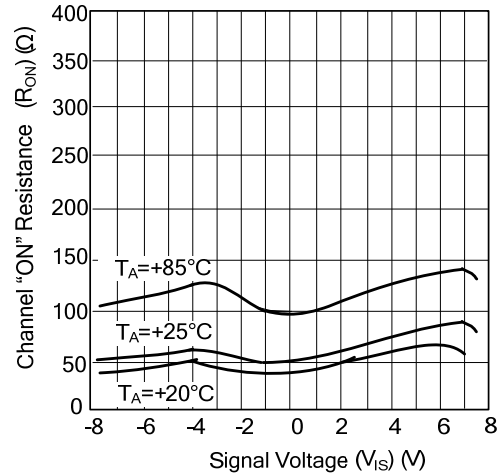

“ON” Resistance as a Function of Temperature for $V_{DD}-V_{SS}=10\text{V}$

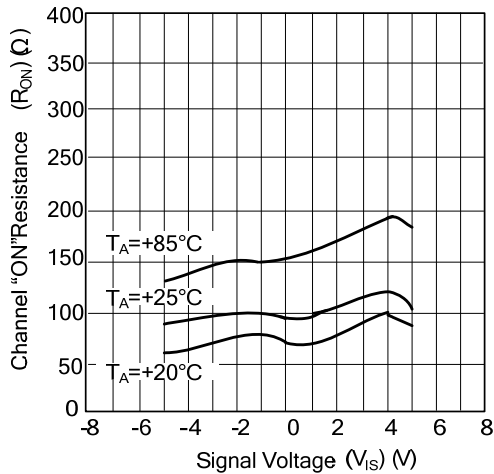

“ON” Resistance as a Function of Temperature for $V_{DD}-V_{SS}=15\text{V}$

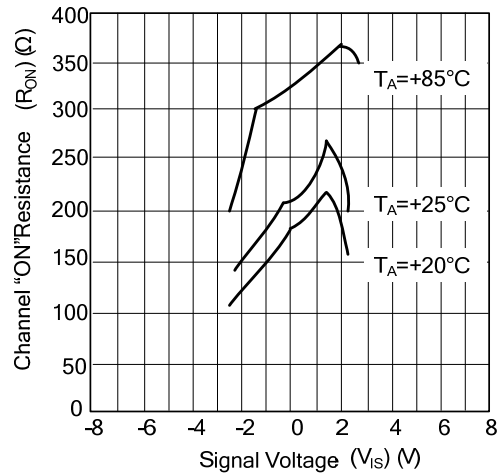

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.