

# GD54/74HC11, GD54/74HCT11

## TRIPLE 3-INPUT AND GATES


### General Description

These devices are identical in pinout to the 54/74LS11. They contain three independent 3-input AND gates. These devices are characterized for operation over wide temperature ranges to meet industry and military specifications.

### Features

- Low Power consumption characteristic of CMOS devices
- Output drive capability: 10 LS TTL Loads Min.
- Operating speed superior to LS TTL
- Wide operating voltage range: for HC 2 to 6 volts for HCT 4.5 to 5.5 volts
- Low input current: 1 $\mu$ A Max.
- Low quiescent current: 20 $\mu$ A Max. (74HC)
- High noise immunity characteristic of CMOS
- Diode protection on all inputs

### Pin Configuration

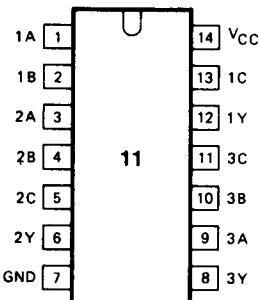

Suffix-Blank : Plastic Dual In Line Package  
Suffix-J : Ceramic Dual In Line Package  
Suffix-D : Small Outline Package

### Logic Symbol and Diagram

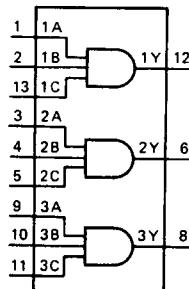


Fig. 1 Logic symbol

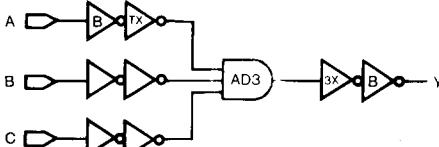


Fig. 2 Logic diagram (one gate)

### Function Table

INPUT			OUTPUT
nA	nB	nC	nY
L	L	L	L
L	L	H	L
L	H	L	L
L	H	H	L
H	L	L	L
H	L	H	L
H	H	L	L
H	H	H	H

H=HIGH Voltage level

L=LOW Voltage level

**Absolute Maximum Ratings**

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{CC}$	DC Supply voltage		-0.5	+7	V
$I_{IK}, I_{OK}$	DC input or output diode current	for $V_i < -0.5$ or $V_i > V_{CC} + 0.5V$		20	mA
$I_O$	DC output source or sink current	for $-0.5V < V_O < V_{CC} + 0.5V$		25	mA
$I_{CC}$	DC $V_{CC}$ or GND current			50	mA
$T_{stg}$	Storage temperature range		-65	150	°C
$P_D$	Power dissipation per package	above +70°C: derate linearly with 8mW/K		500	mW
$T_L$	Lead temperature	At distance $1/16 \pm 1/32$ in. from case for 60 sec(CERAMIC) 10 sec(PLASTIC)		300 260	°C

**Recommended Operating Conditions**

CHARACTERISTIC	LIMITS		UNITS
	MIN.	MAX.	
Supply-Voltage Range $V_{CC}$ : GD54/74HC Types GD54/74HCT Types	2 4.5	6 5.5	V
DC Input or Output Voltage $V_I, V_O$	0	$V_{CC}$	V
Operating Temperature $T_A$ : GD74 Types GD54 Types	-40 -55	+85 +125	°C
Input Rise and Fall times $t_r, t_f$ : GD54/74HC Types at 2V at 4.5V at 6V GD54/74HCT Types at 4.5V		1000 500 400 500	ns

**DC Electrical Characteristics for HC**

SYMBOL	PARAMETER	TEST CONDITION	V <sub>CC</sub> (V)	T <sub>A</sub> =25°C			GD74HC11		GD54HC11		UNIT
				MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.	
V <sub>IH</sub>	HIGH level input Voltage			2.0 4.5 6.0	1.5 3.15 4.2			1.5 3.15 4.2	1.5 3.15 4.2		V
V <sub>IL</sub>	LOW level input voltage			2.0 4.5 6.0			0.3 0.9 1.2		0.3 0.9 1.2		V
V <sub>OH</sub>	HIGH level output voltage	V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OH</sub> =-20μA	2.0 4.5 6.0	1.9 4.4 5.9	2.0 4.5 6.0		1.9 4.4 5.9	1.9 4.4 5.9		V
			I <sub>OH</sub> =-4mA I <sub>OH</sub> =-5.2mA	4.5 6.0	3.98 5.48	4.3 5.2		3.84 5.34	3.7 5.2		
V <sub>OL</sub>	LOW level output voltage	V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OL</sub> =20μA	2.0 4.5 6.0			0.1 0.1 0.1		0.1 0.1 0.1		V
			I <sub>OL</sub> =4mA I <sub>OL</sub> =5.2mA	4.5 6.0		0.17 0.15	0.26 0.26		0.33 0.33		
I <sub>IN</sub>	Input leakage Current	V <sub>IN</sub> =V <sub>CC</sub> or GND	6.0				0.1		1.0		1.0 μA
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> =V <sub>CC</sub> or GND I <sub>out</sub> =0μA	6.0				2		20		40 μA

**DC Electrical Characteristics for HCT**

SYMBOL	PARAMETER	TEST CONDITION	V <sub>CC</sub> (V)	T <sub>A</sub> =25°C			GD74HCT11		GD54HCT11		UNIT
				MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.	
V <sub>IH</sub>	HIGH level input Voltage		4.5 to 5.5	2.0			2.0		2.0		V
V <sub>IL</sub>	LOW level input voltage		4.5 to 5.5				0.8		0.8		0.8 V
V <sub>OH</sub>	HIGH level output voltage	V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OH</sub> =-20μA	4.5	4.4	4.5		4.4		4.4	V
			I <sub>OH</sub> =-4mA	4.5	3.98	4.3		3.84		3.7	
V <sub>OL</sub>	LOW level output voltage	V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OL</sub> =20μA	4.5			0.1		0.1		V
			I <sub>OL</sub> =4mA	4.5		0.17	0.26		0.33		
I <sub>IN</sub>	Input leakage Current	V <sub>IN</sub> =V <sub>CC</sub> or GND	5.5				0.1		1.0		1.0 μA
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> =V <sub>CC</sub> or GND I <sub>out</sub> =0μA	5.5				2		20		40 μA


## AC Characteristics for HC: $t_r=t_f=6\text{ns}$ $C_L=50\text{pF}$

SYMBOL	PARAMETER	$V_{CC}$ (V)	$T_A=25^\circ C$			GD74HC11		GD54HC11		UNIT
			MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.	
$t_{PLH}/t_{PHL}$	Propagation delay time nA, nB, nC to nY	2.0		30	98		120		150	ns
		4.5		11	19		24		29	
		6.0		9	16		20		25	
$t_{TLH}/t_{THL}$	Output transition time	2.0		19	75		95		110	ns
		4.5		7	15		19		22	
		6.0		6	13		16		19	

## AC Characteristics for HCT: $t_r=t_f=6\text{ns}$ $C_L=50\text{pF}$

SYMBOL	PARAMETER	$V_{CC}$ (V)	$T_A=25^\circ C$			GD74HCT11		GD54HCT11		UNIT
			MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.	
$t_{PLH}/t_{PHL}$	Propagation delay time nA, nB, nC to nY	4.5		16	28		35		42	ns
$t_{TLH}/t_{THL}$	Output transition time	4.5		7	15		19		22	ns

### AC Waveform

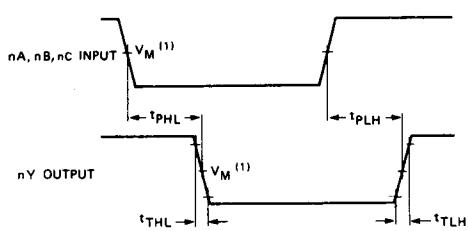

**Fig. 3** Waveforms showing the input ( $nA, nB, nC$ ) to output ( $nY$ ) propagation delays and the output transition times.

### Note to AC waveform

(1) HC :  $V_M=50\%$ ,  $V_i=GND$  to  $V_{CC}$   
HCT:  $V_M=1.3V$ ;  $V_i=GND$  to 3V.