
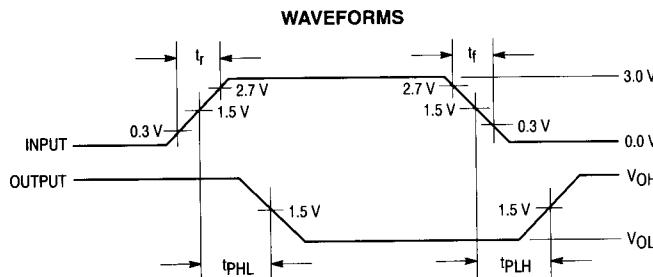


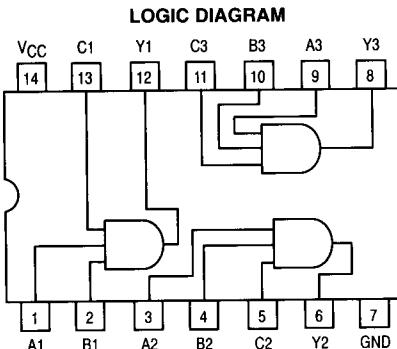


MOTOROLA

Triple 3-Input AND Gate

ELECTRICALLY TESTED PER:
MIL-M-38510/34002

**NOTES:**

- Pulse generator has the following characteristics: $t_r = t_f \leq 2.5$ ns, PRR = 1.0 MHz, and $Z_{OUT} \approx 50 \Omega$.
- Terminal condition (pins not designated may be high ≥ 2.0 V, low ≤ 0.8 V, or open).
- $C_L = 50 \text{ pF} \pm 10\%$, including scope probe, wiring and stray capacitance, without package in test fixture.
- Voltage measurements are to be made with respect to network ground terminal.
- $R_L = 500 \Omega \pm 5.0\%$.

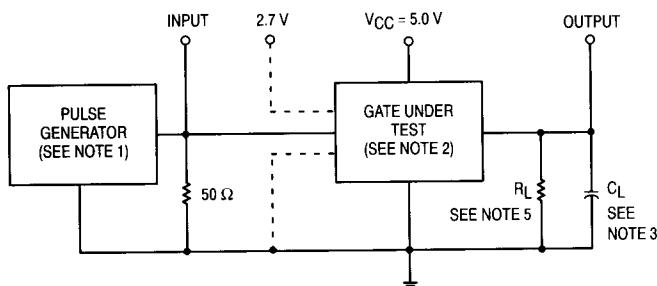AC TEST CIRCUIT**Military 54F11****AVAILABLE AS:**

- JAN: JM38510/34002BXA
- SMD: N/A
- 883: 54F11/BXAJC

X = CASE OUTLINE AS FOLLOWS:
PACKAGE: CERDIP: C
CERFLAT: D
LCC: 2

**THE LETTER "M" APPEARS
BEFORE THE / ON LCC.**

PIN ASSIGNMENTS

FUNCT.	DIL 632-08	FLATS 717-04	LCC 756A-02	BURN-IN (COND. A)
A1	1	1	2	V _{CC}
B1	2	2	3	V _{CC}
A2	3	3	4	V _{CC}
B2	4	4	6	V _{CC}
C2	5	5	8	V _{CC}
Y2	6	6	9	OPEN
GND	7	7	10	GND
Y3	8	8	12	OPEN
A3	9	9	13	V _{CC}
B3	10	10	14	V _{CC}
C3	11	11	16	V _{CC}
Y1	12	12	18	OPEN
C1	13	13	19	V _{CC}
V _{CC}	14	14	20	V _{CC}

BURN-IN CONDITIONS:
V_{CC} = 5.0 V MIN/6.0 V MAX**TRUTH TABLE**

A	B	C	Y
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	0
1	0	0	0
1	0	1	0
1	1	0	0
1	1	1	1

Symbol	Parameter	Limits						Unit	Test Condition (Unless Otherwise Specified)		
	Static Parameters:	+ 25°C		+ 125°C		- 55°C					
		Subgroup 1		Subgroup 2		Subgroup 3					
		Min	Max	Min	Max	Min	Max				
VOH	Logical "1" Output Voltage	2.5		2.5		2.5		V	$V_{CC} = 4.5 \text{ V}$, $I_{OH} = -1.0 \text{ mA}$, $V_{IH} = 2.0 \text{ V}$, (all inputs).		
VOL	Logical "0" Output Voltage		0.5		0.5		0.5	V	$V_{CC} = 4.5 \text{ V}$, $I_{OL} = 20 \text{ mA}$, $V_{IL} = 0.8 \text{ V}$, other inputs = 2.0 V.		
VIC	Input Clamping Voltage		-1.2					V	$V_{CC} = 4.5 \text{ V}$, $I_{IN} = -18 \text{ mA}$, other inputs are open.		
I _H	Logical "1" Input Current		20		20		20	μA	$V_{CC} = 5.5 \text{ V}$, $V_{IH} = 2.7 \text{ V}$, other inputs = GND.		
I _{HH}	Logical "1" Input Current		100		100		100	μA	$V_{CC} = 5.5 \text{ V}$, $V_{IH} = 7.0 \text{ V}$, other inputs = GND.		
I _L	Logical "0" Input Current	-0.03	-0.6	-0.03	-0.6	-0.03	-0.6	mA	$V_{CC} = 5.5 \text{ V}$, $V_{IL} = 0.5 \text{ V}$, other inputs = 5.5 V.		
I _{OD}	Diode Current	60		60		60		mA	$V_{CC} = 4.5 \text{ V}$, $V_{IN} = \text{GND}$, other inputs are open, $V_{OUT} = 2.5 \text{ V}$.		
I _{OS}	Output Short Circuit Current	-60	-150	-60	-150	-60	-150	mA	$V_{CC} = 5.5 \text{ V}$, $V_{IN} = 5.5 \text{ V}$ (all inputs), $V_{OUT} = 0 \text{ V}$.		
I _{CCH}	Power Supply Current		6.2		6.2		6.2	mA	$V_{CC} = 5.5 \text{ V}$, $V_{IN} = 5.5 \text{ V}$ (all inputs).		
I _{CCL}	Power Supply Current		9.7		9.7		9.7	mA	$V_{CC} = 5.5 \text{ V}$, $V_{IN} = 0 \text{ V}$ (all inputs).		
V _{IH}	Logical "1" Input Voltage	2.0		2.0		2.0		V	$V_{CC} = 4.5 \text{ V}$.		
V _{IL}	Logical "0" Input Voltage		0.8		0.8		0.8	V	$V_{CC} = 4.5 \text{ V}$.		
	Functional Tests	Subgroup 7		Subgroup 8A		Subgroup 8B			per Truth Table with $V_{CC} = 5.0 \text{ V}$, $V_{INL} = 0.5 \text{ V}$, and $V_{INH} = 2.5 \text{ V}$.		

Symbol	Parameter	Limits						Unit	Test Condition (Unless Otherwise Specified)		
	Switching Parameters:	+ 25°C		+ 125°C		- 55°C					
		Subgroup 9		Subgroup 10		Subgroup 11					
		Min	Max	Min	Max	Min	Max				
t _{PHL}	Propagation Delay /Data-Output Output High-Low	2.5	5.5	2.0	7.5	2.0	7.5	ns	$V_{CC} = 5.0 \text{ V}$, $C_L = 50 \text{ pF}$, $R_L = 500 \Omega$.		
t _{PLH}	Propagation Delay /Data-Output Output Low-High	3.0	5.6	2.5	7.5	2.5	7.6	ns	$V_{CC} = 5.0 \text{ V}$, $C_L = 50 \text{ pF}$, $R_L = 500 \Omega$.		