

Am25LS139 • Am54LS/74LS139

Dual 2-Line To 4-Line Decoder/Demultiplexer

DISTINCTIVE CHARACTERISTICS

- Two independent decoders/demultiplexers
- Am25LS devices offer the following improvements over Am54/74LS
 - Higher speed
 - 50mV lower V_{OL}
 - Twice the fan-out over military range
 - 440 μ A source current
- 100% product assurance screening to MIL-STD-883 requirements


FUNCTIONAL DESCRIPTION

The Am25LS139 is a dual 2-line to 4-line decoder/demultiplexer unit fabricated using advanced Low-Power Schottky technology. Each decoder has two buffered select inputs A and B which are decoded to one of four Y outputs.


An active LOW enable can be used for gating or can be used as a data input for demultiplexing applications. When the enable is HIGH, all four Y outputs are HIGH, regardless of the A and B inputs.

The Am54LS/74LS139 is a standard performance version of the Am25LS139. See appropriate electrical characteristic tables for detailed Am25LS improvements.

LOGIC DIAGRAM
(One Decoder Shown)

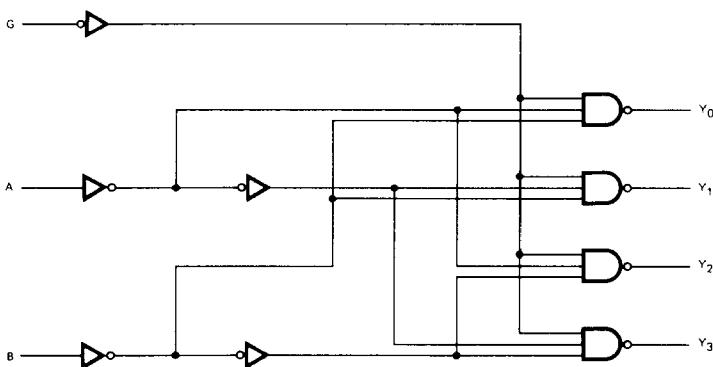


CONNECTION DIAGRAM
Top View



Note: Pin 1 is marked for orientation.

LOGIC SYMBOL

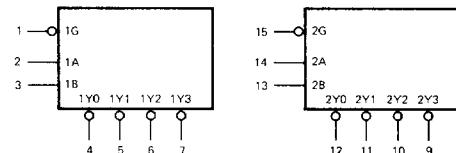

V_{CC} = Pin 16
GND = Pin 8

Am25LS/54LS/74LS139

Am25LS139

ELECTRICAL CHARACTERISTICS

The Following Conditions Apply Unless Otherwise Specified:

COM'L $T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$ $V_{CC} = 5.0V \pm 5\%$ (MIN. = 4.75V MAX. = 5.25V)

MIL $T_A = -55^\circ\text{C}$ to $+125^\circ\text{C}$ $V_{CC} = 5.0V \pm 10\%$ (MIN. = 4.50V MAX. = 5.50V)

DC CHARACTERISTICS OVER OPERATING RANGE

Parameters	Description	Test Conditions (Note 1)		Min.	Typ. (Note 2)	Max.	Units
		MIL	COM'L				
V_{OH}	Output HIGH Voltage	$V_{CC} = \text{MIN.}$, $I_{OH} = -440\mu\text{A}$ $V_{IN} = V_{IH}$ or V_{IL}	MIL	2.5	3.4		Volts
V_{OL}	Output LOW Voltage	$V_{CC} = \text{MIN.}$, $V_{IN} = V_{IH}$ or V_{IL}	$I_{OL} = 4\text{mA}$	2.7	3.4	0.4	
			$I_{OL} = 8\text{mA}$			0.45	
V_{IH}	Input HIGH Level	Guaranteed input logical HIGH voltage for all inputs		2.0			Volts
V_{IL}	Input LOW Level	Guaranteed input logical LOW voltage for all inputs		MIL		0.7	Volts
			COM'L			0.8	
V_I	Input Clamp Voltage	$V_{CC} = \text{MIN.}$, $I_{IN} = -18\text{mA}$				-1.5	Volts
I_{IL}	Input LOW Current	$V_{CC} = \text{MAX.}$, $V_{IN} = 0.4\text{V}$				-0.36	mA
I_{IH}	Input HIGH Current	$V_{CC} = \text{MAX.}$, $V_{IN} = 2.7\text{V}$				20	μA
I_I	Input HIGH Current	$V_{CC} = \text{MAX.}$, $V_{IN} = 7.0\text{V}$				0.1	mA
I_{SC}	Output Short Circuit Current (Note 3)	$V_{CC} = \text{MAX.}$		-15		-85	mA
I_{CC}	Power Supply Current	$V_{CC} = \text{MAX.}$ (Note 4)			6.8	11	mA

Notes: 1. For conditions shown as MIN. or MAX., use the appropriate value specified under Electrical Characteristics for the applicable device type.

2. Typical limits are at $V_{CC} = 5.0\text{V}$, 25°C ambient and maximum loading.

3. Not more than one output should be shorted at a time. Duration of the short circuit test should not exceed one second.

4. I_{CC} is measured with all outputs enabled and open.

MAXIMUM RATINGS (Above which the useful life may be impaired)

Storage Temperature	-65°C to $+150^\circ\text{C}$
Temperature (Ambient) Under Bias	-55°C to $+125^\circ\text{C}$
Supply Voltage to Ground Potential (Pin 16 to Pin 8) Continuous	-0.5V to $+7.0\text{V}$
DC Voltage Applied to Outputs for HIGH Output State	-0.5V to $+V_{CC}$ max
DC Input Voltage	-0.5V to $+7.0\text{V}$
DC Output Current, Into Outputs	30 mA
DC Input Current	-30 mA to $+5.0\text{ mA}$

Am54LS/74LS139**ELECTRICAL CHARACTERISTICS**

The Following Conditions Apply Unless Otherwise Specified:

COM'L TA = 0°C to +70°C V_{CC} = 5.0V ± 5% (MIN. = 4.75V MAX. = 5.25V)MIL TA = -55°C to +125°C V_{CC} = 5.0V ± 10% (MIN. = 4.50V MAX. = 5.50V)**DC CHARACTERISTICS OVER OPERATING RANGE**

Parameters	Description	Test Conditions (Note 1)		Min.	Typ. (Note 2)	Max.	Units
V _{OH}	Output HIGH Voltage	V _{CC} = MIN., I _{OH} = -400μA V _{IN} = V _{IH} or V _{IL}		MIL	2.5	3.4	
				COM'L	2.7	3.4	
V _{OL}	Output LOW Voltage	V _{CC} = MIN., V _{IN} = V _{IH} or V _{IL}	All, I _{OL} = 4mA 74LS only, I _{OL} = 8mA			0.4	
						0.5	
V _{IH}	Input HIGH Level	Guaranteed input logical HIGH voltage for all inputs		2.0			Volts
V _{IL}	Input LOW Level	Guaranteed input logical LOW voltage for all inputs		MIL		0.7	
				COM'L		0.8	Volts
V _I	Input Clamp Voltage	V _{CC} = MIN., I _{IN} = -18mA				-1.5	Volts
I _{IL}	Input LOW Current	V _{CC} = MAX., V _{IN} = 0.4V				-0.36	mA
I _{IH}	Input HIGH Current	V _{CC} = MAX., V _{IN} = 2.7V				20	μA
I _I	Input HIGH Current	V _{CC} = MAX., V _{IN} = 7.0V				0.1	mA
I _{SC}	Output Short Circuit Current (Note 3)	V _{CC} = MAX.		-15		-100	mA
I _{CC}	Power Supply Current	V _{CC} = MAX. (Note 4)			6.8	11	mA

Notes: 1. For conditions shown as MIN. or MAX., use the appropriate value specified under Electrical Characteristics for the applicable device type.

2. Typical limits are at V_{CC} = 5.0V, 25°C ambient and maximum loading.

3. Not more than one output should be shorted at a time. Duration of the short circuit test should not exceed one second.

4. I_{CC} is measured with all outputs enabled and open.

3

SWITCHING CHARACTERISTICS(T_A = +25°C, V_{CC} = 5.0V)

Parameters	Description	Am25LS			Am54LS/74LS			Units	Test Conditions	
		Min.	Typ.	Max.	Min.	Typ.	Max.			
t _{PLH}	Select to Output, 2 Levels of Delay	8	12		13	20		ns	C _L = 15pF R _L = 2.0kΩ	
t _{PHL}		12	18		22	33				
t _{PLH}		13	20		18	29				
t _{PHL}		14	21		25	38				
t _{PLH}		8	12		16	24		ns		
t _{PHL}		12	18		21	32				

**Am25LS ONLY
SWITCHING CHARACTERISTICS
OVER OPERATING RANGE***

Parameters	Description	Am25LS COM'L		Am25LS MIL		Units	Test Conditions	
		T _A = 0°C to +70°C V _{CC} = 5.0V ± 5% Min. Max.		T _A = -55°C to +125°C V _{CC} = 5.0V ± 10% Min. Max.				
t _{PLH}	Select to Output 2 Levels of Delay	20		23		ns	C _L = 50pF R _L = 2.0kΩ	
t _{PHL}		27		32				
t _{PLH}		30		35				
t _{PHL}		31		36		ns		
t _{PLH}		20		23				
t _{PHL}		27		32				

*AC performance over the operating temperature range is guaranteed by testing defined in Group A, Subgroup 9.

DEFINITION OF FUNCTIONAL TERMS

A, B Select. The two select inputs to the decoder.

G Enable. The enable input to the decoder. A HIGH input forces all four Y outputs HIGH regardless of the A and B inputs.


Y₀, Y₁, Y₂, Y₃ The four decoder outputs.

FUNCTION TABLE

INPUTS			OUTPUTS			
ENABLE G	SELECT B	A	Y ₀	Y ₁	Y ₂	Y ₃
H	X	X	H	H	H	H
L	L	L	L	H	H	H
L	L	H	H	L	H	H
L	H	L	H	H	L	H
L	H	H	H	H	H	L


H = HIGH L = LOW X = Don't care

Am25LS • Am54LS/74LS
LOW-POWER SCHOTTKY INPUT/OUTPUT
CURRENT INTERFACE CONDITIONS

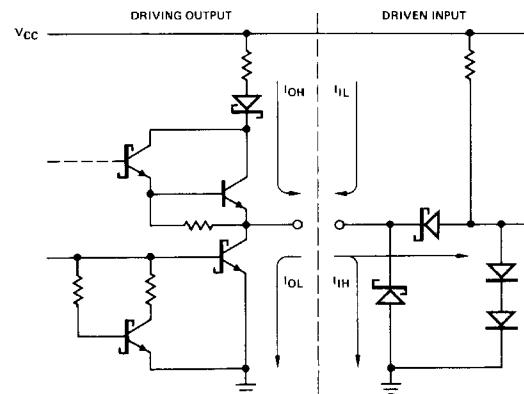


Note: Actual current flow direction shown.

APPLICATIONS

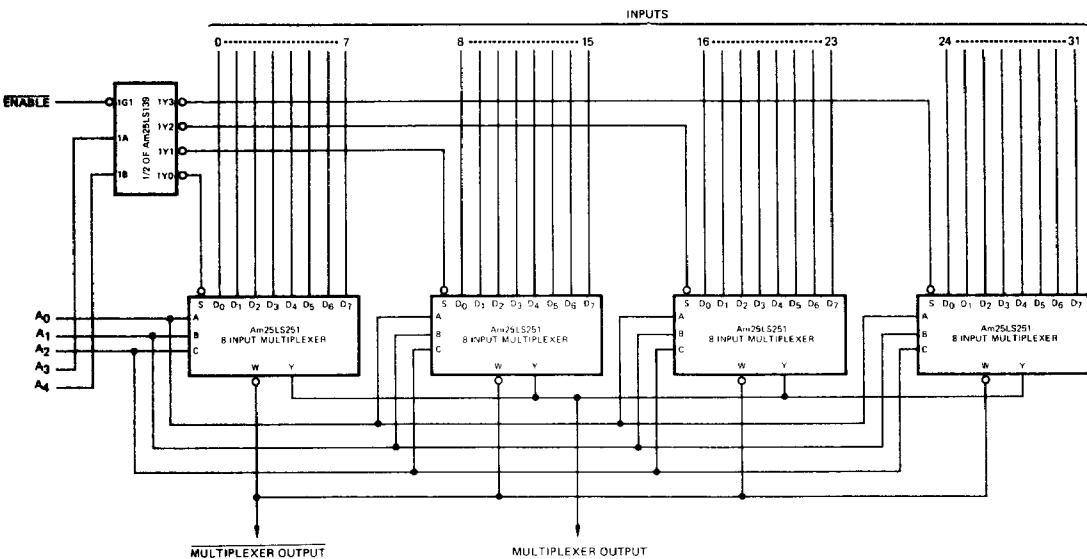


32-INPUT DEMULTIPLEXER

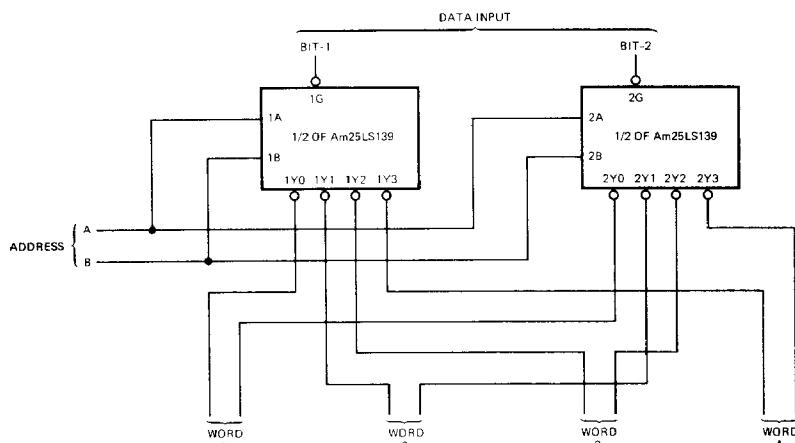

DATA ROUTING USING ONE Am25LS139 AS A DEMULTIPLEXER FOR TWO BITS

Metallization and Pad Layout

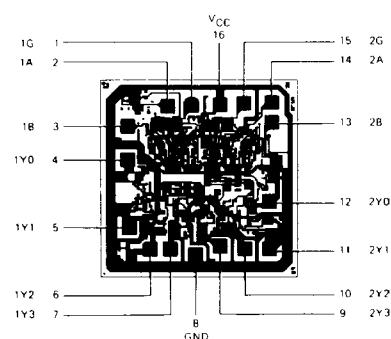

DIE SIZE 0.065" X 0.065"