


- Space-Saving Package Option:
Shrink Small-Outline Package (DB)
Features EIAJ 0.65-mm Lead Pitch
- EPIC™ (Enhanced-Performance Implanted CMOS) 2- μ m Process
- Typical V_{OLP} (Output Ground Bounce)
 < 0.8 V at $V_{CC} = 3.3$ V, $T_A = 25^\circ\text{C}$
- Typical V_{OHV} (Output V_{OH} Undershoot)
 > 2 V at $V_{CC} = 3.3$ V, $T_A = 25^\circ\text{C}$
- ESD Protection Exceeds 2000 V Per MIL-STD-883C, Method 3015; Exceeds 200 V Using Machine Model ($C = 200$ pF, $R = 0$)
- Latch-Up Performance Exceeds 250 mA Per JEDEC Standard JESD-17
- Package Options Include Plastic Small-Outline and Thin Shrink Small-Outline Packages

D, DB, OR PW PACKAGE
(TOP VIEW)**description**

This hex inverter is designed for 2.7-V to 3.6-V V_{CC} operation.


The SN74LVU04 contains six independent inverters with unbuffered outputs. The device performs the Boolean function $Y = \bar{A}$.

The SN74LVU04 is packaged in TI's shrink small-outline package (DB), which provides the same I/O pin count and functionality of standard small-outline packages in less than half the printed-circuit-board area.

The SN74LVU04 is characterized for operation from -40°C to 85°C .

FUNCTION TABLE
(each inverter)

INPUT A	OUTPUT Y
H	L
L	H

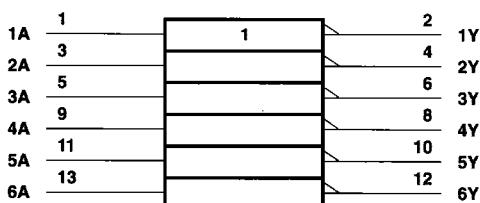logic symbol†**logic diagram, each inverter (positive logic)**

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.

Copyright © 1993, Texas Instruments Incorporated

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**SN74LVU04
HEX INVERTER**

FEBRUARY 1993

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage range, V_{CC}	-0.5 V to 4.6 V
Input voltage range, V_I (see Note 1)	-0.5 V to $V_{CC} + 0.5$ V
Output voltage range, V_O (see Notes 1 and 2)	-0.5 V to $V_{CC} + 0.5$ V
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$)	± 20 mA
Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$)	± 50 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})	± 25 mA
Continuous current through V_{CC} or GND pins	± 50 mA
Maximum power dissipation at $T_A = 55^\circ\text{C}$ (in still air): D package	0.7 W
	DB package	0.4 W
	PW package	0.4 W
Storage temperature range	-65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

2. This value is limited to 4.6 V maximum.

recommended operating conditions (see Note 3)

			MIN	NOM	MAX	UNIT
V _{CC}	Supply voltage		2.7	3.3	3.6	V
V _{IH}	High-level input voltage	V _{CC} = 2.7 V to 3.6 V	2			V
V _{IL}	Low-level input voltage	V _{CC} = 2.7 V to 3.6 V			0.8	V
V _I	Input voltage		0		V _{CC}	V
V _O	Output voltage		0		V _{CC}	V
I _{OH}	High-level output current				-6	mA
I _{OL}	Low-level output current				6	mA
Δt/Δv	Input transition rise or fall rate		0		100	ns/V
T _A	Operating free-air temperature		-40		85	°C

NOTE 3: Unused or floating inputs must be held high or low.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{CC} ‡	MIN	TYP	MAX	UNIT
V _{IK}	I _I = -18 mA	2.7 V			-1.5	V
V _{OH}	I _{OH} = -100 µA	MIN to MAX				V
	I _{OH} = -6 mA	3 V				
V _{OL}	I _{OL} = 100 µA	MIN to MAX				V
	I _{OL} = 6 mA	3 V				
I _I	V _I = V _{CC} or GND	3.6 V			±1	µA
I _{OZ}	V _O = V _{CC} or GND	3.6 V			±5	µA
I _{CC}	V _I = V _{CC} or GND, I _O = 0	3.6 V			20	µA
ΔI _{CC}	V _{CC} = 3 V to 3.6 V, Other inputs at V _{CC} or GND	One input at V _{CC} - 0.6 V,			500	µA
C _i	V _I = V _{CC} or GND	3.3 V	TBD			pF
C _o	V _O = V _{CC} or GND	3.3 V	TBD			pF

[‡] For conditions shown as MIN or MAX, use the appropriate values under recommended operating conditions.