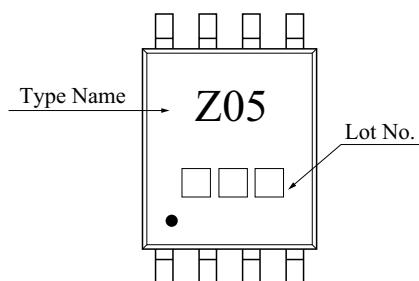


TRIPLE INVERTER (OPEN DRAIN)

FEATURES


- High output drive : $\pm 24\text{mA}(\text{min.})$ @ $V_{CC}=3\text{V}$.
- Super high speed operation : $t_{pd} 2.3\text{ns}(\text{typ.})$ @ $V_{CC}=5\text{V}$, 50pF .
- Operation voltage range : $V_{CC(\text{opr})}=1.65\sim 5.5\text{V}$.
- Latch-up performance : $\pm 500\text{mA}$ or more
- ESD performance : $\pm 200\text{V}$ or more (EIAJ)
 $\pm 2000\text{V}$ or more (MIL)
- Power down protection is provided on all inputs and outputs.

MARKING

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Supply Voltage	V_{CC}	-0.5~6	V
DC Input Voltage	V_{IN}	-0.5~6	V
DC Output Voltage	V_{OUT}	-0.5~6	V
Input Diode Current	I_{IK}	-20	mA
Output Diode Current	I_{OK}	-20	mA
DC Output Current	I_{OUT}	50	mA
DC V_{CC} /ground Current	I_{CC}	± 50	mA
Power Dissipation	P_D	200	mW
Storage Temperature Range	T_{stg}	-65 ~ 150	°C
Lead Temperature (10s)	T_L	260	°C

PIN CONNECTION(TOP VIEW)

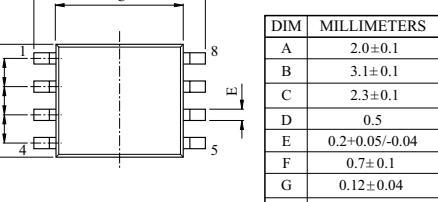

US8


KIC7WZ05FK

Truth Table

A	Y
L	* H
H	L

* : High impedance

Logic Diagram

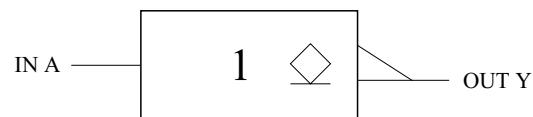

Recommended Operating Conditions

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	1.65~5.5	V
		1.5~5.5 (Note1)	
Input Voltage	V _{IN}	0~5.5	V
Output Voltage	V _{OUT}	0~5.5 (Note2)	V
		0~V _{CC} (Note3)	
Operating Temperature	T _{opr}	-40~85	°C
Input Rise and Fall Time	d _{r/d_v}	0~20 (V _{CC} =1.8V ±0.15V, 2.5V ±0.2V)	ns/V
		0~10 (V _{CC} =3.3V ±0.3V)	
		0~5 (V _{CC} =5.5V ±0.5V)5	

Note1 : Data retention only, Note2 : V_{CC}=0V, Note3 : High or low state

ELECTRICAL CHARACTERISTICS

DC Characteristics

CHARACTERISTIC	SYMBOL	TEST CONDITION		Ta=25 °C			Ta=-40~85 °C		UNIT
			V _{CC} (V)	MIN.	TYP.	MAX.	MIN.	MAX.	
Input Voltage	V _{IH}	-	1.65~1.95	0.75 × V _{CC}	-	-	0.75 × V _{CC}	-	V
			2.3~5.5	0.7 × V _{CC}	-	-	0.7 × V _{CC}	-	
	V _{IL}	-	1.65~1.95	-	-	0.25 × V _{CC}	-	0.25 × V _{CC}	
			2.3~5.5	-	-	0.3 × V _{CC}	-	0.3 × V _{CC}	
Output Voltage	V _{OL}	V _{IN} =V _{IL}	1.65	-	0	0.1	-	0.1	V
			2.3	-	0	0.1	-	0.1	
			3.0	-	0	0.1	-	0.1	
			4.5	-	0	0.1	-	0.1	
			I _{OH} =4mA	1.65	-	0.08	0.24	-	0.24
			I _{OH} =8mA	2.3	-	0.1	0.3	-	0.3
			I _{OH} =16mA	3.0	-	0.15	0.4	-	0.4
			I _{OH} =24mA	3.0	-	0.22	0.55	-	0.55
			I _{OH} =32mA	4.5	-	0.22	0.55	-	0.55
Input Leakage Current	I _{IN}	V _{IN} =5.5V or GND	0~5.5	-	-	±1	-	±10	µA
Off-state Current	I _{OZ}	V _{IN} =V _{IL} , V _{OUT} =V _{CC} or GND	5.5	-	-	±5	-	±10	µA
Power Off Leakage Current	I _{OFF}	V _{IN} or V _{OUT} =5.5V	0.0	-	-	1	-	10	µA
Quiescent Supply Current	I _{CC}	V _{IN} =5.5V or GND	1.65~5.5	-	-	1	-	10	µA


KIC7WZ05FK

AC Characteristics (unless otherwise specified, Input : $t_r=t_f=3\text{ns}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION		Ta=25 °C			Ta=-40~85 °C		UNIT
		V _{CC} (V)	MIN.	TYP.	MAX.	MIN.	MAX.		
Propagation delay time	t_{PZL}	$C_L=50\text{pF}, R_L=500 \Omega$	1.8 ±0.15	1.8	5.5	9.5	1.8	10.5	ns
			2.5 ±0.2	1.2	3.7	5.8	1.2	6.4	
			3.3 ±0.3	0.8	2.9	4.4	0.8	4.8	
			5.0 ±0.5	0.5	2.3	3.5	0.5	3.9	
	t_{PLZ}	$C_L=50\text{pF}, R_L=500 \Omega$	1.8 ±0.15	1.8	4.3	9.5	1.8	10.5	ns
			2.5 ±0.2	1.2	2.8	5.8	1.2	6.4	
			3.3 ±0.3	0.8	2.1	4.4	0.8	4.8	
			5.0 ±0.5	0.5	1.4	3.5	0.5	3.9	
Input Capacitance	C_{IN}	-	0~5.5	-	3.0	-	-	-	pF
Output Capacitance	C_{OUT}	-	0~5.5	-	3.0	-	-	-	pF
Power Dissipation Capacitance	C_{PD}	(Note)	3.3	-	5.2	-	-	-	pF
			5.5	-	8.5	-	-	-	

Note : C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation : $I_{CC(\text{opr})}=C_{PD} \cdot V_{CC} \cdot f_{IN}+I_{CC}/3$

TEST CIRCUIT

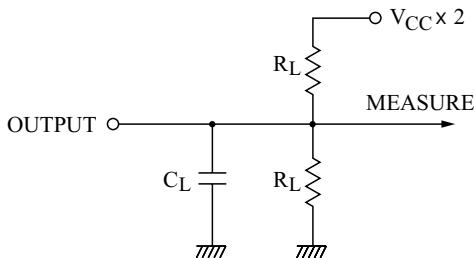

AC Waveform

